



Soft
Wind



ECO
2.0



Fast Cooling
& Heating



Auto
Cleaning



3 Proof
Of Odu PCB

C Series




CM



CA

Main selling points

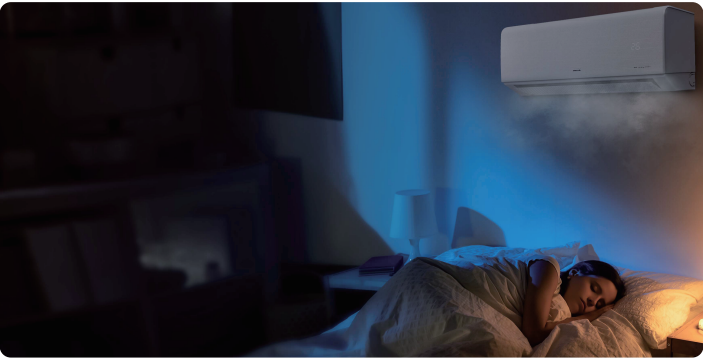

SOFT WIND

Set mode in SOFT, diverted, dispersed and softened cold air blows out through over 3000 (24K) micro vents with low noise in indoor operation, ideal to use for sleeping.

Micro vents: 1935 (12K) 2921 (18K) 3206 (24K)
Patent No.: 202330228912.4



QUIET

Low noise in indoor operation, making you sleep well. Perfect to use while sleeping.



VOICE CONTROL

Easily operate the Ac from across the room with simple voice commands, no need remote control or app.

(only for CM)



WIFI

Intelligent WiFi control, convenient operation, achieving remote control of AC through mobile phone and thus leading a smart life.

(only for CM)

Specifications

				CA				CM	
AUX RAC Model			Unit	ASW-H09B7A4 /CAR3DI-C3	ASW-H12C5A4 /CAR3DI-B8	ASW-H18E3A4 /CAR3DI-C0	ASW-H24G3B4 /CAR3DI-B9	ASW-H09B7B4 /CMR3DI-D0	ASW-H12C5A4 /CMR3DI-D0
Nameplate Parameter	Rated Capacity	Cooling	W	2700(600-4000)	3500(800-4200)	5400(1300-5900)	7300(1800-7400)	2700(600-4000)	3500(800-4300)
		Heating	W	3200 (800-4200)	3850(1000-4200)	5600(1300-6000)	7300(1800-7400)	3300 (800-4200)	4200(800-4300)
	Rated Power Consumption	Cooling	W	780(100-1200)	1180(100-1600)	1650(290-2100)	2200(230-2700)	720(100-1200)	870(200-1450)
		Heating	W	840(200-1200)	1100(300-1600)	1550(250-1800)	2200(230-2530)	800(200-1200)	1060(200-1450)
	Max. Input Power		W	1600	1900	2400	3400	1600	1500
	Max. Input Current		A	9	9.5	12	16	9	9
	SEER Cooling		W/W	7.5	7.1	7.1	6.5	8.5	8.5
	SCOP Heating		W/W	4.2	4.1	4.6	4.1	4.6	4.6
	Power Supply Source		V/Ph/Hz	220-240V-1-50Hz					
	Refrigerant			R32					
	Air Flow Volume		m3/h	650	650	950	1300	700	650
	Indoor Unit Weight(Net)		Kg	7.5	8	11	13	8	8.5
	Outdoor Unit Weight(Net)		Kg	23	22	28.5	39	22.5	23.5
IDU	Dimension	Net Dimension(WxDxH)	mm	774*298*202	774*298*202	997*312*222	1145*332*230	774*299*202	834*299*202
		Packing Dimension(WxDxH)	mm	831*371*282	831*371*282	1070*385*327	1210*400*327	831*371*282	891*371*282
Connection	Stop Valve	Liquid Valve		6	6	6	6	6	6.35
		Gas Valve		9	9	12	15.88	9	9.52
ODU	Dimension	Net Dimension(WxDxH)	mm	708*258*530	705*530*279	785*555*300	900*700*350	709*280*536	705*279*530
		Packing Dimension(WxDxH)	mm	825*345*595	825*595*345	888*367*590	1020*770*430	825*345*595	825*345*595