

Technology Leads Intelligent Life



Official Accounts

NINGBO AUX ELECTRIC CO.,LTD

Add: No. 1517, East Section of Yincheng Avenue, Jiangshan, Yinzhou, Ningbo, Zhejiang, P. R. China
Tel: +86-574-88220564

2025

GROUP PROFILE



Established in 1986, AUX Group is an enterprise group which covers several industries: air conditioning, power utilization, power distribution, new energy and medical service. For many years we have ranked China's top 500 enterprises.

In 2024, the group's sales reached RMB 90.2 billion, with total assets of RMB 70.1 billion. We have over 40,000 employees, and 14 manufacturing bases in Ningbo (4), Nanchang, Tianjin, Ma'anshan, Zhengzhou, Wuhu, Brazil, Indonesia, Thailand, Poland, Germany and Mexico, and 6 R & D centers worldwide. AUX is a leading producer of Smart Meter and Power Box in its sector. Currently, we have invested and operated 50 medical institutions.

It owns 2 listed companies (601567.SH, 02080.HK). As a National-Recognized Enterprise Technology Center, a Technology Innovation Model Enterprise, National Intellectual Property Demonstration Enterprise and a National Post-doctoral Workstation, it owns two globally famous brands: AUX and Sanxing, which are worth over RMB 56 billion^①.

When AUX is working on its development, it also cares about performing its social responsibilities. In the past years, we have donated RMB 309 million in total to various public programs, such as the field of targeted poverty alleviation, education, disaster relief and environment protection.

In the new era, aiming to become a world-class enterprise, AUX will keep carrying out the mission of "Leading smart living and cultivating great talents", and work hard to achieve the strategic goal of "100 billion market value, 100 billion sales and 10 billion profit".

Ref. AUX Group Official Website: <https://en.auxgroup.com>
Annotation: ① The data originates from World Brand Lab

90.2
Billion Yuan

14
Manufacturing
Bases

1986
Founded

6
R&D Centers

2
Listed
Companies

MILESTONE

Start-up & development (1986-2010)

Started from scratch, developed by self-improvement, completed the existing industrial structure

1986

started business

1994

Entered the air-conditioning industry and created the brand of AUX

2003

Entered The CAC Field

2009

Entered the investment industry

2004

Got CNAS Certification

1989

Entered the meter industry and later created the brand of Sanxing

2000

Enter the real estate industry

2011

Sanxing Electrical (601567.SH) was listed in Shanghai Stock Exchange and later renamed as "Sanxing Medical"

Transformation and future (2011-present)

Took the first step in mindset changes, industrial transformation, capital transformation and strategy transformation

2012

Successively set up R&D centers in Hangzhou and Ningbo.

2015

Built overseas plants in Brazil and Indonesia

2014

Established the medical group to deploy the medical and health strategy

2016

The scale of air-conditioners jumped to the third place in the industry.

2018

Prepared to build production bases in Thailand and Zhengzhou Dedicated to making AUX Japanese R&D Center a global home appliance R&D highland

2021

Became the official exclusive supplier of air conditioners for the 19th Asian Games Hangzhou 2022

2023

Established sales companies in Malaysia, Thailand and the United States.

2020

Zhengzhou Intelligent Home Appliance Manufacturing Base Project started

Product Lineup

Modular VRF Outdoor Unit

ARV 7: Scroll series

Capacity	(kW)	25.2	28.0	33.5	40.0	45.0	50.4	56.0	61.5	68.0	73.5	78.5	85.0	90.0	95.2	101
	(HP)	8	10	12	14	16	18	20	22	24	26	28	30	32	34	36



8/10/12HP



14/16HP



18/20/22HP



24/26/28/30/32/34/36HP



38-72HP



74-108HP



110-144HP



Product Lineup

Mini VRF Outdoor Unit

Capacity(kW)	8	10	12	14	16	18	20	22	25.2	28	33.5
ARV Mini		●	●	●	●	●	●	●	●	●	●

Indoor Unit(DC)

Capacity(kW)	Appearance	1.5	2.2	2.8	3.6	4.5	5.6	7.1	8.0	9.0	10.0	11.0	11.2	12.5	14.0	15.0	16.0
Compact Cassette		●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●
Cassette								●	●	●	●	●	●	●	●	●	●
Cassette Q						●	●	●	●	●	●	●	●	●	●	●	●
Slim Duct(Q)		●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●
Mid ESP Duct						●	●	●	●	●	●	●	●	●	●	●	●
Wall-mounted J		●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●
Wall-mounted C									●	●	●	●	●	●	●	●	●
Ceiling&Floor						●	●	●	●	●	●	●	●	●	●	●	●
Capacity(kW)	Appearance	22.0										28.0					
High ESP Duct								●									●
Fresh Air Processor								●									●

Indoor Unit (AC)

Capacity(kW)	Appearance	2.2	2.8	3.6	4.5	5.6	7.1	8.0	9.0	10.0	11.2	12.5	14.0	15.0	45.0	56.0	
Cassette								●	●	●	●	●	●	●	●	●	
Mid ESP Duct					●	●	●	●	●	●	●	●	●	●	●	●	
High ESP Duct										●	●	●	●	●	●	●	
Capacity(kW)	Appearance	45.0										56.0					
Fresh Air Processor								●								●	

AHU Kit


Mode	Appearance	ARVK-0B	ARVK-00B	ARVK-01B	ARVK-02B	ARVK-03B
ARVK		●	●	●	●	●

Heat Recovery Ventilator


Air Volume(m ³ /h)	Appearance	200	300	400	500	800	1000	1500	2000	2500	3000	4000	5000
HRV		●	●	●	●	●	●	●	●	●	●	●	●

Product Lineup

Indoor Unit

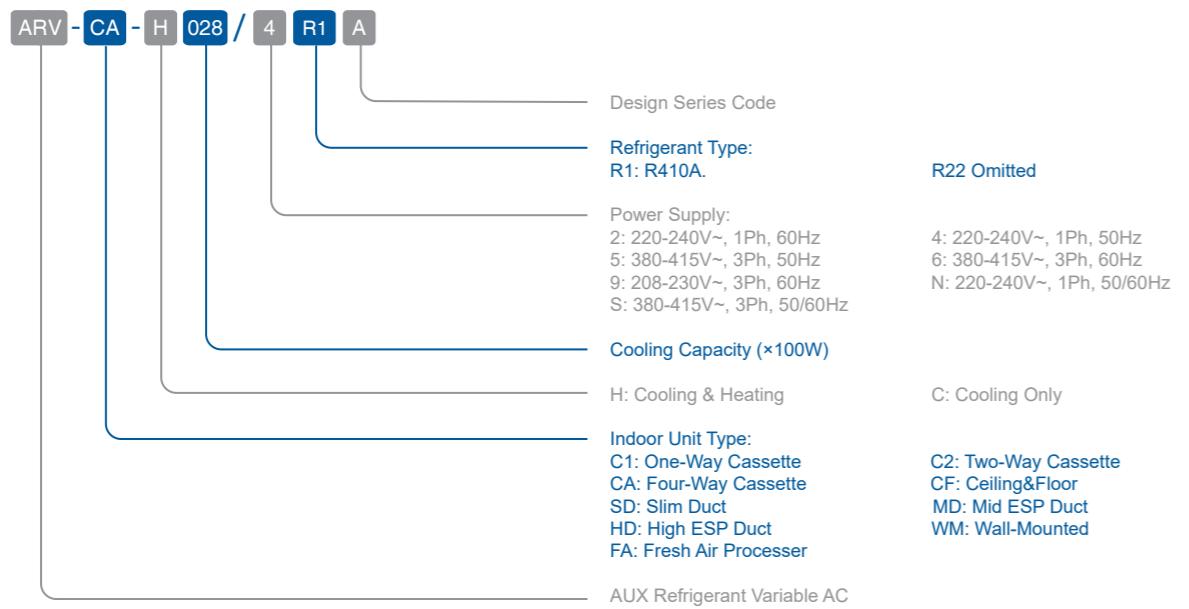

Outdoor Unit

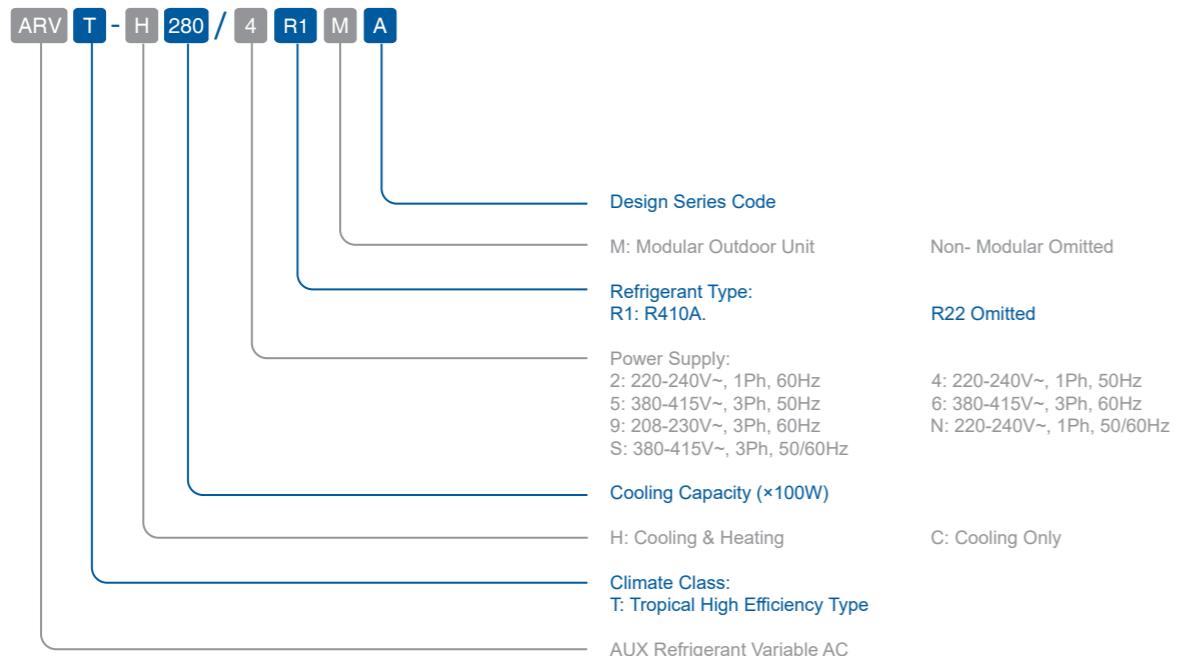

VER Technology

► Variable Energy-efficiency Regulation

Evaporating and condensing temperature makes strong effect to the cooling and heating performance and energy-efficiency ratio of AC system.

Thanks to VER technology, ARV7 series has various modes with different refrigerant temperature which lead the system to different performance and energy-efficiency ratio.


Cooling: 3 modes with different evaporating temperature.

Heating: 3 modes with different condensing temperature.

Turbo mode
High cooling and heating performance, cool down or warm up the room rapidly.

Basic mode
Default mode, balance the reaction speed and efficiency.

High efficiency mode
Satisfy the lowest capacity requirement and low the energy consumption.


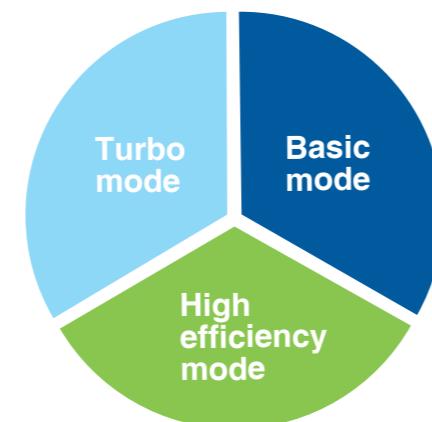


Users can choose a certain mode according to the actual need in different area and climate, so that the system can satisfy various requirement, and the seasonal efficiency can be optimized.

► High EER And COP

ARV 7 Series achieves the industry's top class energy efficiency in cooling and heating by utilizing all DC inverter compressors, and Enhanced vapor injection.


The cooling EER is up to 4.75 and the heating COP is up to 5.48 in the 8HP category.

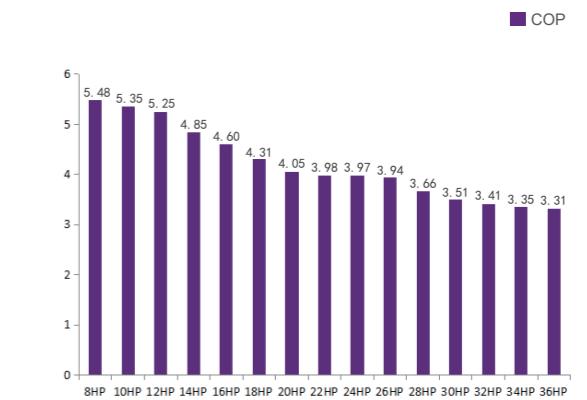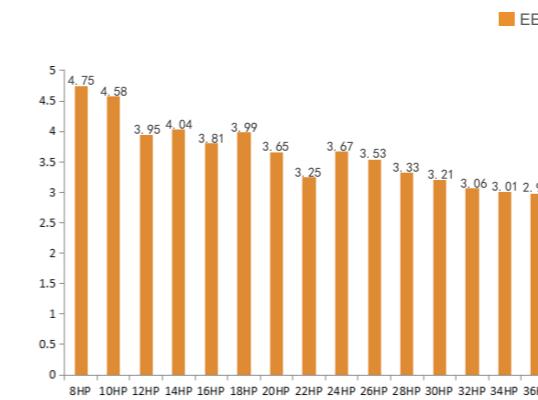


* Data from certification report: ERP, certification number: AHEE211200054953

► 180° Sine Wave Control

DC inverter compressor users 180° sine wave vector control technique makes motor operate smooth and increases the efficiency significantly compared with traditional sawtooth wave. It also can lower the noise level.

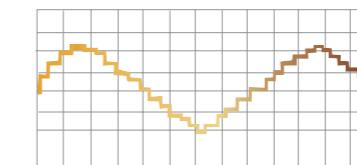

Traditional Control

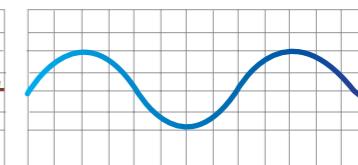

180° Sine Wave DC Control


► High efficiency DC fan motor

The DC brushless motor adjusts the fan speed according to the system pressure and operating load, resulting in a significant increase in efficiency, and the Super Aero fan provides greater air volume and higher static pressure.




Panasonic

► Enhanced Vapor Injection DC Inverter Compressor

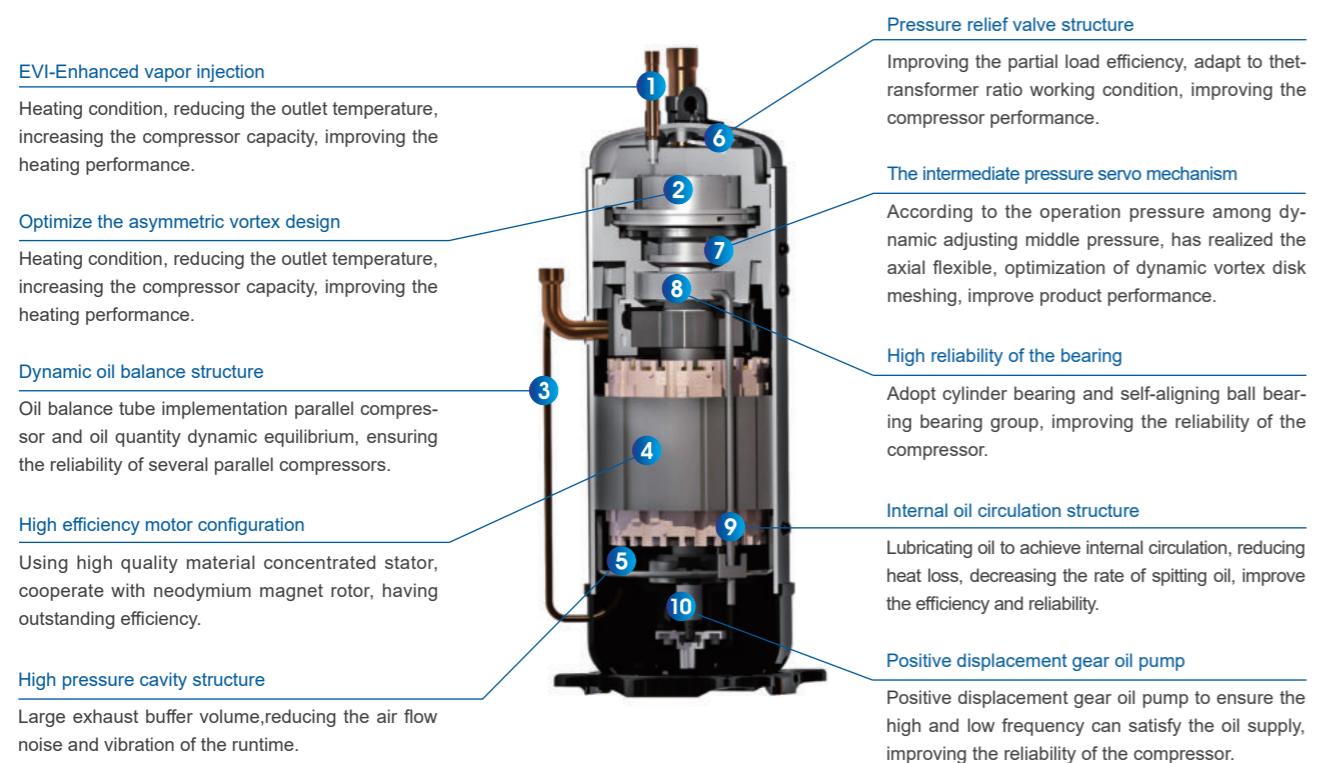


► High-efficient permanent magnetic motors are installed, giving better performance than traditional DC inverter compressors.

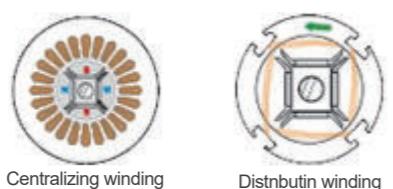


Better performance and smaller size than traditional DC inverter compressors.

► High Efficient Heat Exchanger

Optimized 2 to 1 refrigerant circuit design, increase the heat exchanging efficiency and enhance the ratio of liquid which flow to the evaporator.

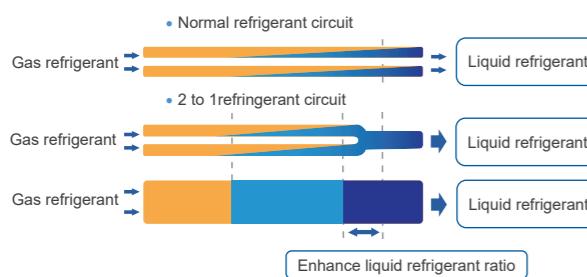

► Optimized fin design for reduced water resistance and wind resistance.


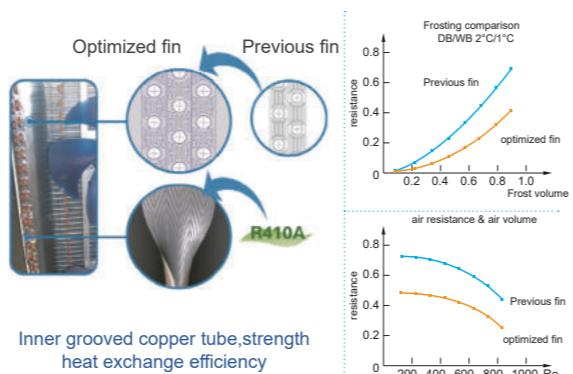


► 2-stage Sub-cooling Technology

The first stage sub-cooling process due to optimized refrigerant circuit and "Inverse fin type" window fin design.



The second stage sub-cooling process by a high efficiency plate heat exchanger with a sub-cooling EXV.

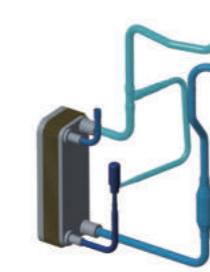

► 4-times Anticipation Energy-saving Control Technology

Module anticipation energy-saving control technology

In partial load, intelligent judgment single operation and the efficiency of the module keep the minimum power consumption.



Compressor anticipation energy-saving adjustment technology

Control compressors quantity and operating frequency, to get higher energy efficiency ratio in partial load.




Fan anticipation energy-saving adjustment technology

Control running quantity and operating frequency, obtain higher energy efficiency ratio under partial load.



Refrigerant anticipation energy-saving technology adjustment

Adjust the opening of the electronic expansion valve, to improve the effect of condenser heat transfer, to get higher energy efficiency ratio under partial load.

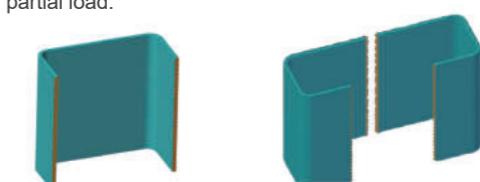

Wide Application Range


► Large Capacity&Free Combination

15 basic models from 8HP to 36HP.
Less quantity of system, space saving, easy installation and low cost.



► Wide Operation Range


No matter in hot summer or cold winter, ARV 7 can supply comfortable environment for users.

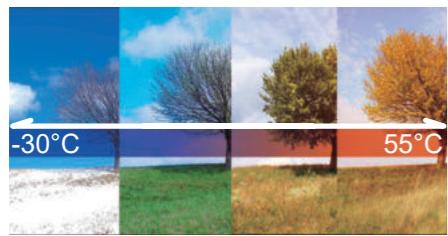

*Data derived from AUX Performance Lab, June 13, 2023

► Wide Voltage Design

In Country with unstable voltage, ARV system still could run stably.

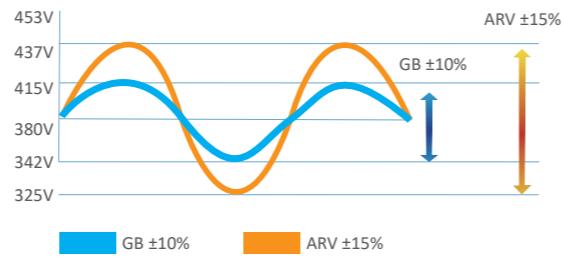

*Data sourced from AUX Performance Laboratory on January 30, 2024

► Changeable ESP


The optimized fan can provide outdoor units with static pressures of up to 70Pa (8-22HP) and 80Pa (24-36HP), which can be installed on the service floor or facility room.



*Data sourced from AUX Performance Laboratory on June 13, 2024

► Long Piping Length


Thanks to the DC inverter control technology and sub-cooling circuit technology, it is possible to design a system with longer piping and elevation difference which make it easier to design and installation.

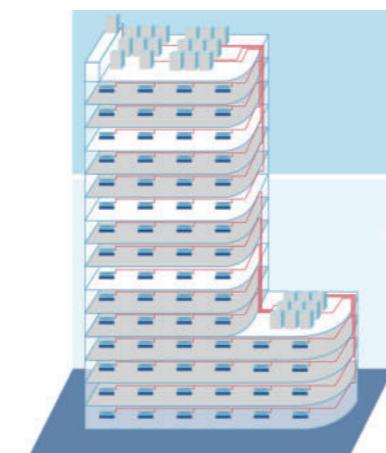

Comfortable And Healthy Environment

► 12 levels silent modes


"6-levels night silent modes.
6-levels daytime silent modes".

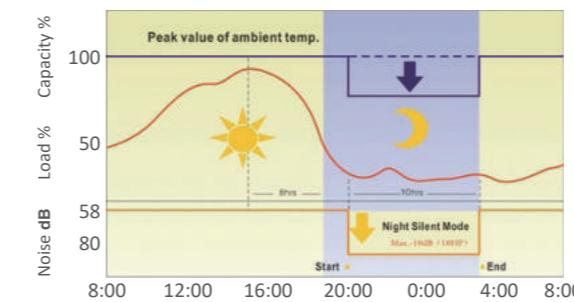

*Data sourced from AUX laboratory on November 15, 2022

Indoor Unit Quiet Mode


Innovative centrifugal fan for large diameter and a new design of the spiral duct system equipped with high-quality motor at the same time, making the air supply more quietly and smoothly.

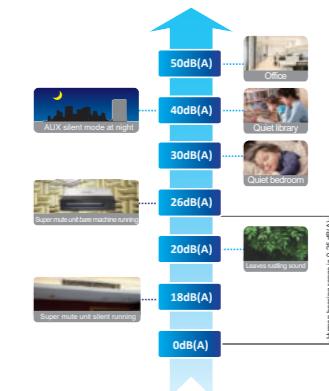

► Intelligent Defrosting


Variable parameters defrost through temperature and pressure sensors, to grasp time accurately which can defrost or heat normally.

Base on the main unit and at the end of the EXV control the output, fast bolt in liquid refrigerant system, unit operation is more stable; Through the dry run, defrosting exhaust temperature higher, more complete, more conventional. Shorter defrost time. Refrigerant pipeline design to ensure outdoor heat exchanger bottom no frost during heating and ice water mixture discharge smoothly when defrosting.

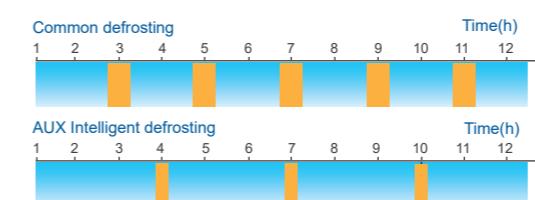


► Fast Warm Up And Cool Down

The DC Inverter Compressor system reaches full load rapidly providing less temperature fluctuation and an improved living environment, bring great user experience.

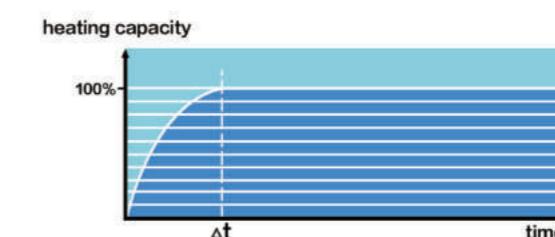

► Precise Temperature Control


Adopting composite temperature control technology, the set temperature can reach ± 0.5 °C.

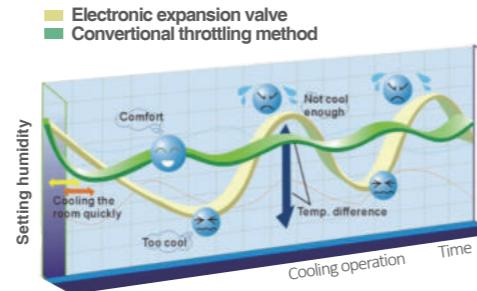

► Humanization Design

VIP Function


Special VIP control function, the VIP room will decide the whole system operation mode, prior to other mode or economic locking function, ensure the priority of the important room.

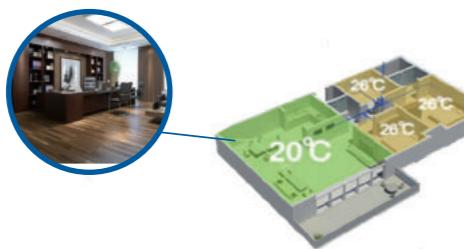

Auto Restart Function

The AC can automatically memorize the operation setting when power is cut off accidentally. It can return to previous setting when power resumes.

Recover the former operation state when power is restored, no need restart the unit manually

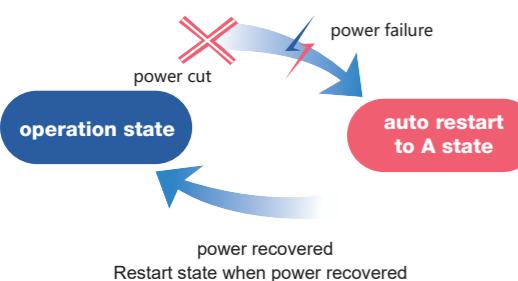

Economic Locking Function


Special design economic locking function, through outdoor PCB switch setting. If work in economic lock, AC lowest work cooling temperature will keep in 26°C and highest heating temperature keep 20°C.



Easy Installation & Maintenance


► Installation space saving

The ARV 7 Series has larger capacity and smaller size, the capacity of the single unit can reach 36HP. For many large projects, the benefits of space-saving are particularly obvious.

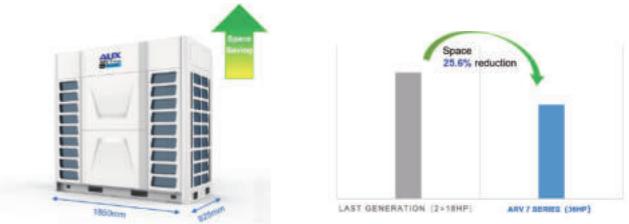


► No Oil Balance Pipe Between ODUS

High efficient oil/gas separating tech, make the system oil balance between compressors without oil balance pipe.

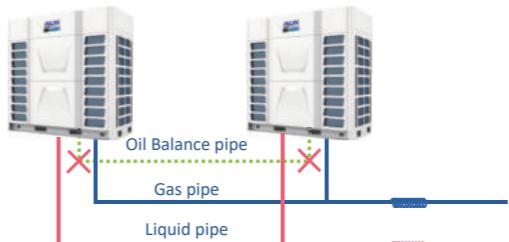

► Centralized controller without Mini gateway

ARV 7 doesn't need Mini Gateway to connect CC02 or BMS system, making installation easier and more convenient.

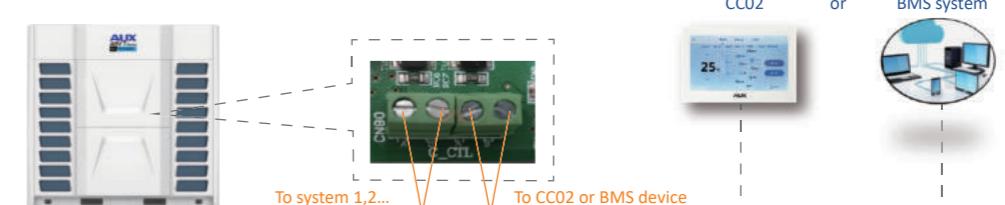


Same function: CC02 (Max. 64 systems & 256 indoor units); MODBUS (Max. 255 systems)

► Auto Commissioning

When commissioning, the outdoor mainboard can check the operation state and show the corresponding error code in engineering mode.

Find out the faults when commissioning, enhance the reliability of the system.

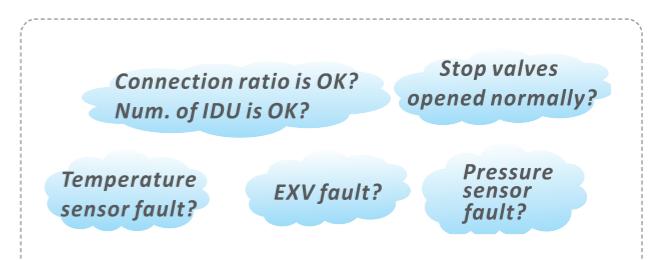

► Auto Refrigerant Recycling& Auto Refrigerant Charging

Refrigerant can be recycled to the outdoor units when maintenance is need.

The outdoor unit can adjust the refrigerant amount according to the operation parameters such as pressure and temperature, and remind the installation personnel to stop charging.



► One Button Test Run

Press the button lightly once in the main PCB board of the master ODU, to realize the cooling and heating test run, don't need to open indoor machine one by one.



► Auto Dust Removal & Auto Snow-Blowing

The outdoor fan can rotate in reverse direction to remove dust on heat exchanger to ensure the heat exchange performance.



► Black BOX Function

Using aviation grade Black BOX technique, memorizing operation parameters before the failure, finding fault information quickly, as an accurate, efficient maintenance services to provide valuable information, maintenance more convenient.



► Pipe-connecting Mode

ARV- 7 series can be on the front, left side, right side to choose pipe-connecting direction freely, it's easy to install.



Reliable & Stable


► Seven-levels of limit electricity usage

The unit has the function of energy saving and power limiting (40% - 100% output power limit). Users can choose the automatic energy saving mode. The system optimizes the output based on changes in ambient temperature, improving the comprehensive operating energy efficiency of the unit.



* Data from AUX Laboratory on November 20, 2022.


► EPS(emergency power source) control

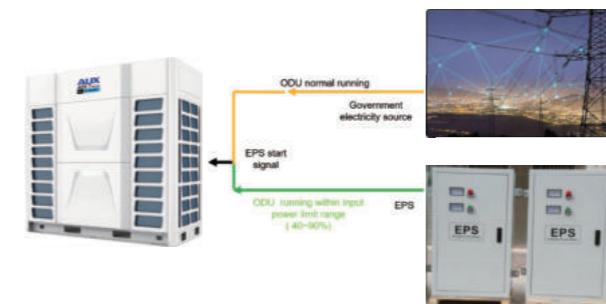

If Government electricity abnormal ,will start the EPS to supply electricity.

► Refrigerant PCB Cooling System

The PCB is well cooled by the refrigerant, ensuring the system operate steadily even in tropical area. Frequency limit of inverter compressor can be relaxed, so that the output capacity of ODU can be higher than conventional products.

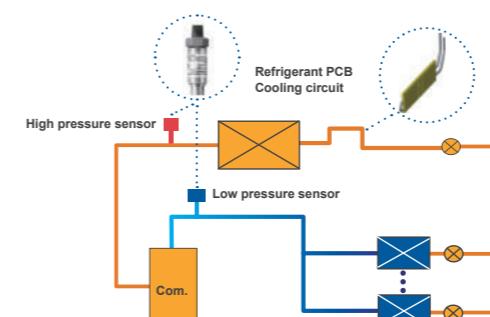


► Precise Refrigerant Control

Real-time monitoring the discharge and suction pressure of the system.

The output of compressors and the EXV open degree can be regulated precisely to optimize the compression ratio.

Ensuring the compression ratio always in safety zone.

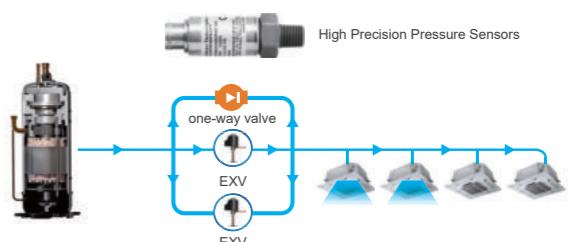

► Module Alternate Operation


In one combination system,any module could run as the master unit according to the running time.Balance the life of the outdoor units in one system.



► Back-Up Operation Technology

Module Emergency

As one module breaks down, module emergency can be set, then the rest modules in same combination can run normally.

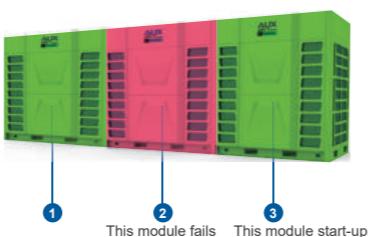


Compressor Emergency

As one compressor breaks down, compressor emergency can be set, then another compressor in this unit can run normally.



Fan motor backup.

Allowing time for maintenance or repair while comfort remains guaranteed.

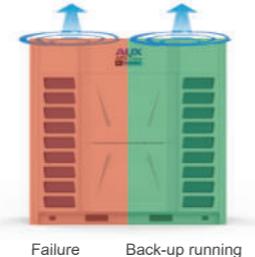

► All-round Protection



► Shell reinforcement design

1. Integrated side plate, 4-sided bottom beam
2. The triangle is stable to prevent deformation of the side plate
3. Resistance to lateral shear force, preventing separation of chassis and crossbeam
4. Large fillet, reinforced support to prevent distortion and deformation

► Oil Return Control Technology

Dynamic Oil Return Control Technology


Monitor compressor running state and running time, computing system reasonable oil return time.

6-Step Oil Separating Technology



Completely solve the problem of oil, the system more stable and reliable

Compressor Throwing Oil Technology

When the compressor oil level higher than the warning line, system through tubing eliminate redundant frozen oil, keep the oil balance between compressor.

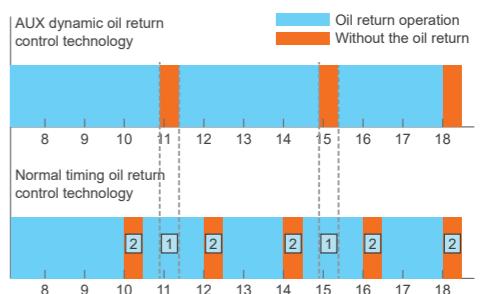

1 Need oil return but there was no oil return operation, which can't guarantee the system stability and reliability.
2 Without oil return operation is to carry on the oil return operation, which cause unnecessary waste.

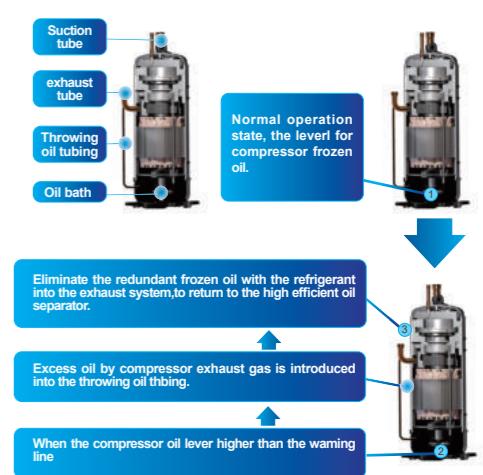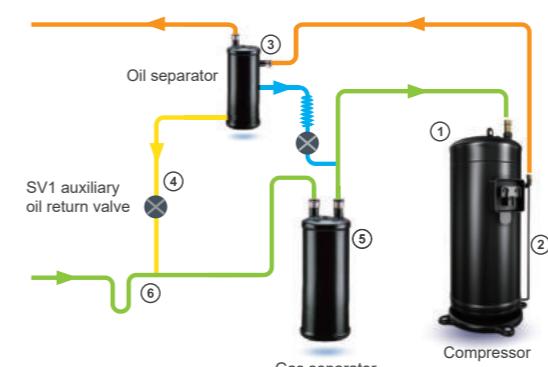

* Data from AUX Performance Lab on November 25, 2021.

► Three-phase relay

the ODU can be equipped with three-phase relays to effectively protect the PCB from voltage fluctuations.



► Complete Solutions

Provide diversified solutions, including VRF selection software, BIM models, and CFD simulations.

ARV 7 Series



ARV 7 Series



Flexible Outdoor Unit Combination															
HP	8	10	12	14	16	18	20	22	24	26	28	30	32	34	36
38				★					★						
40				★						★					
42				★						★					
44					★					★					
46						★				★					
48						★				★					
50							★		★						
52								★★							
54						★					★				
56						★					★				
58							★				★				
60							★				★				
62								★			★				
64								★			★				
66									★		★				
68									★		★				
70									★		★				
72										★	★★				
74				★				★			★				
76				★					★		★				
78					★				★		★				
80					★				★		★				
82						★			★		★				
84							★		★		★				
86								★	★		★				
88									★★		★				
90										★★					

Flexible Outdoor Unit Combination															
HP	8	10	12	14	16	18	20	22	24	26	28	30	32	34	36
92									★					★★	
94										★				★★	
96											★			★★	
98											★			★★	
100											★			★★	
102												★		★★	
104												★		★★	
106													★	★★	
108														★★★	
110												★★★		★	
112											★★	★	★		
114											★★	★	★		
116											★★		★★		
118											★	★	★★		
120											★	★	★★		
122											★		★★★		
124												★		★★★	
126												★	★★★		
128														★★★★	
130											★			★★★	
132												★		★★★	
134												★		★★★	
136												★		★★★	
138												★		★★★	
140													★	★★★	
142														★★★	
144														★★★★	

*The above combination types are factory-recommended type. The combined type also can be combined at will.

*The above combination types are factory-recommended type. The combined type also can be combined at will.

ARV 7 Series

ARV 7 Series 380~415V-50/60Hz

HP	8	10	12	14	
Model	ARV-H250/SR1MV	ARV-H280/SR1MV	ARV-H330/SR1MV	ARV-H400/SR1MV	
Combination	Cooling kW	25.2	28	33.5	40
	Heating kW	25.2	28.0	33.5	40.0
	Power Supply V~,Hz,Ph	380~415,50/60,3	380~415,50/60,3	380~415,50/60,3	380~415,50/60,3
Electric Data	Cooling Input kW	5.31	6.11	8.48	9.90
	EER W/W	4.75	4.58	3.95	4.04
	Heating Input kW	4.60	5.23	6.38	8.25
	COP W/W	5.48	5.35	5.25	4.85
Performance	Air Flow Volume m ³ /h	12000	12000	12000	14000
	Noise Level dB(A)	≤58	≤58	≤58	≤61
Compressor	Type	DC Inverter	DC Inverter	DC Inverter	DC Inverter
	Quantity	1	1	1	1
Refrigerant type	Type	R410a	R410a	R410a	R410a
	Type	DC motor	DC motor	DC motor	DC motor
Fan Motor	Fan Quantity	1	1	1	2
Connection Ration	%	50~200	50~200	50~200	50~200
Dimension(W×D×H)	Net mm	990×765×1635	990×765×1635	990×765×1635	1340×765×1635
	Packing mm	1030×825×1865	1030×825×1865	1030×825×1865	1395×815×1865
Weight	Net kg	215	215	230	265
	Gross kg	225	225	240	280
	Liquid Side mm	φ12.7	φ12.7	φ12.7	φ15.88
Refrigerant Piping	Gas Side mm	φ22.2	φ22.2	φ22.2	φ28.6
	Max. Length m	1000	1000	1000	1000
	Max. Height m	110/130	110/130	110/130	110/130
Ambient Temp (Cooling/Heating) °C	-15~55/-30~24	-15~55/-30~24	-15~55/-30~24	-15~55/-30~24	-15~55/-30~24
Stuffing Quantity	20/40/40H	Unit	14/28/28	14/28/28	14/28/28
					11/22/22

ARV7 Series 380~415V -50/60Hz

HP	24	26	28	30	
Model	ARV-H680/SR1MV	ARV-H730/SR1MV	ARV-H785/SR1MV	ARV-H850/SR1MV	
Combination	Cooling kW	68.0	73.0	78.5	85.0
	Heating kW	75.0	81.5	87.5	95.0
	Power Supply V~,Hz,Ph	380~415,50/60,3	380~415,50/60,3	380~415,50/60,3	380~415,50/60,3
Electric Data	Cooling Input kW	18.52	20.7	23.55	26.48
	EER W/W	3.67	3.53	3.33	3.21
	Heating Input kW	18.90	20.69	23.90	27.05
	COP W/W	3.97	3.94	3.66	3.51
Performance	Air Flow Volume m ³ /h	29000	29000	29000	30000
	Noise Level dB(A)	≤62	≤62	≤63	≤64
Compressor	Type	DC Inverter	DC Inverter	DC Inverter	DC Inverter
	Quantity	2	2	2	2
Refrigerant type	Type	R410a	R410a	R410a	R410a
	Type	DC motor	DC motor	DC motor	DC motor
Fan Motor	Fan Quantity	2	2	2	2
Connection Ration	%	50~200	50~200	50~200	50~200
Dimension(W×D×H)	Net mm	1850×825×1760	1850×825×1760	1850×825×1760	1850×825×1760
	Packing mm	1925×930×1930	1925×930×1930	1925×930×1930	1925×930×1930
Weight	Net kg	388	388	388	422
	Gross kg	411	411	411	445
	Liquid Side mm	φ19.05	φ19.05	φ22.2	φ22.2
Refrigerant Piping	Gas Side mm	φ35.0	φ35.0	φ35.0	φ35.0
	Max. Length m	1000	1000	1000	1000
	Max. Height m	110/130	110/130	110/130	110/130
Ambient Temp (Cooling/Heating) °C	-15~55/-30~24	-15~55/-30~24	-15~55/-30~24	-15~55/-30~24	-15~55/-30~24
Stuffing Quantity	20/40/40H	Unit	6/12/12	6/12/12	6/12/12

ARV7 Series 380~415V -50/60Hz

HP	16	18	20	22	
Model	ARV-H450/SR1MV	ARV-H500/SR1MV	ARV-H560/SR1MV	ARV-H610/SR1MV	
Combination	Cooling kW	45	50.4	56	61.5
	Heating kW	45.0	50.4	56.0	61.5
	Power Supply V~,Hz,Ph	380~415,50/60,3	380~415,50/60,3	380~415,50/60,3	380~415,50/60,3
Electric Data	Cooling Input kW	11.82	12.63	15.34	18.90
	EER W/W	3.81	3.99	3.65	3.25
	Heating Input kW	9.78	11.69	13.83	15.44
	COP W/W	4.60	4.31	4.05	3.98
Performance	Air Flow Volume m ³ /h	14000	16000	16000	16000
	Noise Level dB(A)	≤61	≤63	≤63	≤63
Compressor	Type	DC Inverter	DC Inverter	DC Inverter	DC Inverter
	Quantity	1	2	2	2
Refrigerant type	Type	R410a	R410a	R410a	R410a
	Type	DC motor	DC motor	DC motor	DC motor
Fan Motor	Fan Quantity	2	2	2	2
Connection Ration	%	50~200	50~200	50~200	50~200
Dimension(W×D×H)	Net mm	1340×765×1635	1340×765×1635	1340×765×1635	1340×765×1635
	Packing mm	1395×815×1865	1395×815×1865	1395×815×1865	1395×815×1865
Weight	Net kg	265	330	330	330
	Gross kg	280	345	345	345
	Liquid Side mm	φ15.88	φ15.88	φ15.88	φ15.88
Refrigerant Piping	Gas Side mm	φ28.6	φ28.6	φ28.6	φ28.6
	Max. Length m	1000	1000	1000	1000
	Max. Height m	110/130	110/130	110/130	110/130
Ambient Temp (Cooling/Heating) °C	-15~55/-30~24	-15~55/-30~24	-15~55/-30~24	-15~55/-30~24	-15~55/-30~24
Stuffing Quantity	20/40/40H	Unit	11/22/22	11/22/22	11/22/22

ARV7 Series 380~415V -50/60Hz

HP	32	34	36	
Model	ARV-H900/SR1MV	ARV-H950/SR1MV	ARV-H1010SR1MV	
Combination	Cooling kW	90.0	95.2	101.0
	Heating kW	100.0	106.0	112.0
	Power Supply V~,Hz,Ph	380~415,50/60,3	380~415,50/60,3	380~415,50/60,3
Electric Data	Cooling Input kW	29.42	31.64	33.92
	EER W/W	3.06	3.01	2.98
	Heating Input kW	29.32	31.65	33.84
	COP W/W	3.41	3.35	3.31
Performance	Air Flow Volume m ³ /h	30000	30000	30000
	Noise Level dB(A)	≤64	≤66	≤66
Compressor	Type	DC Inverter	DC Inverter	DC Inverter
	Quantity	2	2	2
Refrigerant type	Type	R410a	R410a	R410a
	Type	DC motor	DC motor	DC motor
Fan Motor	Fan Quantity	2	2	2
Connection Ration	%	50~200	50~200	50~200
Dimension(W×D×H)	Net mm	1850×825×1760	1850×825×1760	1850×825×1760
	Packing mm	1925×930×1930	1925×930×1930	1925×930×1930
Weight	Net kg	422	430	430
	Gross kg	445	453	453
	Liquid Side mm	φ22.2	φ22.2	φ22.2
Refrigerant Piping	Gas Side mm	φ35.0	φ35.0	φ35.0
	Max. Length m	1000	1000	1000
	Max. Height m	110/130	110/130	110/130
Ambient Temp (Cooling/Heating) °C	-15~55/-30~24	-15~55/-30~24	-15~55/-30~24	-15~5

ARV 7 Series 380~415V-50/60Hz

HP	38	40	42	44	46		
Model	ARV-H1080/SR1MV	ARV-H1130/SR1MV	ARV-H1180/SR1MV	ARV-H1234/SR1MV	ARV-H1290/SR1MV		
Combination	kW	14+24	14+26	16+26	18+26	20+26	
Capacity	Cooling	kW	108	113	118	123.4	129.0
	Heating	kW	115	121.5	126.5	131.9	137.5
	Power Supply	V~,Hz,Ph	380~415,50/60,3	380~415,50/60,3	380~415,50/60,3	380~415,50/60,3	380~415,50/60,3
Electric Data	Cooling Input	kW	28.42	30.6	32.52	33.33	36.04
	EER	W/W	3.80	3.69	3.63	3.70	3.58
	Heating Input	kW	27.15	28.94	30.47	32.38	34.52
	COP	W/W	4.24	4.20	4.15	4.07	3.98
Performance	Air Flow Volume	m ³ /h	14000+29000	14000+29000	14000+29000	16000+29000	16000+29000
	Sound Pressure level	dB(A)	≤62	≤62	≤62	≤63	≤63
Compressor	Type		DC Inverter				
	Quantity		3	3	3	4	4
Fan Motor	Type		DC motor				
	Fan Quantity		4	4	4	4	4
Max.No.of Indoor Units	unit		64	64	64	64	64
Connection Ration	%	50~200	50~200	50~200	50~200	50~200	50~200
Dimension(W×D×H)	Net	mm	1340×765×1635 1850×825×1760	1340×765×1635 1850×825×1760	1340×765×1635 1850×825×1760	1340×765×1635 1850×825×1760	1340×765×1635 1850×825×1760
	Packing	mm	1395×815×1865 1925×930×1930	1395×815×1865 1925×930×1930	1395×815×1865 1925×930×1930	1395×815×1865 1925×930×1930	1395×815×1865 1925×930×1930
Weight	Net	kg	265+388	265+388	265+388	330+388	330+388
	Gross	kg	280+411	280+411	280+411	345+411	345+411
Refrigerant Piping	Max. Length	m	1000	1000	1000	1000	1000
	Max. Height	m	110/130	110/130	110/130	110/130	110/130
Ambient Temp (Cooling/Heating)	°C	-15~55/-30~24	-15~55/-30~24	-15~55/-30~24	-15~55/-30~24	-15~55/-30~24	-15~55/-30~24

ARV7 Series 380~415V -50/60Hz

HP	56	58	60	62		
Model	ARV-H1570/SR1MV	ARV-H1620/SR1MV	ARV-H1690/SR1MV	ARV-H1740/SR1MV		
Combination	kW	20+36	22+36	24+36	26+36	
Capacity	Cooling	kW	157.0	162.5	169.0	174.0
	Heating	kW	168.0	173.5	187	193.5
	Power Supply	V~,Hz,Ph	380~415,50/60,3	380~415,50/60,3	380~415,50/60,3	380~415,50/60,3
Electric Data	Cooling Input	kW	49.26	52.82	52.44	54.62
	EER	W/W	3.19	3.08	3.22	3.19
	Heating Input	kW	47.67	49.28	52.74	54.53
	COP	W/W	3.52	3.52	3.55	3.55
Performance	Air Flow Volume	m ³ /h	16000+30000	16000+30000	29000+30000	29000+30000
	Sound Pressure level	dB(A)	≤66	≤66	≤66	≤66
Compressor	Type		DC Inverter	DC Inverter	DC Inverter	DC Inverter
	Quantity		4	4	4	4
Fan Motor	Type		DC motor	DC motor	DC motor	DC motor
	Fan Quantity		4	4	4	4
Max.No.of Indoor Units	unit		64	64	64	64
Connection Ration	%	50~200	50~200	50~200	50~200	50~200
Dimension(W×D×H)	Net	mm	"1340×765×1635 1850×825×1760"	"1340×765×1635 1850×825×1760"	"1340×765×1635 1850×825×1760"	"1340×765×1635 1850×825×1760"
	Packing	mm	"1395×815×1865 1925×930×1930"	"1395×815×1865 1925×930×1930"	"1395×815×1865 1925×930×1930"	"1395×815×1865 1925×930×1930"
Weight	Net	kg	330+430	330+430	388+430	388+430
	Gross	kg	345+453	345+453	411+453	411+453
Refrigerant Piping	Max. Length	m	1000	1000	1000	1000
	Max. Height	m	110/130	110/130	110/130	110/130
Ambient Temp (Cooling/Heating)	°C	-15~55/-30~24	-15~55/-30~24	-15~55/-30~24	-15~55/-30~24	-15~55/-30~24

ARV 7 Series 380~415V-50/60Hz

HP	48	50	52	54		
Model	ARV-H1345/SR1MV	ARV-H1410/SR1MV	ARV-H1460/SR1MV	ARV-H1514/SR1MV		
Combination	kW	22+26	24+26	26×2	18+36	
Capacity	Cooling	kW	134.5	141.0	146.0	151.4
	Heating	kW	143.0	156.5	163.0	162.4
	Power Supply	V~,Hz,Ph	380~415,50/60,3	380~415,50/60,3	380~415,50/60,3	380~415,50/60,3
Electric Data	Cooling Input	kW	39.6	39.22	41.4	46.55
	EER	W/W	3.40	3.60	3.53	3.25
	Heating Input	kW	36.13	39.59	41.38	45.53
	COP	W/W	3.96	3.95	3.94	3.57
Performance	Air Flow Volume	m ³ /h	16000+29000	29000×2	29000×2	16000+30000
	Sound Pressure level	dB(A)	≤63	≤62	≤62	≤66
Compressor	Type		DC Inverter	DC Inverter	DC Inverter	DC Inverter
	Quantity		4	4	4	4
Fan Motor	Type		DC motor	DC motor	DC motor	DC motor
	Fan Quantity		4	4	4	4
Max.No.of Indoor Units	unit		64	64	64	64
Connection Ration	%	50~200	50~200	50~200	50~200	50~200
Dimension(W×D×H)	Net	mm	"1340×765×1635 1850×825×1760"×2	(1850×825×1760)×2	(1850×825×1760)×2	"1340×765×1635 1850×825×1760"×2
	Packing	mm	"1395×815×1865 1925×930×1930"×2	(1925×930×1930)×2	(1925×930×1930)×2	"1395×815×1865 1925×930×1930"×2
Weight	Net	kg	330+388	388×2	388×2	330+430
	Gross	kg	345+411	411×2	411×2	345+453
Refrigerant Piping	Max. Length	m	1000	1000	1000	1000
	Max. Height	m	110/130	110/130	110/130	110/130
Ambient Temp (Cooling/Heating)	°C	-15~55/-30~24	-15~55/-30~24	-15~55/-30~24	-15~55/-30~24	-15~55/-30~24

HP	64	66	68	70		
Model	ARV-H1795/SR1MV	ARV-H1860/SR1MV	ARV-H1910/SR1MV	ARV-H1962/SR1MV		
Combination	kW	28+36	30+36	32+36	34+36	
Capacity	Cooling	kW	179.5	186.0	191.0	196.2
	Heating	kW	199.5	207.0	212.0	218.0
	Power Supply	V~,Hz,Ph	380~415,50/60,3	380~415,50/60,3	380~415,50/60,3	380~415,50/60,3
Electric Data	Cooling Input	kW	57.47	60.4	63.34	65.56
	EER	W/W	3.12	3.08	3.02	2.99
	Heating Input	kW	57.74	60.89	63.16	65.49
	COP	W/W	3.46			

ARV 7 Series 380~415V-50/60Hz

HP	72	74	76	78		
Model	ARV-H2020/SR1MV	ARV-H2090/SR1MV	ARV-H2140/SR1MV	ARV-H2190/SR1MV		
Combination	kW	36x2	14+24+36	14+26+36	16+26+36	
Capacity	Cooling	kW	202.0	209.0	214.0	219.0
	Heating	kW	224.0	227.0	233.5	238.5
	Power Supply	V~,Hz,Ph	380~415,50/60,3	380~415,50/60,3	380~415,50/60,3	380~415,50/60,3
	Cooling Input	kW	67.84	62.34	64.52	66.44
Electric Data	EER	W/W	2.98	3.35	3.32	3.30
	Heating Input	kW	67.68	60.99	62.78	64.31
	COP	W/W	3.31	3.72	3.72	3.71
	Air Flow Volume	m³/h	3000x2	14000+29000+30000	14000+29000+30000	14000+29000+30000
Performance	Sound Pressure level	dB(A)	≤66	≤66	≤66	≤66
Compressor	Type		DC Inverter	DC Inverter	DC Inverter	DC Inverter
	Quantity		4	5	5	5
Fan Motor	Type		DC motor	DC motor	DC motor	DC motor
	Fan Quantity		4	6	6	6
Max.No.of Indoor Units	unit		64	64	64	64
Connection Ration	%		50~200	50~200	50~200	50~200
Dimension(W×D×H)	Net	mm	(1850×825×1760)×2	"1340×765×1635 (1850×825×1760)×2"	"1340×765×1635 (1850×825×1760)×2"	"1340×765×1635 (1850×825×1760)×2"
	Packing	mm	(1925×930×1930)×2	"1395×815×1865 (1925×930×1930)×2"	"1395×815×1865 (1925×930×1930)×2"	"1395×815×1865 (1925×930×1930)×2"
Weight	Net	kg	430x2	265+388+430	265+388+430	265+388+430
	Gross	kg	543x2	280+411+453	280+411+453	280+411+453
Refrigerant Piping	Max. Length	m	1000	1000	1000	1000
	Max. Height	m	110/130	110/130	110/130	110/130
Ambient Temp (Cooling/Heating)	°C	-15~55~-30~24	-15~55~-30~24	-15~55~-30~24	-15~55~-30~24	-15~55~-30~24

ARV7 Series 380~415V -50/60Hz

HP	90	92	94	96	98			
Model	ARV-H2524/SR1MV	ARV-H2580/SR1MV	ARV-H2635/SR1MV	ARV-H2700/SR1MV	ARV-H2750/SR1MV			
Combination	kW	18+36x2	20+36x2	22+36x2	24+36x2	26+36x2		
Capacity	Cooling	kW	252.4	258.0	263.5	270.0	275.0	
	Heating	kW	274.4	280.0	285.5	299.0	305.5	
	Power Supply	V~,Hz,Ph	380~415,50/60,3	380~415,50/60,3	380~415,50/60,3	380~415,50/60,3	380~415,50/60,3	
	Cooling Input	kW	80.47	83.18	86.74	86.36	88.54	
Electric Data	EER	W/W	3.14	3.10	3.04	3.13	3.11	
	Heating Input	kW	79.47	81.61	83.22	86.68	88.47	
	COP	W/W	3.45	3.43	3.43	3.45	3.45	
	Air Flow Volume	m³/h	16000+30000x2	16000+30000x2	16000+30000x2	29000+30000x2	29000+30000x2	
Performance	Sound Pressure level	dB(A)	≤66	≤66	≤66	≤66	≤66	
Compressor	Type		DC Inverter	DC Inverter	DC Inverter	DC Inverter	DC Inverter	
	Quantity		6	6	6	6	6	
Fan Motor	Type		DC motor	DC motor	DC motor	DC motor	DC motor	
	Fan Quantity		6	6	6	6	6	
Max.No.of Indoor Units	unit		64	64	64	64	64	
Connection Ration	%		50~200	50~200	50~200	50~200	50~200	
Dimension(W×D×H)	Net	mm	"1340×765×1635 (1850×825×1760)×2"	"1340×765×1635 (1850×825×1760)×2"	"1340×765×1635 (1850×825×1760)×2"	"1340×765×1635 (1850×825×1760)×2"	"1340×765×1635 (1850×825×1760)×3	"1340×765×1635 (1850×825×1760)×3
	Packing	mm	"1395×815×1865 (1925×930×1930)×2"	"1395×815×1865 (1925×930×1930)×2"	"1395×815×1865 (1925×930×1930)×2"	"1395×815×1865 (1925×930×1930)×2"	"1395×815×1865 (1925×930×1930)×3	"1395×815×1865 (1925×930×1930)×3
Weight	Net	kg	330+430x2	330+430x2	330+430x2	330+430x2	388+430x2	388+430x2
	Gross	kg	345+411+453	345+411+453	345+411+453	345+411+453	411+453x2	411+453x2
Refrigerant Piping	Max. Length	m	1000	1000	1000	1000	1000	1000
	Max. Height	m	110/130	110/130	110/130	110/130	110/130	110/130
Ambient Temp (Cooling/Heating)	°C	-15~55~-30~24	-15~55~-30~24	-15~55~-30~24	-15~55~-30~24	-15~55~-30~24	-15~55~-30~24	-15~55~-30~24

ARV 7 Series 380~415V-50/60Hz

HP	80	82	84	86	88		
Model	ARV-H2240/SR1MV	ARV-H2300/SR1MV	ARV-H2355/SR1MV	ARV-H2420/SR1MV	ARV-H2470/SR1MV		
Combination	kW	18+26+36	20+26+36	22+26+36	24+26+36	26+26+36	
Capacity	Cooling	kW	224.4	230.0	235.5	242.0	247.0
	Heating	kW	243.9	249.5	255.0	268.5	275
	Power Supply	V~,Hz,Ph	380~415,50/60,3	380~415,50/60,3	380~415,50/60,3	380~415,50/60,3	380~415,50/60,3
	Cooling Input	kW	67.25	69.96	73.52	73.14	75.32
Electric Data	EER	W/W	3.34	3.29	3.20	3.31	3.28
	Heating Input	kW	66.22	68.36	69.97	73.43	75.22
	COP	W/W	3.68	3.65	3.64	3.66	3.66
	Air Flow Volume	m³/h	16000+29000+30000	16000+29000+30000	16000+29000+30000	29000x2+30000	29000x2+30000
Performance	Sound Pressure level	dB(A)	≤66	≤66	≤66	≤66	≤66
Compressor	Type		DC Inverter	DC Inverter	DC Inverter	DC Inverter	DC Inverter
	Quantity		6	6	6	6	6
Fan Motor	Type		DC motor	DC motor	DC motor	DC motor	DC motor
	Fan Quantity		6	6	6	6	6
Max.No.of Indoor Units	unit		64	64	64	64	64
Connection Ration	%		50~200	50~200	50~200	50~200	50~200
Dimension(W×D×H)	Net	mm	"1340×765×1635 (1850×825×1760)×2"	"1340×765×1635 (1850×825×1760)×2"	"1340×765×1635 (1850×825×1760)×2"	"1340×765×1635 (1850×825×1760)×3	"1340×765×1635 (1850×825×1760)×3
	Packing	mm	"1395×815×1865 (1925×930×1930)×2"	"1395×815×1865 (1925×930×1930)×2"	"1395×815×1865 (1925×930×1930)×2"	"1395×815×1865 (1925×930×1930)×3	"1395×815×1865 (1925×930×1930)×3
Weight	Net	kg	330+388+430	330+388+430	330+388+430	388x2+430	388x2+430
	Gross	kg	345+411+453	345+411+453	345+411+453	411x2+453	411x2+453
Refrigerant Piping	Max. Length	m	1000	1000	1000	1000	1000
	Max. Height	m	110/130	110/130	110/130	110/130	110/130
Ambient Temp (Cooling/Heating)	°C	-15~55~-30~24	-15~55~-30~24	-15~55~-30~24	-15~55~-30~24	-15~55~-30~24	-15~55~-30~24

HP	100	102	104	106	108
Model	ARV-H2805/SR1MV	ARV-H2870/SR1MV	ARV-H2920/SR1MV	ARV-H2972/SR1MV	ARV-H3030/SR1MV

<tbl_r cells="6" ix="1" maxcspan="1

ARV 7 Series 380~415V-50/60Hz

HP	110	112	114	116	118
Model	ARV-H3090/SR1MV	ARV-H3145/SR1MV	ARV-H3210/SR1MV	ARV-H3260/SR1MV	ARV-H3315/SR1MV
Combination	kW	26×3+32	26×2+28+32	26×2+30+32	26×2+32×2
Capacity	Cooling	kW	309.0	314.5	321.0
	Heating	kW	344.5	350.5	358.0
	Power Supply	V~,Hz,Ph	380~415,50/60,3	380~415,50/60,3	380~415,50/60,3
Electric Data	Cooling Input	kW	91.52	94.37	97.30
	EER	W/W	3.38	3.33	3.30
	Heating Input	kW	91.39	94.60	97.75
	COP	W/W	3.77	3.71	3.66
Performance	Air Flow Volume	m ³ /h	29000×3+30000	29000×3+30000	29000×2+30000×2
	Sound Pressure level	dB(A)	≤64	≤64	≤64
Compressor	Type		DC Inverter	DC Inverter	DC Inverter
	Quantity		8	8	8
Fan Motor	Type		DC motor	DC motor	DC motor
	Fan Quantity		8	8	8
Max.No.of Indoor Units		unit	64	64	64
Connection Ration		%	50~200	50~200	50~200
Dimension(W×D×H)	Net	mm	(1850×825×1760)×4	(1850×825×1760)×4	(1850×825×1760)×4
	Packing	mm	(1925×930×1930)×4	(1925×930×1930)×4	(1925×930×1930)×4
Weight	Net	kg	388×3+422	388×3+422	388×2+422×2
	Gross	kg	411×3+445	411×3+445	411×2+445×2
Refrigerant Piping	Max. Length	m	1000	1000	1000
	Max. Height	m	110/130	110/130	110/130
Ambient Temp (Cooling/Heating)	°C		-15~55~-30~24	-15~55~-30~24	-15~55~-30~24

ARV7 Series 380~415V -50/60Hz

HP	130	132	134	136
Model	ARV-H3645SR1MV	ARV-H3710/SR1MV	ARV-H3760/SR1MV	ARV-H3815/SR1MV
Combination	kW	22+36×3	24+36×3	26+36×3
Capacity	Cooling	kW	364.5	371.0
	Heating	kW	397.5	411.0
	Power Supply	V~,Hz,Ph	380~415,50/60,3	380~415,50/60,3
Electric Data	Cooling Input	kW	120.66	120.28
	EER	W/W	3.02	3.08
	Heating Input	kW	117.06	120.52
	COP	W/W	3.40	3.41
Performance	Air Flow Volume	m ³ /h	16000+30000×3	29000+30000×3
	Sound Pressure level	dB(A)	≤66	≤66
Compressor	Type		DC Inverter	DC Inverter
	Quantity		8	8
Fan Motor	Type		DC motor	DC motor
	Fan Quantity		8	8
Max.No.of Indoor Units		unit	64	64
Connection Ration		%	50~200	50~200
Dimension(W×D×H)	Net	mm	"1340×765×1635 (1850×825×1760)×3"	(1850×825×1760)×4
	Packing	mm	"1395×815×1865 (1925×930×1930)×3"	(1925×930×1930)×4
Weight	Net	kg	330+430×3	388+430×3
	Gross	kg	345+453×3	411+453×3
Refrigerant Piping	Max. Length	m	1000	1000
	Max. Height	m	110/130	110/130
Ambient Temp (Cooling/Heating)	°C		-15~55~-30~24	-15~55~-30~24

ARV 7 Series 380~415V-50/60Hz

HP	120	122	124	126	128
Model	ARV-H3380/SR1MV	ARV-H3430/SR1MV	ARV-H3485/SR1MV	ARV-H3550/SR1MV	ARV-H3600/SR1MV
Combination	kW	26+30+32×2	26+32×3	28+32×3	30+32×3
Capacity	Cooling	kW	338.0	343.0	348.5
	Heating	kW	376.5	381.5	387.5
	Power Supply	V~,Hz,Ph	380~415,50/60,3	380~415,50/60,3	380~415,50/60,3
Electric Data	Cooling Input	kW	106.02	108.96	111.81
	EER	W/W	3.19	3.15	3.12
	Heating Input	kW	106.38	108.65	111.86
	COP	W/W	3.54	3.51	3.46
Performance	Air Flow Volume	m ³ /h	29000+30000×3	29000+30000×3	29000+30000×3
	Sound Pressure level	dB(A)	≤64	≤64	≤64
Compressor	Type		DC Inverter	DC Inverter	DC Inverter
	Quantity		8	8	8
Fan Motor	Type		DC motor	DC motor	DC motor
	Fan Quantity		8	8	8
Max.No.of Indoor Units		unit	64	64	64
Connection Ration		%	50~200	50~200	50~200
Dimension(W×D×H)	Net	mm	(1850×825×1760)×4	(1850×825×1760)×4	(1850×825×1760)×4
	Packing	mm	(1925×930×1930)×4	(1925×930×1930)×4	(1925×930×1930)×4
Weight	Net	kg	388+422×3	388+422×3	388+422×3
	Gross	kg	411+445×3	411+445×3	411+445×3
Refrigerant Piping	Max. Length	m	1000	1000	1000
	Max. Height	m	110/130	110/130	110/130
Ambient Temp (Cooling/Heating)	°C		-15~55~-30~24	-15~55~-30~24	-15~55~-30~24

ARV7 Series 380~415V -50/60Hz

HP	138	140	142	144
Model	ARV-H3880/SR1MV	ARV-H3930/SR1MV	ARV-H3982/SR1MV	ARV-H4040/SR1MV
Combination	kW	30+36×3	32+36×3	34+36×3
Capacity	Cooling	kW	388.0	393.0
	Heating	kW	431.0	436.0
	Power Supply	V~,Hz,Ph	380~415,50/60,3	380~415,50/60,3
Electric Data	Cooling Input	kW	128.24	131.18
	EER	W/W	3.03	3.00
	Heating Input	kW	128.67	130.94
	COP	W/W	3.35	3.33
Performance	Air Flow Volume	m ³ /h	30000×4	30000×4
	Sound Pressure level	dB(A)	≤66	≤66
Compressor	Type		DC Inverter	DC Inverter
	Quantity		8	8
Fan Motor	Type		DC motor	DC motor
	Fan Quantity		8	8
Max.No.of Indoor Units		unit	64	64
Connection Ration		%	50~200	50~200
Dimension(W×D×H)	Net	mm	(1850×825×1760)×4	(1850×825×1760)×4
	Packing	mm	(1925×930×1930)×4	(1925×930×1930)×4
Weight	Net	kg	422+430×3	422+430×3
	Gross	kg	445+453×3	445+453×3
Refrigerant Piping	Max. Length	m	1000	1000
	Max. Height	m	110/130	110/130
Ambient Temp (Cooling/Heating)	°C		-15~55~-30~24	-15~55~-30~24

Notes:

- 1.Cooling Capacity: Indoor temperature 27°C DB/19°C WB; Outdoor temperature:35°C DB/ 24°C WB.
- 2.Heating Capacity: Indoor temperature 20°C DB; Outdoor temperature: 7°C DB/ 6°C WB.
- 3.Piping Length: Equivalent piping length: 7.5m, level difference: 0m.
- 4.We can guarantee the operation only within 130% Combination. If you want to connect more than 130% combination, please contact us and discuss the requirement.
- 5.Anechoic chamber conversion value, measured in test room. During actual operation.These values are normally somewhat higher as a result of ambient conditions.
- 6.The above designs and specifications are subject to change without prior notice. Final specifications please refer to technical specification provided by sales representative.
- 7.Sound values are measured in a semi-anechoic room, at a position 1m in front of the unit and 1.3m above the floor.
- 8.The above combined types are factory-recommended type. The combined type also can be combined at will.

Remarks:

- 1.Data from AUX lab, Data may change according to test surroundings, AUX reserves right of explanation on data.
- 2.All specifications are subject to change by the manufacturer without prior notice

Notes:

- 1.Cooling Capacity: Indoor temperature 27°C DB/19°C WB; Outdoor temperature:35°C DB/ 24°C WB.
- 2.Heating Capacity: Indoor temperature 20°C DB; Outdoor temperature: 7°C DB/ 6°C WB.
- 3.Piping Length: Equivalent piping length: 7.5m, level difference: 0m.
- 4.We can guarantee the operation only within 130% Combination. If you want to connect more than 130% combination, please contact us and discuss the requirement.
- 5



ARV Mini Series -All DC Inverter



Feature

► DC Inverter Compressor

Made of rare earth permanent magnetic material, the rotor could change the motor's round speed by changing the DC voltage motor, thus overcome the electromagnetic noise and rotor loss of AC inverter compressor, then achieves high efficiency as well as low noise.


► Diversification of installation

A various of indoor units can be connected together, multi indoor units can be freely combined together in one systems . So Mini VRF is the best choose for some place which had multi rooms.



► Wide Voltage Design

In country with unstable voltage, ARV can also run stably.

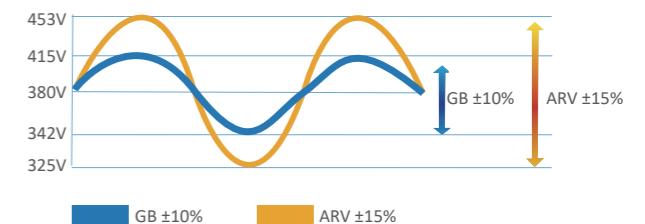

* Data Source: December 2024 AUX Performance Lab.


► 26°C economic locking

All indoor units will run as energy saving mode state.



► Auto Restart Function



The AC can automatically memorize the operation setting when power is cut off accidentally. It can return to previous setting when power resumes.

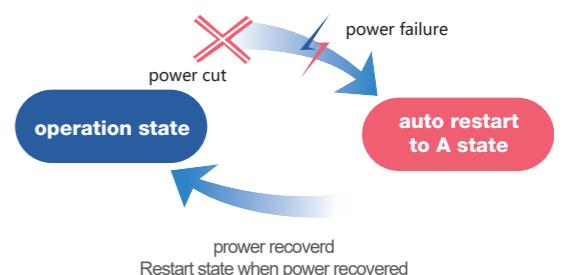

* Data source: June 2023 Experimental validation by AUX Reliability Laboratory.

► Intelligent Defrosting

Intelligent defrosting technique extend the heating operation and decrease the frequency of defrosting. Result in stable room temperature, offer comfort life.

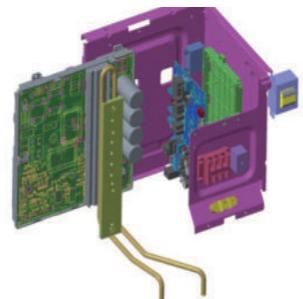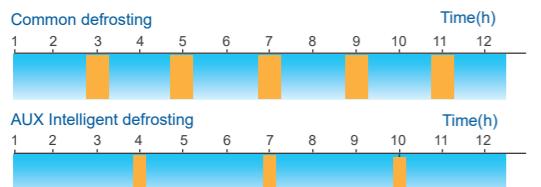


► NEW type Intergrated PCB design(2→1)

The main control, drive and filter boards are all centralized in one control board, making maintenance more convenient.



► Silent mode

About 3 dB reduce than normal mode , Little influence with your neighbors.

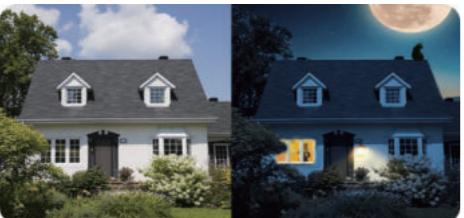

* Data Source: May 23, 2024 AUX Noise Lab Experiments.

► Fast Warm Up And Cool Down

The DC Inverter Compressor system reaches full load rapidly providing less temperature fluctuation and an improved living environment, bringing great user experience.

► Refrigerant PCB Cooling System

The PCB is well cooled by the refrigerant, ensuring the system operate steadily .

ARV Mini Series




ARV MIN 50/60Hz Three-Phase

Model	Cooling	Heating	ARV-H120/SR1DCS1A	ARV-H140/SR1DCS1A	ARV-H160/SR1DCS1A	ARV-H180/SR1DCS7A
Capacity	kW	kW	12.1	14.0	15.5	18
Electric Data	Power Supply	V-,Hz,Ph	380~415,3N~50/60	380~415,3N~50/60	380~415,3N~50/60	380~415,3N~50/60
	Cooling Power Input	kW	3.25	3.80	4.80	5.20
	Heating Power Input	kW	3.45	3.85	4.60	5.00
Performance	Cooling Current	A	5.00	5.80	7.60	8.00
	Heating Current	A	5.30	5.90	7.30	7.70
	EER		3.72	3.68	3.23	3.46
	COP		4.06	4.16	3.91	4.00
Piping Limite	Air Flow Volume	m ³ /h	5100	5100	5100	6700
	Noise Level	dB(A)	56	56	57	58
	Level difference between IDU and ODU	m	50	50	50	50
	Level difference between IDU and IDU	m	15	15	15	15
	Between the first brance and the Farthest IDU	m	40	40	40	40
Connection Ratio	Total Pipe length	m	150	150	150	150
Dimension (WxDxH)	Net	mm	990x420x860	990x420x860	990x420x860	940*340*1320
	Packing	mm	1100x545x980	1100x545x980	1100x545x980	1080*430*1440
Weight	Net	kg	79	79	79	90
	Gross	kg	90	90	90	100
Refrigerant Type			R410A	R410A	R410A	R410A
Pipe Diameter	Liquid Side	mm(inch)	9.52(3/8)	9.52(3/8)	9.52(3/8)	9.52(3/8)
	Gas Side	mm(inch)	15.88(5/8)	15.88(5/8)	15.88(5/8)	19.05(6/8)
Operation Range	Cooling	°C	-15~49	-15~49	-15~49	-15~49
	Heating	°C	-20~24	-20~24	-20~24	-20~24
Stuffing Quantity	20/40/40H	unit	40/84/84	40/84/84	40/84/84	27/55/54

► Accurate Temperature Control

According to change trend of indoor ambient temperature, the unit can use PI algorithm to calculate capacity demand percentage of indoor unit, control operating frequency of compressor in real time and achieve accurate control room temperature.

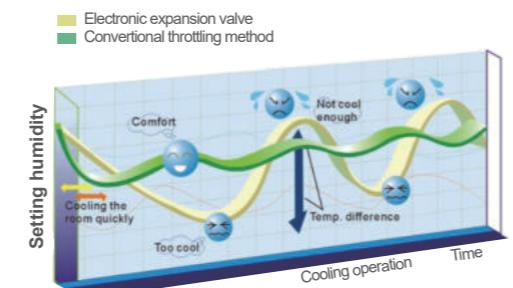

* Data Source:2024.May AUX performance lab erp experiment.

Notes:

- 1.Cooling Capacity: Indoor temperature 27°C DB/ 19°C WB; Outdoor temperature:35°C DB/ 24°C WB.
- 2.Cooling Capacity (Tropical): Indoor temperature 27°C DB/19°C WB; Outdoor temperature:46.1°C DB.
- 3.Heating Capacity: Indoor temperature 20°C DB; Outdoor temperature: 7°C DB/ 6°C WB.
- 4.Piping Length: Equivalent piping length: 7.5m, level difference: 0m.
- 5.Anechoic chamber conversion value, measured in test room. During actual operation. These values are normally somewhat higher as a result of ambient conditions.
- 6.The above designs and specifications are subject to change without prior notice. Final specifications please refer to technical specification provided by sales representative.

Remarks:

- 1.Data from AUX lab, Data may change according to test surroundings, AUX reserves right of explanation on data.
- 2.All specifications are subject to change by the manufacturer without prior notice.

ARV Mini Series



ARV MINI 50/60Hz Single-Phase

Model	Outdoor	ARV-H80/NR1A	ARV-H100/NR1A	ARV-H120/NR1A	ARV-H140/NR1A
Capacity	Cooling kW	8.0	10.0	12.1	14.0
	Heating kW	9.00	12.00	14.00	16.00
	Power Supply V~,Hz,Ph	220~240,50/60,1	220~240,50/60,1	220~240,50/60,1	220~240,50/60,1
Electric Data	Cooling Power Input kW	2.00	2.55	3.20	3.75
	Heating Power Input kW	1.95	2.97	3.45	3.85
	Cooling Current A	9.10	11.60	14.50	17.00
	Heating Current A	8.90	13.50	15.70	17.50
	EER	4.00	3.92	3.78	3.73
	COP	4.62	4.04	4.06	4.16
	SEER	6.00	6.05	6.82	6.85
	SCOP	3.80	3.80	3.75	4.84
Performance	Air Flow Volume m³/h	4100	4100	4890	5100
	Noise Level dB(A)	54	54	56	56
Piping Limite	Level difference between IDU and ODU m	20	20	20	30
	Level difference between IDU and IDU m	8	8	8	8
	Between the first brance and the Farthest IDU m	20	20	20	20
	Total Pipe length m	40	40	40	100
Connection Ratio	%	50~130	50~130	50~130	50~130
Dimension (WxDxH)	Net mm	970×370×800	970×370×800	970×370×800	990×420×860
	Packing mm	1105×495×890	1105×495×890	1105×495×890	1100×545×980
Weight	Net kg	60	60	70	80
	Gross kg	64.5	64.5	75	91
Refrigerant Type		R410a	R410a	R410a	R410a
Pipe Diameter	Liquid Side mm(inch)	9.52(3/8)	9.52(3/8)	9.52(3/8)	9.52(3/8)
	Gas Side mm(inch)	15.88(5/8)	15.88(5/8)	15.88(5/8)	15.88(5/8)
Operation Range	Cooling °C	-15~49	-15~49	-15~49	-15~49
	Heating °C	-15~27	-15~27	-15~27	-15~27
Stuffing Quantity	20/40/40H unit	44/92/138	44/92/138	44/92/138	40/84/84

Model	Outdoor	ARV-H160/NR1A	ARV-H180/NR1A-I	ARV-H200/NR1A-I
Capacity	Cooling kW	15.5	18.0	20.0
	Heating kW	18.00	20.00	22.40
	Power Supply V~,Hz,Ph	220~240,50/60,1	220~240,50/60,1	220~240,50/60,1
Electric Data	Cooling Power Input kW	4.80	5.20	5.90
	Heating Power Input kW	4.60	5.20	6.20
	Cooling Current A	21.80	24.10	27.36
	Heating Current A	20.90	24.10	28.76
	EER	3.23	3.46	3.39
	COP	3.91	3.85	3.61
	SEER	6.80	/	/
	SCOP	4.30	/	/
Performance	Air Flow Volume m³/h	5100	6700	6700
	Noise Level dB(A)	56	57	57
Piping Limite	Level difference between IDU and ODU m	30	50	50
	Level difference between IDU and IDU m	8	15	15
	Between the first brance and the Farthest IDU m	20	40	40
	Total Pipe length m	100	150	150
Connection Ratio	%	50~130	50~130	50~130
Dimension (WxDxH)	Net mm	990×420×860	940×340×1320	940×340×1320
	Packing mm	1100×545×980	1080×430×1440	1080×430×1440
Weight	Net kg	80	90	90
	Gross kg	91	100	100
Refrigerant Type		R410a	R410a	R410a
Pipe Diameter	Liquid Side mm(inch)	9.52(3/8)	9.52(3/8)	9.52(3/8)
	Gas Side mm(inch)	15.88(5/8)	19.05(6/8)	19.05(6/8)
Operation Range	Cooling °C	-15~49	-15~55	-15~55
	Heating °C	-15~27	-20~24	-20~24
Stuffing Quantity	20/40/40H unit	40/84/84	27/55/54	27/55/54

Remarks:

1.Data from AUX lab, Data may change according to test surroundings, AUX reserves right of explanation on data.

2.All specifications are subject to change by the manufacturer without prior notice.


MODULAR ARV MINI

► Large Capacity&Free Combination

3 basic models from 8HP to 12HP.


Maximum combination: 36HP(100.5kW), top level in industry.

Less quantity of system, space saving, easy installation and low cost.

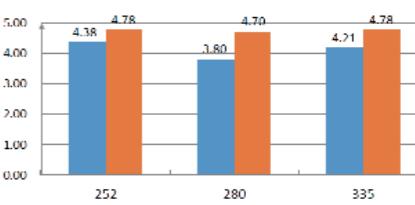


► High EER And COP

MODULAR ARV MINI achieves the industry's top class energy efficiency in cooling and heating by utilizing all DC inverter compressors.

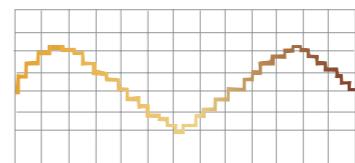

Traditional Control

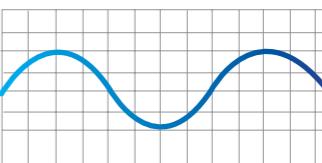

180° Sine Wave DC Control

► 180° Sine Wave Control

DC inverter compressor users 180° sine wave vector control technique makes motor operate smooth and increases the efficiency significantly compared with traditional sawtooth wave. It also can lower the noise level.




Panasonic

► High efficiency DC fan motor

DC brushless motor adjusts the fan speed according to the system pressure, and running load to enhance the efficiency by 45%. The super aero fan provides a larger air volume and higher static pressure.


► Module Alternate Operation

In one combination system, any module could run as the master unit according to the running time. Balance the life of the outdoor units in one system.

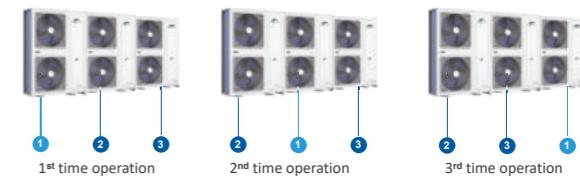

► 2-stage Sub-cooling Technology

Adopting E-pass circuit Reduce resistance and improve heat transfer efficiency.



► Seven-levels of limit electricity usage

The unit has the function of energy saving and power limiting (40% - 100% output power limit). Users can choose the automatic energy saving mode. The system optimizes the output based on changes in ambient temperature, improving the comprehensive operating energy efficiency of the unit.



*Data Source: July 13, 2023 AUX Software Functionality Testing

► Long Piping Length

Max. Total piping length — 560m
Max. piping length between ODU and farthest IDU — 150/175m
Max. piping length from 1st indoor branch to the farthest indoor unit — 40m
Max. Level difference between indoor units — 30m
Max. Level difference between ODU and IDU units — 40m/50m

*Data Source: theoretical calculation




► Non-Polar Communication

Non-polar communication between IDUs, easy installation and commissioning.



► 12 levels silent modes

"6-levels night silent modes.
6-levels daytime silent modes".

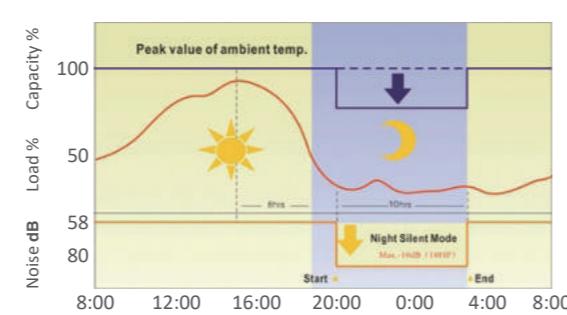

*Data Source: July 13, 2023 AUX Software Functionality Testing.

ARV Mini Series

Moduler MINI ARV 50/60Hz Three-Phase(DC)

Model	Outdoor	ARV-H224/SR1DCMA	ARV-H252/SR1DCMA
Capacity	Cooling kW Heating kW	22.4 25.0	25.2 27.0
	Power Supply V~,Hz,Ph	380~415,3N~50/60	380~415,3N~50/60
Electric Data	Cooling Power Input kW Heating Power Input kW Cooling Current A Heating Current A EER COP SEER SCOP	5.72 5.65 9.60 9.50 3.92 4.78 /	5.75 5.65 9.70 9.50 4.38 4.78 /
Performance	Air Flow Volume m³/h Noise Level dB(A)	11000 43-57	11000 43-57
	Maximum no. indoor units n		see installation manual
Piping Limite	Max. Length m Max. Height m	560 50	560 50
Connection Ratio	%	50~130	50~130
Dimension (WxDxH)	Net mm Packing mm	1120x400x1540 1270x560x1710	1120x400x1540 1270x560x1710
Weight	Net kg Gross kg	145 155	145 155
Refrigerant Type		R410A	R410A
Pipe Diameter	Liquid Side mm(inch) Gas Side mm(inch)	12.7(1/2) 22.22(7/8)	12.7(1/2) 22.22(7/8)
Operation Range	Cooling °C Heating °C	-15~49 -20~24	-15~49 -20~24
Stuffing Quantity	20/40/40H unit	17/37/37	17/37/37

ARV Mini Series

Moduler MINI ARV 50/60Hz Three-Phase(DC)

Model	Outdoor		ARV-H280/SR1DCMA	ARV-H335/SR1DCMA
Capacity	Cooling kW		28.5	33.5
	Heating kW		31.5	37.50
	Power Supply V~.Hz.Ph		380~415,3N~50/60	380~415,3N~50/60
	Cooling Power Input kW		7.50	7.95
	Heating Power Input kW		6.70	7.85
Electric Data	Cooling Current A		12.60	13.40
	Heating Current A		11.40	13.30
	EER		3.80	4.21
	COP		4.70	4.78
	SEER		/	/
	SCOP		/	/
Performance	Air Flow Volume m ³ /h		11000	15300
	Noise Level dB(A)		43-57	43-58
Maximum no. indoor units	n		see installation manual	
Piping Limite	Max. Length m		560	560
	Max. Height m		50	50
Connection Ratio	%		50~130	50~130
Dimension (WxDxH)	Net mm		1120×400×1540	1120×400×1540
	Packing mm		1270×560×1710	1270×560×1710
Weight	Net kg		145	152
	Gross kg		155	162
Refrigerant Type			R410A	R410A
Pipe Diameter	Liquid Side mm(inch)		12.7(1/2)	12.7(1/2)
	Gas Side mm(inch)		22.22(7/8)	22.22(7/8)
Operation Range	Cooling °C		-15~49	-15~55
	Heating °C		-20~24	-20~24
Stuffing Quantity	20/40/40H unit		17/37/37	17/37/37

Indoor Units



Compact Cassette



Cassette



Cassette Q



Wall-mounted J



Wall-mounted C



Slim Duct



Mid ESP Duct



High ESP Duct



Fresh Air Processing Unit



Ceiling&Floor



COMPACT CASSETTE



Feature

► External control box

External control box, no need to disassemble the unit, convenient maintenance.



► Easy to remove wind blades

Thanks to the external design of the electronic control box, the fan blades can be easily removed after removing the air guide ring, making it easy for after-sales maintenance.




► Fresh Air Intake

Fresh air makes indoor air healthy and comfortable.



► Large air flow

Optimized structure of air guide ring, Insertion depth design of guide ring through simulation technology, Ensure large air flow, improve cooling & heating comfort .

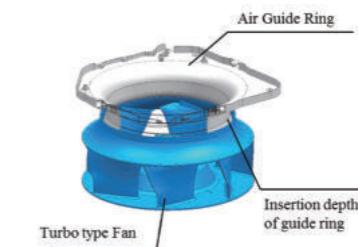

CASSETTE



Feature

► 5-fold exchanger

This evaporator adopts a 5-fold evaporator, which has a larger heat transfer area and improves heat transfer efficiency compared to traditional 4-fold evaporators.



► long distance air supply

The air supply distance reaches 4m, meeting the air supply requirements for tall spaces.

* Data from AUX Performance Lab on May 24, 2024.



* Data from AUX Performance Lab on May 24, 2024.

► Big air volume

Adopting a large-diameter spiral wind wheel for larger air volume and lower noise.



► Sleeping mode

Turn on sleep mode at night, no need to worry about being too cold or too hot, and sleep comfortably all night long



Feature

► Screen display function

When the unit is running, the light panel icon can be set to display or not to display to meet the needs of different customers.



► Fresh air

And long-term use will not cause dizziness, healthy and comfortable




► Auto clean

Automatic cleaning of evaporator, cleaning of dust and dirt, healthy and comfortable



► Built-in Drain Pump

Built in drainage pump with a lift of up to 1200mm, suitable for more installation occasions and more efficient drainage.

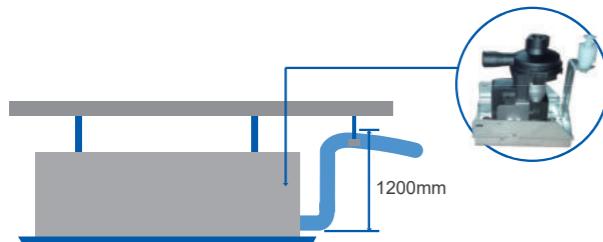

* Data from Sanhua Laboratory on July 20, 2023.

Feature


► Fire-proof cover

The fireproof electric control box made of metal materials has higher safety, ensuring the safe operation of the unit.



► Reliable control board

Hot melt adhesive is applied around the electronic components to keep the components stable.

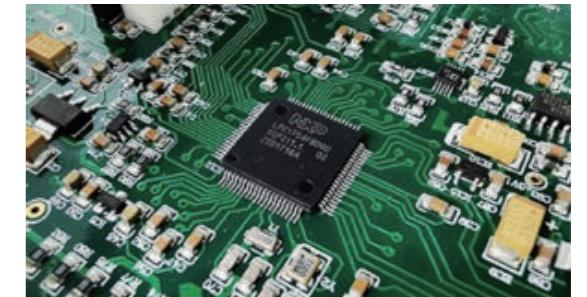

► Anti-leakage water pan

Using 1.5mm thick plastic drain pan, with high waterproof performance and effective prevention of water seepage



► Wifi & Room card

Optional WiFi, room card functions to meet intelligent needs



► Weekly timer

Set the operating time of the unit in one week, without having to manually turn it on every time, and no need to worry about forgetting to turn off the unit after getting off work.



CASSETTE Q



Feature

► Digital display board


Capable of displaying temperature, error codes, and operating status, The controller supports setting the temperature to 0.5°C.



*Controlled by XK10 wired controller only

► Slim body

The depth is 205mm only taking up less installation space on the ceiling.

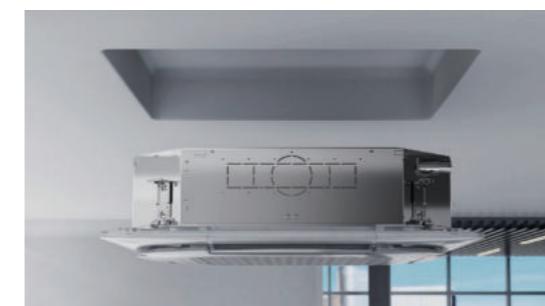

► Wifi function(Optional)

Remotely control the air conditioner to achieve temperature adjustment, mode setting, etc., making life more intelligent and convenient.



► Independent swing air control


Four air blades can be independently controlled to meet personalized air supply needs.



*Controlled by XK10 wired controller only

► Self-cleaning

Self-cleaning technology and high-temperature treatment help reduce surface pollutant on the evaporator,contributing to cleaner and fresher air.

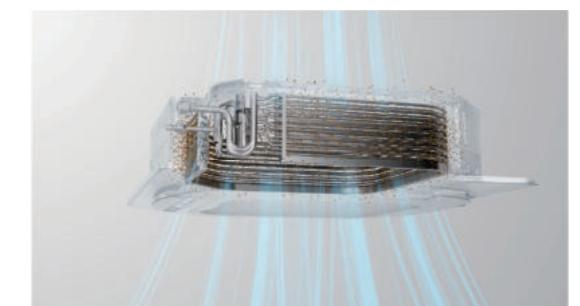

► Easy disassembly

The motor is easy to disassemble, no need to remove the drain pan.



Wall-mounted



Feature

► A Variety Of Panels

A variety of panels can be chosen.

► Wired Control

Remote controller is standard, and wired controller is optional. Wired controller can be fixed on the wall to avoid mislaying. It's mainly used for commercial zone and makes air conditioner control more convenient.



► 2 Ways Draining Connection

Both left and right sides of unit are possible for drainage pipe connection, easy for installation.




► Convenient Installation

EXV is built-in the indoor unit, compact size. Adopts new type fixing plate, stable and easy to install.

► Superb craftsmanship

0.3mm seam, appearance integration.

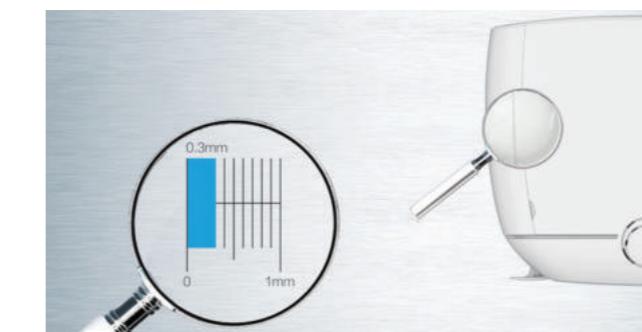


Wall-mounted C



Feature

► Wired Control

Remote controller is standard, and wired controller is optional. Wired controller can be fixed on the wall to avoid mislaying. It's mainly used for commercial zone and makes air conditioner control more convenient.

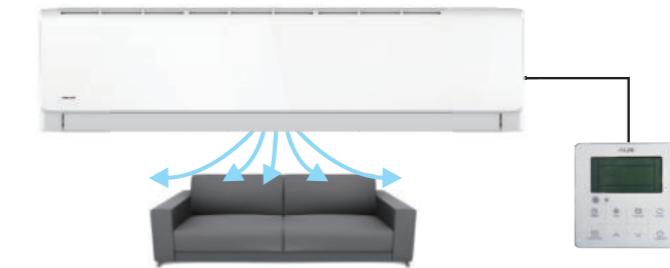

► 2 Ways Draining Connection

Both left and right sides of unit are possible for drainage pipe connection, easy for installation.




► WIFI Function

Intelligent remote control, convenient operation



► Better experience

AUX adopt high density filter, good quality , filtering effect and easy to clean.

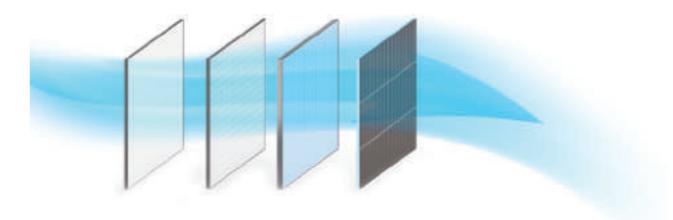

Slim Duct(Q Series)

Feature

► Fresh air inlet

Fresh air inlet design, fresh air can be introduced to ensure fresh air in the room.




► Two return air modes are selected

Two return air modes are selected (back return air and bottom return air), and the bottom plate is removed to change the lower return air.




► Design of hanger position

There is a distance between the hanger and the top cover for easy lifting by hand.

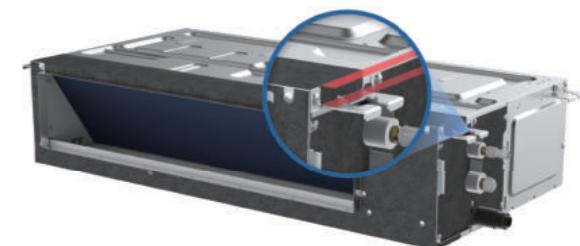

► New structure

Strength analysis through simulation, optimize the structure, improve the strength, not easily deformed during transportation.

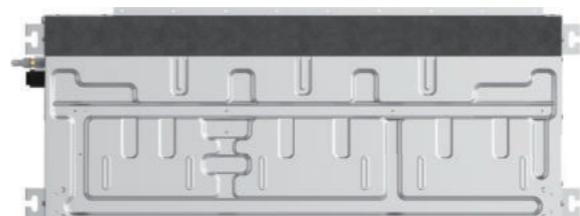

► Electric control box built-in

Built in electronic control box, and the stuffing quantity is greatly increased.



MID ESP DUCT

Feature




► Fresh air inlet

Fresh air inlet design, fresh air can be introduced to ensure fresh air in the room.



► Two return air modes are selected

Two return air modes are selected (back return air and down return air), Easy to change.

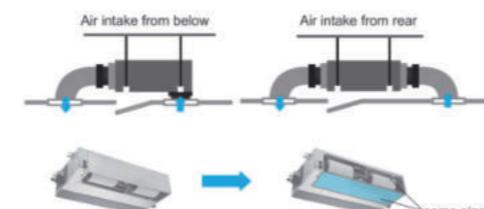

► ESP meet kinds application

(Only DC models support)


Widest ESP range (0-150Pa) with possibility to change ESP by controller and meet different kinds application like apartment, villa...



* Data from AUX Performance Lab on July 1, 2022.

► Electronic control is easy to maintain

Quickly remove 1 screw from the left and right end cover. Change the direction of output line, maintenance without shielding, increase the maintenance space.

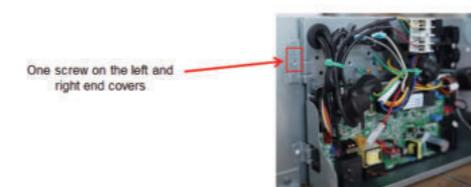

► Silent water pump

Select silent water pump to ensure different customer installation requirements.




* Data from Zhongbao Laboratory on June 2, 2016.

► Constant Air Flow Volume

(only certain model support)

Under different ESP, the product supply Constant air flow volume for comfort.

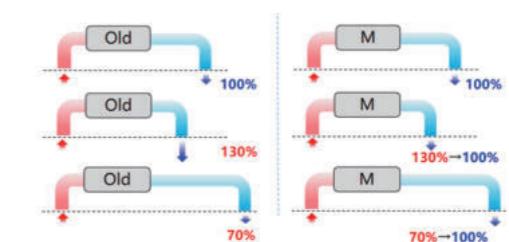


* Data from AUX Performance Lab on July 1, 2022.

► W Type High effeciency filter screen

Easy disassembly (0 Screws)

Convenient to wash

High effeciency (W type)

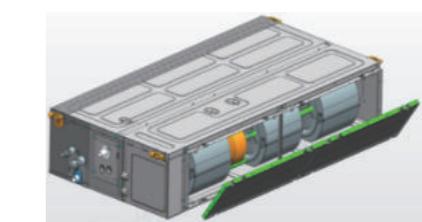

► Double drain holes

Double drainage design on the left and right side of the water plate, flexible to adapt to the installation site.



HIGH ESP DUCT

Feature


► Changeable ESP

Max ESP can up to 250 Pa Wide changeable range (30-250 Pa) , suitable for kinds of application site.

* Data from AUX Performance Lab on April 22, 2020.

► Multiple wind speed options (Only DC models support)

DC fan motor ,7 fan speed meet customer requirement.

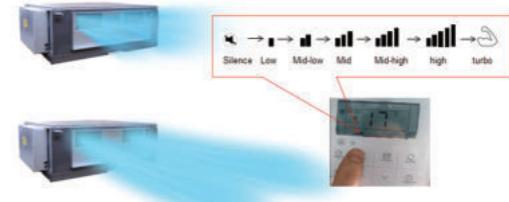


► Double drainage pan

Double drain tray design makes it easier to drain condensate



► Easy to remove air filter

New design (double drainage pan, fan assembly integration), Remove and repair from the bottom, high efficiency.

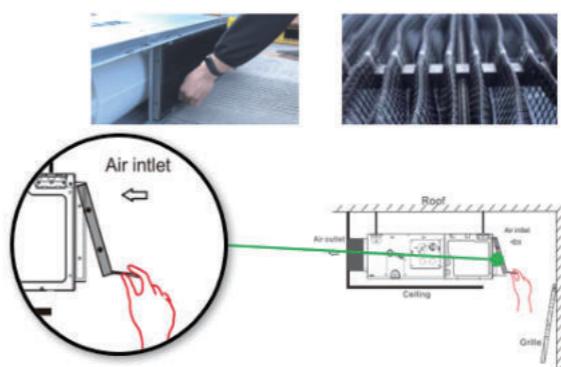


Fresh Air Processor

Feature




► Innovative Air Supply Technology For Excellent Room Temperature Control

Fresh air inlet design, fresh air can be introduced to ensure fresh air in the room.

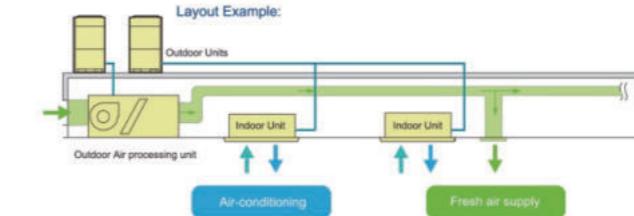

► Long Distance Air Supply


The maximum static pressure of high ESP can reach 250pa.

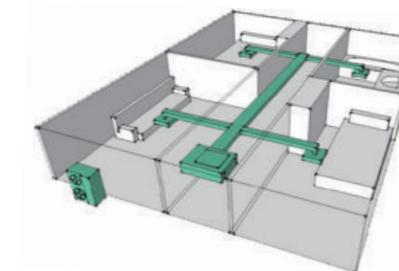

* Data from AUX Performance Lab on April 22, 2020.

► Applicable To A Variety Of Room Types

Specific ESP design can be applied to various room types easily, like rooms of L type or U type; the air outlet can be set separately from the indoor unit, so the air flow can be equally distributed even the room is in irregular structure.

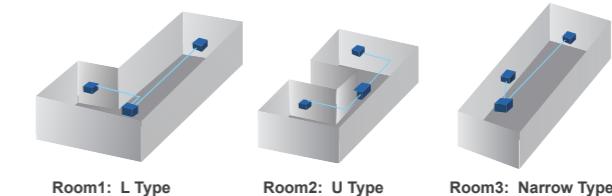

CEILING&FLOOR

Feature



► Long Air Supply Distance

Up to 10 meters, meeting the requirements of large rooms, with a long air supply distance



* Data from November 18, 2019 air supply distance laboratory.

► Anti-condensation

Industry-leading anti-condensation insulation design of the air outlet



► Fresh air intake

Fresh air intake hole design can introduce fresh air to ensure high air quality in the room



► Easy drainage

Left and right water outlet design of water connection plate, flexible for installation site




► Beautiful Design of Display Board

The display board is beautiful built in design, with good sealing, moisture-proof and long reliable life




► Safe and Reliable

Separate design of power and communication terminal to ensure safety

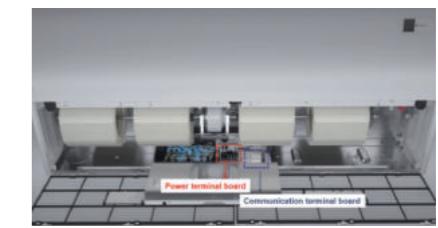


► Optional filter

A variety of health filters can be selected to improve room air quality

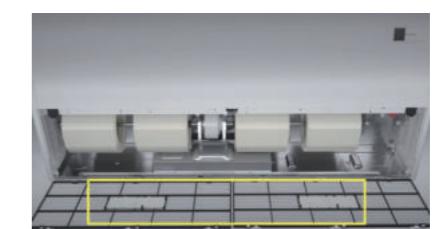

► Easy Maintenance

Enough space to maintenance, no need to take out the whole electrical control box

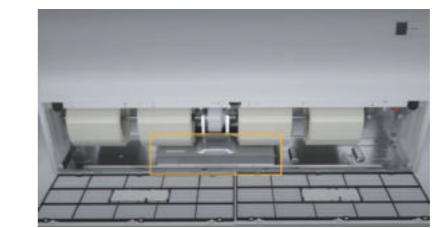

Compact Cassette



Specification-50/60Hz

Model	Indoor		ARVCA-H15/NR1DYBA	ARVCA-H22/NR1DYBA	ARVCA-H28/NR1DYBA	ARVCA-H36/NR1DYBA
Capacity	Cooling	kW	1.5	2.2	2.8	3.6
	Heating	kW	1.8	2.5	3.2	4.0
Electric Data	Power Supply	V~,Hz,Ph	220~240,50(60),1	220~240,50(60),1	220~240,50(60),1	220~240,50(60),1
	Rated Power	W	30	30	30	30
Performance	Air Flow Volume(Tu/Hi/Mid/Low)	m ³ /h	570/530/480/450	570/530/480/450	570/530/480/450	650/620/560/540
	Noise Level(Tu/Hi/Mid/Low)	dB(A)	34/33/32	34/33/32	34/33/32	38/36/35
Dimension (WxDxH)	Net(Body)	mm	570×570×260	570×570×260	570×570×260	570×570×260
	Packing(Body)	mm	720×650×290	720×650×290	720×650×290	720×650×290
	Net(Panel)	mm	650×650×55	650×650×55	650×650×55	650×650×55
	Packing(Panel)	mm	710×710×80	710×710×80	710×710×80	710×710×80
Weight	Net/Gross(Body)	kg	13.5/16.5	13.5/16.5	13.5/16.5	14.5/17.5
	Net/Gross(Panel)	kg	2.2/3.7	2.2/3.7	2.2/3.7	2.2/3.7
Refrigerant Type			R410A	R410A	R410A	R410A
	Liquid Side	mm(inch)	6.35	6.35	6.35	6.35
Pipe Diameter	Gas Side	mm(inch)	9.52	9.52	9.52	12.7
	Drainage	mm(inch)	R3/4in(DN20)	R3/4in(DN20)	R3/4in(DN20)	R3/4in(DN20)
Stuffing Quantity	20/40/40H	unit	216/432/486	216/432/486	216/432/486	216/432/486



Cassette

Specification-50/60Hz

Model	Indoor		ARVCA-H28/NR1DYB	ARVCA-H36/NR1DYB	ARVCA-H45/NR1DYB	ARVCA-H56/NR1DYB	ARVCA-H71/NR1DYB	ARVCA-H80/NR1DYB
Capacity	Cooling	kW	2.8	3.6	4.5	5.6	7.1	8.0
	Heating	kW	3.0	4.3	5.0	6.3	8.5	9.5
Electric Data	Power Supply	V~,Hz,Ph	220~240,50(60),1	220~240,50(60),1	220~240,50(60),1	220~240,50(60),1	220~240,50(60),1	220~240,50(60),1
	Rated Power	W	40	45	50	57	57	57
Performance	Air Flow Volume(Hi/Mid/Low)	m ³ /h	900/800/700	900/800/700	900/800/700	950/850/750	1250/1040/910	1250/1040/910
	Noise Level(Hi/Mid/Low)	dB(A)	35/32/28	35/32/28	35/32/28	35/32/28	38/34/30	38/34/30
Dimension (WxDxH)	Net(Body)	mm	840×840×246	840×840×246	840×840×246	840×840×246	840×840×246	840×840×246
	Packing(Body)	mm	915×915×315	915×915×315	915×915×315	915×915×315	915×915×315	915×915×315
	Net(Panel)	mm	950×950×55	950×950×55	950×950×55	950×950×55	950×950×55	950×950×55
	Packing(Panel)	mm	1000×1000×100	1000×1000×100	1000×1000×100	1000×1000×100	1000×1000×100	1000×1000×100
Weight	Net/Gross(Body)	kg	23.5/27.5	23.5/27.5	23.5/27.5	23.5/27.5	24.5/28.5	24.5/28.5
	Net/Gross(Panel)	kg	5.7/8.3	5.7/8.3	5.7/8.3	5.7/8.3	5.7/8.3	5.7/8.3
Refrigerant Type			R410A	R410A	R410A	R410A	R410A	R410A
	Liquid Side	mm(inch)	6.35	6.35	6.35	6.35	9.52	9.52
Pipe Diameter	Gas Side	mm(inch)	12.7	12.7	12.7	12.7	15.88	15.88
	Drainage	mm(inch)	R3/4in(DN20)	R3/4in(DN20)	R3/4in(DN20)	R3/4in(DN20)	R3/4in(DN20)	R3/4in(DN20)
Stuffing Quantity	20/40/40H	unit	77/164/175	77/164/175	77/164/175	77/164/175	77/164/175	77/164/175

Specification-50/60Hz

Model	Indoor		ARVCA-H45/NR1DYBA	ARVCA-H56/NR1DYBA
Capacity	Cooling	kW	4.5	5.6
	Heating	kW	5.0	6.3
Electric Data	Power Supply	V~,Hz,Ph	220~240,50(60),1	220~240,50(60),1
	Rated Power	W	30	30
Performance	Air Flow Volume(Tu/Hi/Mid/Low)	m ³ /h	760/740/660/600	800/760/680/620
	Noise Level(Tu/Hi/Mid/Low)	dB(A)	44/41/37	45/42/38
Dimension (WxDxH)	Net(Body)	mm	570×570×260	570×570×260
	Packing(Body)	mm	720×650×290	720×650×290
	Net(Panel)	mm	650×650×55	650×650×55
	Packing(Panel)	mm	710×710×80	710×710×80
Weight	Net/Gross(Body)	kg	15.5/18.5	15.5/18.5
	Net/Gross(Panel)	kg	2.2/3.7	2.2/3.7
Refrigerant Type			R410A	R410A
	Liquid Side	mm(inch)	6.35	6.35
Pipe Diameter	Gas Side	mm(inch)	12.7	12.7
	Drainage	mm(inch)	R3/4in(DN20)	R3/4in(DN20)
Stuffing Quantity	20/40/40H	unit	216/432/486	216/432/486

Model	Indoor		ARVCA-H90/NR1DYB	ARVCA-H100/NR1DYB	ARVCA-H112/NR1DYB	ARVCA-H125/NR1DYB	ARVCA-H140/NR1DYAB
Capacity	Cooling	kW	9.0	10.0	11.2	12.5	14.0
	Heating	kW	10.0	11.2	13.0	14.0	15.0
Electric Data	Power Supply	V~,Hz,Ph	220~240,50(60),1	220~240,50(60),1	220~240,50(60),1	220~240,50(60),1	220~240,50(60),1
	Rated Power	W	57	120	120	120	120
Performance	Air Flow Volume(Hi/Mid/Low)	m ³ /h	1250/1040/910	1800/1440/1260	1800/1440/1260	1800/1440/1260	1800/1440/1260
	Noise Level(Hi/Mid/Low)	dB(A)	38/34/30	44/42/40	44/42/40	44/42/40	46/43/41
Dimension (WxDxH)	Net(Body)	mm	840×840×246	840×840×288	840×840×288	840×840×288	840×840×288
	Packing(Body)	mm	915×915×315	915×915×355	915×915×355	915×915×355	915×915×355
	Net(Panel)	mm	950×950×55	950×950×55	950×950×55	950×950×55	950×950×55
	Packing(Panel)	mm	1000×1000×100	1000×1000×100	1000×1000×100	1000×1000×100	1000×1000×100
Weight	Net/Gross(Body)	kg	24.5/28.5	27/31	27/31	27/31	27/31
	Net/Gross(Panel)	kg	5.7/8.3	5.7/8.3	5.7/8.3	5.7/8.3	5.7/8.3
Refrigerant Type			R410A	R410A	R410A	R410A	R410A
	Liquid Side	mm(inch)	9.52	9.52	9.52	9.52	9.52
Pipe Diameter	Gas Side	mm(inch)	15.88	15.88	15.88	15.88	15.88
	Drainage	mm(inch)	R3/4in(DN20)	R3/4in(DN20)	R3/4in(DN20)	R3/4in(DN20)	R3/4in(DN20)
Stuffing Quantity	20/40/40H	unit	77/164/175	77/164/175	77/164/175	77/164/175	77/164/175

Notes:
1.Cooling Capacity: Indoor temperature 27°C DB/19°C WB;Outdoor temperature:35°C DB/24°C WB.
2.Heating Capacity:Indoor temperature 20°C DB;Outdoor temperature:7°C DB/6°C WB.
3.Piping Length:Equivalent piping length: 7.5m,level difference: 0m.
4.Sound level is measured at 1.4m below the unit.
5.The above designs and specifications are subject to change without prior notice. Final specifications please refer to technical specification provided by sales representative.

Remarks:
1.Data from AUX lab, Data may change according to test surroundings, AUX reserves right of explanation on data.
2.All specifications are subject to change by the manufacturer without prior notice.

Notes:
1.Cooling Capacity: Indoor temperature 27°C DB/19°C WB;Outdoor temperature:35

Cassette



Specification-50Hz

Model	Indoor	ARVCA-H28/4R1YB	ARVCA-H36/4R1YB	ARVCA-H45/4R1YB	ARVCA-H56/4R1YB	ARVCA-H71/4R1YB	ARVCA-H80/4R1YB	
Capacity	Cooling	kW	2.8	3.6	4.5	5.6	7.1	8.0
	Heating	kW	3.2	4.3	5.0	6.3	8.0	9.0
Electric Data	Power Supply	V~,Hz,Ph	220~240,50,1	220~240,50,1	220~240,50,1	220~240,50,1	220~240,50,1	220~240,50,1
	Rated Power	W	80	80	80	80	100	100
Performance	Air Flow Volume(Hi/Mid/Low)	m ³ /h	900/850/750	900/850/750	900/850/750	1250/1040/910	1250/1040/910	1250/1040/910
	Noise Level(Hi/Mid/Low)	dB(A)	36/34/33	36/34/33	36/34/33	43/39/37	43/39/37	43/39/37
Dimension (WxDxH)	Net(Body)	mm	840x840x246	840x840x246	840x840x246	840x840x246	840x840x246	840x840x246
	Packing(Body)	mm	915x915x315	915x915x315	915x915x315	915x915x315	915x915x315	915x915x315
	Net(Panel)	mm	950x950x55	950x950x55	950x950x55	950x950x55	950x950x55	950x950x55
	Packing(Panel)	mm	1000x1000x100	1000x1000x100	1000x1000x100	1000x1000x100	1000x1000x100	1000x1000x100
Weight	Net/Gross(Body)	kg	24/28	24/28	24/28	24/28	25/29	25/29
	Net/Gross(Panel)	kg	5.7/8.3	5.7/8.3	5.7/8.3	5.7/8.3	5.7/8.3	5.7/8.3
Refrigerant Type			R410A	R410A	R410A	R410A	R410A	R410A
Pipe Diameter	Liquid Side	mm(inch)	6.35	6.35	6.35	6.35	9.52	9.52
	Gas Side	mm(inch)	12.7	12.7	12.7	12.7	15.88	15.88
	Drainage	mm(inch)	R3/4in(DN20)	R3/4in(DN20)	R3/4in(DN20)	R3/4in(DN20)	R3/4in(DN20)	R3/4in(DN20)
Stuffing Quantity	20/40/40H	unit	77/164/175	77/164/175	77/164/175	77/164/175	77/164/175	77/164/175

Cassette Q



Specification-50/60Hz DC fan motor

Model	Indoor	ARVCA-H28/NR3DQB	ARVCA-H36/NR3DQB	ARVCA-H45/NR3DQB	ARVCA-H56/NR3DQB	ARVCA-H63/NR3DQB	ARVCA-H71/NR3DQB	
Capacity	Cooling	kW	2.8	3.6	4.5	5.6	6.3	7.1
	Heating	kW	3.2	4.3	5.0	6.3	7.1	8.5
Electric Data	Power Supply	V~,Hz,Ph	220~240,50/60Hz,1	220~240,50/60Hz,1	220~240,50/60Hz,1	220~240,50/60Hz,1	220~240,50/60Hz,1	220~240,50/60Hz,1
	Rated Power	W	40	40	40	40	40	40
Performance	Air Flow Volume(Hi/Mid/Low)	m ³ /h	800/630/550	800/630/550	850/680/580	860/680/580	1150/920/800	1150/920/800
	Noise Level(Hi/Mid/Low)	dB(A)	33/31/30	33/31/30	36/34/33	36/34/33	40/38/36	40/38/36
Dimension (WxDxH)	Net(Body)	mm	840*840*205	840*840*205	840*840*205	840*840*205	840*840*205	840*840*205
	Packing(Body)	mm	915*915*270	915*915*270	915*915*270	915*915*270	915*915*270	915*915*270
	Net(Panel)	mm	950x950x53	950x950x53	950x950x53	950x950x53	950x950x53	950x950x53
	Packing(Panel)	mm	1000x1000x100	1000x1000x100	1000x1000x100	1000x1000x100	1000x1000x100	1000x1000x100
Weight	Net/Gross(Body)	kg	18/22	18/22	18/22	18/22	19/23	19/23
	Net/Gross(Panel)	kg	5.3/7.3	5.3/7.3	5.3/7.3	5.3/7.3	5.3/7.3	5.3/7.3
Refrigerant Type			R32/R410A	R32/R410A	R32/R410A	R32/R410A	R32/R410A	R32/R410A
Pipe Diameter	Liquid Side	mm(inch)	6.35	6.35	6.35	6.35	9.52	9.52
	Gas Side	mm(inch)	12.7	12.7	12.7	12.7	15.88	15.88
	Drainage	mm(inch)	R3/4in(DN20)	R3/4in(DN20)	R3/4in(DN20)	R3/4in(DN20)	R3/4in(DN20)	R3/4in(DN20)
Stuffing Quantity	20/40/40H	unit	108/208/260	108/208/260	108/208/260	108/208/260	108/208/260	108/208/260

Specification-50Hz

Model	Indoor	ARVCA-H90/4R1YB	ARVCA-H100/4R1YB	ARVCA-H112/4R1YB	ARVCA-H125/4R1YB	ARVCA-H140/4R1YB	
Capacity	Cooling	kW	9.0	10.0	11.2	12.5	14.0
	Heating	kW	10.0	11.2	12.8	14.0	15.0
Electric Data	Power Supply	V~,Hz,Ph	220~240,50,1	220~240,50,1	220~240,50,1	220~240,50,1	220~240,50,1
	Rated Power	W	100	190	190	190	190
Performance	Air Flow Volume(Hi/Mid/Low)	m ³ /h	1400/1200/1000	1850/1440/1260	1850/1440/1260	1850/1440/1260	1850/1440/1260
	Noise Level(Hi/Mid/Low)	dB(A)	43/39/37	45/40/39	45/40/39	45/40/39	46/41/39
Dimension (WxDxH)	Net(Body)	mm	840x840x246	840x840x288	840x840x288	840x840x288	840x840x288
	Packing(Body)	mm	915x915x315	915x915x355	915x915x355	915x915x355	915x915x355
	Net(Panel)	mm	950x950x55	950x950x55	950x950x55	950x950x55	950x950x55
	Packing(Panel)	mm	1000x1000x100	1000x1000x100	1000x1000x100	1000x1000x100	1000x1000x100
Weight	Net/Gross(Body)	kg	25/29	28.5/32.5	28.5/32.5	28.5/32.5	28.5/32.5
	Net/Gross(Panel)	kg	5.7/8.3	5.7/8.3	5.7/8.3	5.7/8.3	5.7/8.3
Refrigerant Type			R410A	R410A	R410A	R410A	R410A
Pipe Diameter	Liquid Side	mm(inch)	9.52	9.52	9.52	9.52	9.52
	Gas Side	mm(inch)	15.88	15.88	15.88	15.88	15.88
	Drainage	mm(inch)	R3/4in(DN20)	R3/4in(DN20)	R3/4in(DN20)	R3/4in(DN20)	R3/4in(DN20)
Stuffing Quantity	20/40/40H	unit	77/164/175	77/164/175	77/164/175	77/164/175	77/164/175

Model	Indoor	ARVCA-H80/NR3DQB	ARVCA-H90/NR3DQB	ARVCA-H100/NR3DQB	ARVCA-H112/NR3DQB	ARVCA-H125/NR3DQB	ARVCA-H140/NR3DQB	
Capacity	Cooling	kW	8.0	9.0	10.0	11.2	12.5	14.0
	Heating	kW	9.0	10.0	11.2	13.0	14.0	16.0
Electric Data	Power Supply	V~,Hz,Ph	220~240,50/60Hz,1	220~240,50/60Hz,1	220~240,50/60Hz,1	220~240,50/60Hz,1	220~240,50/60Hz,1	220~240,50/60Hz,1
	Rated Power	W	40	80	80	80	80	80
Performance	Air Flow Volume(Hi/Mid/Low)	m ³ /h	1150/920/800	1450/1205/960	1450/1205/960	1600/1440/1260	1800/1440/1260	1800/1440/1260
	Noise Level(Hi/Mid/Low)	dB(A)	41/38/36	42/39/36	42/39/36	44/41/38	46/42/39	46/42/39
Dimension (W								

Wall-mounted



Specification- 50/60Hz

Model	Indoor	ARVWM-H022/NR1DJA	ARVWM-H028/NR1DJA	ARVWM-H036/NR1DJA
Capacity	Cooling kW	2.2	2.8	3.6
	Heating kW	2.6	3.2	4.0
Electric Data	Power Supply V~,Hz,Ph	220~240,50/60,1	220~240,50/60,1	220~240,50/60,1
	Rated Power W	20	20	20
Performance	Air Flow Volume(Hi/Mid/Low) m³/h	520/460/400	520/460/400	520/460/400
	Noise Level(Hi/Mid/Low) dB(A)	38/33/27	38/33/27	38/33/27
Dimension (WxHxD)	Net mm	881x294x194	881x294x194	881x294x194
	Packing mm	965x370x282	965x370x282	965x370x282
Weight	Net/Gross kg	10.5/13.0	10.5/13.0	10.5/13.0
	Liquid Side mm(inch)	6.35(1/4)	6.35(1/4)	6.35(1/4)
Pipe Diameter	Gas Side mm(inch)	9.52(3/8)	9.52(3/8)	9.52(3/8)
	Drainage mm(inch)	R3/4in(DN20)	R3/4in(DN20)	R3/4in(DN20)
Stuffing Quantity	20/40/40H	unit	316/647/737	316/647/737

Specification- 50/60Hz

Model	Indoor	ARVWM-H045/NR1DJA	ARVWM-H056/NR1DJA	ARVWM-H071/NR1DJA
Capacity	Cooling kW	4.5	5.6	7.1
	Heating kW	5.0	6.3	8.0
Electric Data	Power Supply V~,Hz,Ph	220~240,50/60,1	220~240,50/60,1	220~240,50/60,1
	Rated Power W	30	30	40
Performance	Air Flow Volume(Hi/Mid/Low) m³/h	850/750/660	850/750/660	1000/900/800
	Noise Level(Hi/Mid/Low) dB(A)	42/38/34	42/38/34	44/40/37
Dimension (WxHxD)	Net mm	997x316x227	997x316x227	1132x330x232
	Packing mm	1067x385x312	1067x385x312	1205x400x317
Weight	Net/Gross kg	13.5/16.5	13.5/16.5	15.5/19.0
	Liquid Side mm(inch)	6.35(1/4)	6.35(1/4)	6.35(1/4)
Pipe Diameter	Gas Side mm(inch)	12.7(1/2)	12.7(1/2)	15.88(5/8)
	Drainage mm(inch)	R3/4in(DN20)	R3/4in(DN20)	R3/4in(DN20)
Stuffing Quantity	20/40/40H	unit	241/498/563	241/498/563
				176/410/465

Notes:

1.Cooling Capacity: Indoor temperature 27°C DB/19°C WB; Outdoor temperature:35°C DB/24°C WB.

2.Heating Capacity: Indoor temperature 20°C DB; Outdoor temperature:7°C DB/6°C WB.

3.Piping Length:Equivalent piping length: 7.5m,level difference: 0m.

4.Sound level is measured 1m below the air outlet horizontally and vertically.

5.The above designs and specifications are subject to change without prior notice. Final specifications please refer to technical specification provided by sales representative.

Remarks:

1.Data from AUX lab, Data may change according to test surroundings, AUX reserves right of explanation on data.

2.All specifications are subject to change by the manufacturer without prior notice.

Wall-mounted C



Specification-50Hz

Model	Indoor	ARVWM-H080/NR1DCA	ARVWM-H090/NR1DCA
Capacity	Cooling kW	8	9
	Heating kW	9	10
Power Supply	V~,Hz,Ph	220~240,50/60,1	220~240,50/60,1
	Air Flow Volume(Hi/Mid/Low) m³/h	1500/1400/1100/950	1500/1400/1100/950
Performance	Noise Level(Hi/Mid/Low) dB(A)	48/46/43/40/38	48/46/43/40/38
	Net (WxHxD) mm	1460*375*270	1460*375*270
Dimension (WxDxH)	Packing (WxHxD) mm	1555*460*377	1555*460*377
	Weight Net/Gross kg	23/27	23/27
Pipe Diameter	Liquid Side mm(inch)	9.52(3/8)	9.52(3/8)
	Gas Side mm(inch)	15.88(5/8)	15.88(5/8)
Stuffing Quantity	Drainage mm(inch)	R3/4in(DN20)	R3/4in(DN20)
	unit	109/232/257	109/232/257

Specification-50Hz

Model	Indoor	ARVWM-H100/NR1DCA	ARVWM-H110/NR1DCA
Capacity	Cooling kW	10	11
	Heating kW	11	12.0
Power Supply	V~,Hz,Ph	220~240,50/60,1	220~240,50/60,1
	Air Flow Volume(Hi/Mid/Low) m³/h	1500/1400/1100/950	1500/1400/1100/950
Performance	Noise Level(Hi/Mid/Low) dB(A)	48/46/43/40/38	48/46/43/40/38
	Net (WxHxD) mm	1460*375*270	1460*375*270
Dimension (WxDxH)	Packing (WxHxD) mm	1555*460*377	1555*460*377
	Weight Net/Gross kg	23/27	23/27
Pipe Diameter	Liquid Side mm(inch)	9.52(3/8)	9.52(3/8)
	Gas Side mm(inch)	15.88(5/8)	15.88(5/8)
Stuffing Quantity	Drainage mm(inch)	R3/4in(DN20)	R3/4in(DN20)
	unit	109/232/257	109/232/257

Notes:

1.Cooling Capacity: Indoor temperature 27°C DB/19°C WB; Outdoor temperature:35°C DB/24°C WB.

2.Heating Capacity: Indoor temperature 20°C DB; Outdoor temperature:7°C DB/6°C WB.

3.Piping Length:Equivalent piping length: 7.5m,level difference: 0m.

4.Sound level is measured 1m below the air outlet horizontally and vertically.

5.The above designs and specifications are subject to change without prior notice. Final specifications please refer to technical specification provided by sales representative.

Remarks:

1.Data from AUX lab, Data may change according to test surroundings, AUX reserves right of explanation on data.

2.All specifications are subject to change by the manufacturer without prior notice.

Indoor Unit

Slim Duct(Q Series)



Indoor Unit

Mid ESP Duct



Specification-50/60Hz

Model	Indoor	ARVLD-H15/NR1DQ	ARVLD-H22/NR1DQ	ARVLD-H28/NR1DQ	ARVLD-H36/NR1DQ
Capacity	Cooling	kW	1.5	2.2	2.8
	Heating	kW	1.8	2.5	3.2
Electric Data	Power Supply	V~,Hz,Ph	220-240~,50/60Hz,1	220-240~,50/60Hz,1	220-240~,50/60Hz,1
	Rated Power	W	31	31	31
Performance	Air Flow Volume(Tu/Hi/Mid/Low)m ³ /h		460/400/340	460/400/340	460/400/340
	Noise Level(Hi/Mid/Low)	dB(A)	30/26/22	30/26/22	30/26/22
Dimension (WxDxH)	External Static Pressure(ESP)	Pa	13(0~50)	13(0~50)	13(0~50)
	Net	mm	550x450x198	550x450x198	550x450x198
Weight	Packing	mm	715x535x255	715x535x255	715x535x255
	Liquid Side	mm(inch)	6.35(1/4)	6.35(1/4)	6.35(1/4)
Pipe Diameter	Gas Side	mm(inch)	9.52(3/8)	9.52(3/8)	12.7(1/2)
	Drainage	mm(inch)	R1in(DN25)	R1in(DN25)	R1in(DN25)
Stuffing Quantity	20/40/40H	unit	306/621/720	306/621/720	243/504/570

Specification-50/60Hz

Model	Indoor	ARVLD-H45/NR1DQ	ARVLD-H56/NR1DQ	ARVLD-H71/NR1DQ	
Capacity	Cooling	kW	4.5	5.6	
	Heating	kW	5.0	6.3	
Electric Data	Power Supply	V~,Hz,Ph	220-240~,50/60Hz,1	220-240~,50/60Hz,1	
	Rated Power	W	31	31	
Performance	Air Flow Volume(Tu/Hi/Mid/Low)m ³ /h		800/680/550	900/750/600	1145/945/700
	Noise Level(Hi/Mid/Low)	dB(A)	30/26/22	30/26/22	36/32/28
Dimension (WxDxH)	External Static Pressure(ESP)	Pa	13(0~50)	13(0~50)	13(0~50)
	Net	mm	900x450x198	900x450x198	1100x450x198
Weight	Packing	mm	1065x535x255	1065x535x255	1265x535x255
	Liquid Side	mm(inch)	6.35(1/4)	6.35(1/4)	9.52(3/8)
Pipe Diameter	Gas Side	mm(inch)	12.7(1/2)	12.7(1/2)	15.88(5/8)
	Drainage	mm(inch)	R1in(DN25)	R1in(DN25)	R1in(DN25)
Stuffing Quantity	20/40/40H	unit	198/396/440	198/396/440	171/360/400

Notes:

1.Cooling Capacity: Indoor temperature 27°C DB/19°C WB; Outdoor temperature:35°C DB/24°C WB.

2.Heating Capacity: Indoor temperature 20°C DB; Outdoor temperature:7°C DB/6°C WB.

3.Piping Length:Equivalent piping length: 7.5m, level difference: 0m.

4.Sound level is measured at 1.4m below the unit.

5.The above designs and specifications are subject to change without prior notice. Final specifications please refer to technical specification provided by sales representative.

Remarks:

1.Data from AUX lab, Data may change according to test surroundings, AUX reserves right of explanation on data.

2.All specifications are subject to change by the manufacturer without prior notice.

Notes:

1.Cooling Capacity: Indoor temperature 27°C DB/ 19°C WB; Outdoor temperature:35°C DB/ 24°C WB.

2.Heating Capacity: Indoor temperature 20°C DB; Outdoor temperature: 7°C DB/ 6°C WB.

3.Piping Length: Equivalent piping length: 7.5m, level difference: 0m.

4.Sound level is measured at 1.4m below the unit.

5.The above designs and specifications are subject to change without prior notice. Final specifications please refer to technical specification provided by sales representative.

Remarks:

1.Data from AUX lab, Data may change according to test surroundings, AUX reserves right of explanation on data.

2.All specifications are subject to change by the manufacturer without prior notice.

Indoor Unit

Mid ESP Duct



Specification-50Hz

Model	Indoor	ARVMD-H45/NR1DM	ARVMD-H56/NR1DM	ARVMD-H71/NR1DM	ARVMD-H80/NR1DM	ARVMD-H90/NR1DM
Capacity	Cooling kW	4.5	5.6	7.1	8.0	9.0
	Heating kW	5.6	6.3	8.0	9.0	10.0
Electric Data	Power Supply V~,Hz,Ph	220~240,50/60,1	220~240,50/60,1	220~240,50/60,1	220~240,50/60,1	220~240,50/60,1
	Rated Power W	110	110	125	125	150
Performance	Air Flow Volume(Tu/Hi/Mid/Low)m ³ /h	1000/920/790/700	1000/920/790/700	1680/1350/1100/950	1680/1680/1350/1100/950	1710/1400/1120/950
	Noise Level(Hi/Mid/Low) dB(A)	39/37/35	39/37/35	40/38/36	41/39/37	41/39/37
	External Static Pressure(ESP) Pa	50(0-150)	50(0-150)	50(0-150)	50(0-150)	50(0-150)
Dimension (WxDxH)	Net mm	1000x700x245	1000x700x245	1000x700x245	1000x700x245	1000x700x245
	Packing mm	1230*830*300	1230*830*300	1230*830*300	1230*830*300	1230*830*300
Weight	Net/Gross kg	30/36	30/36	30/36	30/36	32/38
	Liquid Side mm(inch)	9.52	9.52	9.52	9.52	9.52
Pipe Diameter	Gas Side mm(inch)	15.88	15.88	15.88	15.88	15.88
	Drainage mm(inch)	R3/4in(DN20)	R3/4in(DN20)	R3/4in(DN20)	R3/4in(DN20)	R3/4in(DN20)
Stuffing Quantity	20/40/40H unit	72/151/164	72/151/164	72/151/164	72/151/164	72/151/164

Specification-50Hz

Model	Indoor	ARVMD-H100/NR1DM	ARVMD-H112/NR1DM	ARVMD-H125/NR1DM	ARVMD-H140/NR1DM	ARVMD-H150/NR1DM	ARVMD-H160/NR1DM
Capacity	Cooling kW	10.0	11.2	12.5	14.0	15.0	16.0
	Heating kW	11.2	12.5	14.0	16.0	17.0	18.0
Electric Data	Power Supply V~,Hz,Ph	220~240,50/60,1	220~240,50/60,1	220~240,50/60,1	220~240,50/60,1	220~240,50/60,1	220~240,50/60,1
	Rated Power W	150	230	230	230	250	250
Performance	Air Flow Volume(Tu/Hi/Mid/Low)m ³ /h	1710/1400/1120/950	2300/1900/1600/1400	2300/1900/1600/1400	2300/1900/1600/1400	2400/2000/1700/1500	2300/1900/1600/1400
	Noise Level(Hi/Mid/Low) dB(A)	42/40/38	44/42/40	44/42/40	44/42/40	45/43/41	44/42/40
	External Static Pressure(ESP) Pa	50(0-150)	50(0-150)	50(0-150)	50(0-150)	50(0-150)	50(0-150)
Dimension (WxDxH)	Net mm	1000x700x245	1400x700x245	1400x700x245	1400x700x245	1400x700x245	1400x700x245
	Packing mm	1230*830*300	1630x830x300	1630x830x300	1630x830x300	1630x830x300	1630x830x300
Weight	Net/Gross kg	32/38	41/48	41/48	41/48	41/48	43/50
	Liquid Side mm(inch)	9.52	9.52	9.52	9.52	9.52	9.52
Pipe Diameter	Gas Side mm(inch)	15.88	15.88	15.88	15.88	15.88	15.8
	Drainage mm(inch)	R3/4in(DN20)	R3/4in(DN20)	R3/4in(DN20)	R3/4in(DN20)	R3/4in(DN20)	R3/4in(DN20)
Stuffing Quantity	20/40/40H unit	72/151/164	49/98/112	49/98/112	49/98/112	49/98/112	49/98/112

Notes:

1.Cooling Capacity: Indoor temperature 27°C DB/ 19°C WB; Outdoor temperature:35°C DB/ 24°C WB.

2.Heating Capacity: Indoor temperature 20°C DB; Outdoor temperature:7°C DB/ 6°C WB.

3.Piping Length: Equivalent piping length: 7.5m, level difference: 0m.

4.Sound level is measured at 1.4m below the unit.

5.The above designs and specifications are subject to change without prior notice. Final specifications please refer to technical specification provided by sales representative.

Remarks:

1.Data from AUX lab, Data may change according to test surroundings, AUX reserves right of explanation on data.

2.All specifications are subject to change by the manufacturer without prior notice.

Indoor Unit

High ESP Duct



Specification-50Hz

Model	Indoor	ARVHD-H112/4R1A	ARVHD-H125/4R1A	ARVHD-H140/4R1A	ARVHD-H150/4R1A	ARVHD-H450/5R1Y	ARVHD-H560/5R1Y
Capacity	Cooling kW	11.2	12.5	14.0	15.0	45.0	56.0
	Heating kW	12.8	13.3	15.0	16.0	56.0	61.5
Electric Data	Power Supply V~,Hz,Ph	220~240,50,1	220~240,50,1	220~240,50,1	220~240,50,1	380~415,,50,3	380~415,,50,3
	Rated Power W	600	600	600	600	1520	1520
Performance	Air Flow Volume(Hi/Mid/Low)m ³ /h	2000/1600/1400	2000/1600/1400	2000/1600/1400	2000/1600/1400	6500	7400
	Noise Level(Hi/Mid/Low) dB(A)	60/57/51	60/57/51	60/57/51	60/57/51	59	59
	External Static Pressure(ESP) Pa	196	196	196	196	200	200
Dimension (WxDxH)	Net mm	1200x719x380	1200x719x380	1200x719x380	1200x719x380	2115x990x855	2115x990x855
	Packing mm	1235x760x415	1235x760x415	1235x760x415	1235x760x415	2225x1025x1015	2225x1025x1015
Weight	Net/Gross kg	56/59	56/59	56/59	56/59	225/255	225/255
	Liquid Side mm(inch)	9.52	9.52	9.52	9.52	12.7x2	12.7x2
Pipe Diameter	Gas Side mm(inch)	19.05	19.05	19.05	19.05	22.2x2	22.2x2
	Drainage mm	R3/4in(DN20)	R3/4in(DN20)	R3/4in(DN20)	R3/4in(DN20)	R1in(DN25)	R1in(DN25)
Stuffing Quantity	20/40/40H unit	68/147/168	68/147/168	68/147/168	68/147/168	2024/12/24	2024/12/24

Specification-50/60Hz

Model	Indoor	ARVHD-H220/NR1DC	ARVHD-H280/NR1DC
Capacity	Cooling kW	22.4	28.0
	Heating kW	25.0	31.5
Electric Data	Power Supply V~,Hz,Ph	220~240,50/60,1	220~240,50/60,1
	Rated Power W	1200	1200
Performance	Air Flow Volume m ³ /h	4400	4400
	Noise Level dB(A)	57	57
	External Static Pressure(ESP) Pa	170(30-250)	170(30-250)
Dimension (WxDxH)	Net mm	1388*715*480	1388*715*480
	Packing mm	1540*810*610	1540*810*610
Weight	Net/Gross kg	99/120	99/120
	Liquid Side mm(inch)	12.7(1/2)	12.7(1/2)
Pipe Diameter	Gas Side mm(inch)	22.2(7/8)	22.2(7/8)
	Drainage mm	OD33.5	OD33.5
Stuffing Quantity	20/40/40H unit	30/63/84	30/63/84

Notes:

1.Cooling Capacity: Indoor temperature 27°C DB/ 19°C WB; Outdoor temperature:35°C DB/ 28°C WB.

2.Heating Capacity: Indoor temperature 20°C DB; Outdoor temperature: 7°C DB/ 6°C WB.

3.Piping Length: Equivalent piping length: 7.5m, level difference: 0m.

4.Sound level is measured at 1.4m below the unit.

5.The above designs and specifications are subject to change without prior notice. Final specifications please refer to technical specification provided by sales representative.

Remarks:

1.Data from AUX lab, Data may change according to test surroundings, AUX reserves right of explanation on data.

2.All specifications are subject to change by the manufacturer without prior notice.

Fresh Air Processor



Specification-50/60Hz

Model	Indoor		ARVFA-H220/NR1DC	ARVFA-H280/NR1DC
Capacity	Cooling	kW	22.4	28.0
	Heating	kW	18.0	22.0
Electric Data	Power Supply	V~,Hz,Ph	220~240V,50/60,1	220~240V,50/60,1
	Rated Power	W	900	900
Performance	Air Flow Volume	m ³ /h	3200	3200
	Noise Level	dB(A)	55	55
	External Static Pressure(ESP)	Pa	220	220
Dimension (WxDxH)	Net	mm	1388×715×480	1388×715×480
	Packing	mm	1540×810×610	1540×810×610
Weight	Net/Gross	kg	99/120	99/120
	Liquid Side	mm(inch)	12.7(1/2)	12.7(1/2)
Pipe Diameter	Gas Side	mm(inch)	22.2(7/8)	22.2(7/8)
	Drainage	mm	OD33.5	OD33.5
Stuffing Quantity	20/40/40H	unit	30/63/84	30/63/84

Specification-50Hz

Model	Indoor		ARVFA-H450/5R1A	ARVFA-H560/5R1A
Capacity	Cooling	kW	45.0	56.0
	Heating	kW	49.5	61.5
Electric Data	Power Supply	V~,Hz,Ph	380~415,50/60,3	380~415,50/60,3
	Rated Power	W	1520	1520
Performance	Air Flow Volume	m ³ /h	4000	5000
	Noise Level	dB(A)	57	59
	External Static Pressure(ESP)	Pa	220	220
Dimension (WxDxH)	Net	mm	1820×990×855	2115×990×855
	Packing	mm	1935×1025×1015	2225×1025×1015
Weight	Net/Gross	kg	150/170	225/255
	Liquid Side	mm(inch)	12.7×2	12.7×2
Pipe Diameter	Gas Side	mm(inch)	22.2×2	22.2×2
	Drainage	mm	DN25	DN25
Stuffing Quantity	20/40/40H	unit	12/24/24	12/24/24

Notes:
1.Cooling Capacity: Outdoor temperature 35°C DB/28°C WB.
2.Heating Capacity: Outdoor temperature 7°C DB/6°C WB.
3.Piping Length: Equivalent piping length: 7.5m, level difference: 0m.
4.Sound level is measured at 1.4m below the unit.
5.The above design and specifications are subject to change without prior notice. Final specifications please refer to technical specification provided by sales representative.
Connection Conditions:
When only outdoor-air processing units are connected, the total capacity of the outdoor-air processing units must be within 50%~100% of the outdoor units.
When outdoor-air processing units and other type indoor units are connected, the total capacity of the outdoor-air processing units must not exceed 30% of the outdoor units.

Remarks:
1.Data from AUX lab, Data may change according to test surroundings, AUX reserves right of explanation on data.
2.All specifications are subject to change by the manufacturer without prior notice.

Ceiling&Floor



Specification-50/60Hz

Model	Indoor		ARVCF-H28/NR1DF	ARVCF-H36/NR1DF	ARVCF-H45/NR1DF	ARVCF-H56/NR1DF	ARVCF-H71/NR1DF
Capacity	Cooling	kW	2.8	3.6	4.5	5.6	7.1
	Heating	kW	3.2	4.3	5.0	6.3	8.0
Electric Data	Power Supply	V~,Hz,Ph	220-240V,50/60,1	220-240V,50/60,1	220-240V,50/60,1	220-240V,50/60,1	220-240V,50/60,1
	Rated Power	W	40	40	40	40	40
Performance	Air Flow Volume (TuHi/Mid/Low/SI)	m ³ /h	940/895/700/650/600	940/895/700/650/600	940/895/700/650/600	940/895/700/650/600	940/895/700/650/600
	Noise Level(TuHi/Mi/Lo/SI)	dB(A)	42/41/38/37/36	42/41/38/37/36	42/41/38/37/36	42/41/38/37/36	42/41/38/37/36
Dimension (WxDxH)	Net	mm	1000×690×235	1000×690×235	1000×690×235	1000×690×235	1000×690×235
	Packing	mm	1080×770×325	1080×770×325	1080×770×325	1080×770×325	1080×770×325
Weight	Net	kg	29/33.5	29/33.5	29/33.5	29/33.5	29/33.5
	Liquid Side	mm(inch)	6.35(1/4)	6.35(1/4)	6.35(1/4)	6.35(1/4)	6.35(1/4)
Pipe Diameter	Gas Side	mm(inch)	12.7(1/2)	12.7(1/2)	12.7(1/2)	12.7(1/2)	12.7(1/2)
	Drainage	mm(inch)	R3/4in(DN20)	R3/4in(DN20)	R3/4in(DN20)	R3/4in(DN20)	R3/4in(DN20)
Stuffing Quantity	20/40/40H	unit	112/224/264	112/224/264	112/224/264	112/224/264	112/224/264


Specification-50/60Hz

Model	Indoor		ARVCF-H80/NR1DF	ARVCF-H90/NR1DF	ARVCF-H112/NR1DF	ARVCF-H125/NR1DF	ARVCF-H140/NR1DF
Capacity	Cooling	kW	8.0	9.0	11.2	12.5	14.0
	Heating	kW	9.0	11.0	12.8	14.0	15.0
Electric Data	Power Supply	V~,Hz,Ph	220-240V,50/60,1	220-240V,50/60,1	220-240V,50/60,1	220-240V,50/60,1	220-240V,50/60,1
	Cooling/Heating Power Input	W	70	70	120	120	120
Performance	Air Flow Volume (TuHi/Mid/Low/SI)	m ³ /h	1300/1245/1020/930/840	1300/1245/1020/930/840	2040/1890/1740/1560/1440	2040/1890/1740/1560/1440	2040/1890/1740/1560/1440
	Noise Level(TuHi/Mi/Lo/SI)	dB(A)	43/42/39/38/37	43/42/39/38/37	50/49/45/43/41	50/49/45/43/41	50/49/45/43/41
Dimension (WxDxH)	Net	mm	1280×690×235	1280×690×235	1600×690×235	1600×690×235	1600×690×235
	Packing	mm	1360×770×325	1360×770×325	1680×770×325	1680×770×325	1680×770×325
Weight	Net/Gross	kg	35.5/41	35.5/41	42/49	42/49	42/49
	Liquid Side	mm(inch)	9.52(3/8)	9.52(3/8)	9.52(3/8)	9.52(3/8)	9.52(3/8)
Pipe Diameter	Gas Side	mm(inch)	15.88(5/8)	15.88(5/8)	15.88(5/8)	15.88(5/8)	15.88(5/8)
	Drainage	mm(inch)	R3/4in(DN20)	R3/4in(DN20)	R3/4in(DN20)	R3/4in(DN20)	R3/4in(DN20)
Stuffing Quantity	20/40/40H	unit	84/175/200	84/175/200	70/147/168	70/147/168	70/147/168

Notes:
1.Cooling Capacity: Indoor temperature 27°C DB/19°C WB; Outdoor temperature:35°C DB/24°C WB.
2.Heating Capacity: Indoor temperature 20°C DB; Outdoor temperature:7°C DB/6°C WB.
3.Piping Length:Equivalent piping length: 7.5m, level difference: 0m.
4.Floor standing:Sound level is measured 1m from air-outlet in horizontal distance, 1m above the floor in vertical distance.
5.Ceiling mounted: Sound level is measured 1m from air-outlet in horizontal distance,1m from air-outlet in vertical distance.
6.The above designs and specifications are subject to change without prior notice. Final specifications please refer to technical specification provided by sales representative.

Remarks:
1.Data from AUX lab, Data may change according to test surroundings, AUX reserves right of explanation on data.
2.All specifications are subject to change by the manufacturer without prior notice.

Remote Controller

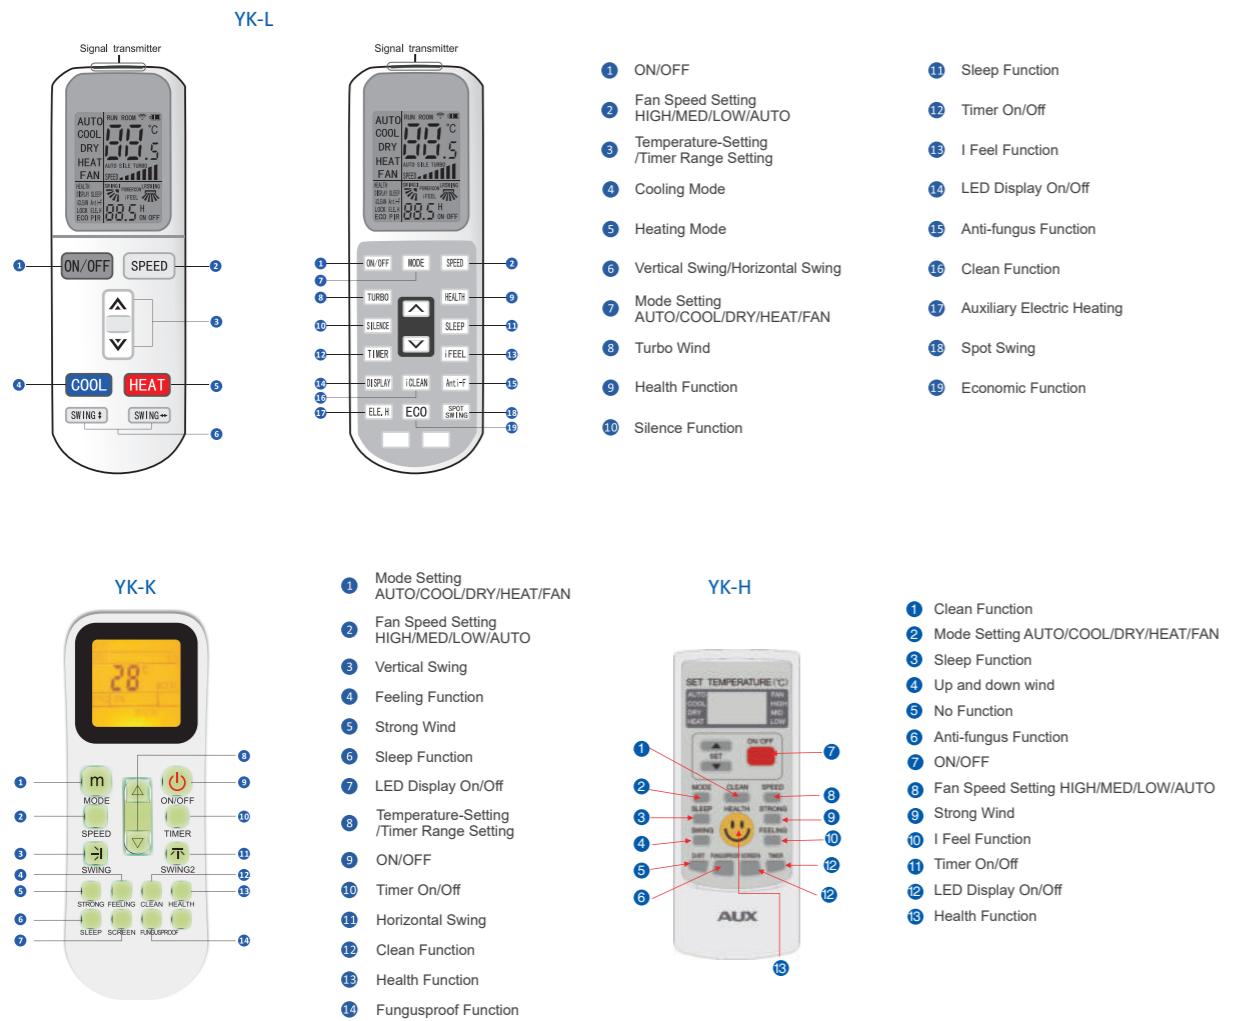


► User-Friendly & Elegant Design

The XK-05A is a hidden-mode controller specially designed for hotels, hospitals, schools, offices. Fitted with a background light as standard, easy to use in the dark night.



► Keyboard Locking

The locking function could prevent other people changing the setting state at will in public places.

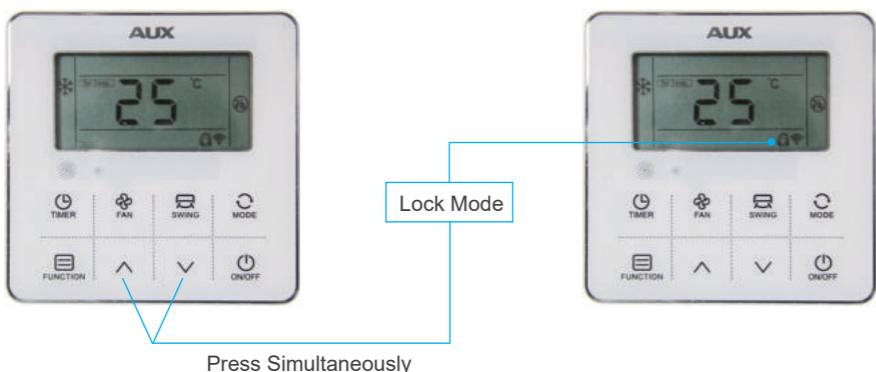

► Features

Specifications

Model	XK-05A
Dimension (WxHxD) (mm)	120×120×18
Power Supply(V)	DC 12V by IDU

► Error Reporting

If there is a malfunction, error codes are displayed in the temperature setting area of the controller's display screen.




XK-06A

► New Features

Weekly timer function

Easy setting of weekly running status

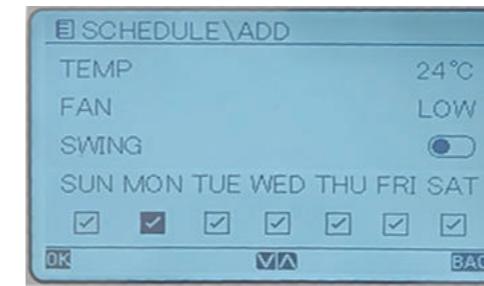

Display room temp (Optional)

Accurately display room temperature



Parameter Setting

Simple and convenient setting of parameter



History errors

Simple and quick search of history errors



► Features

Specifications

► Features

Specifications

Model	XK-06A
Dimension (WxHxD) (mm)	120×120×20
Power Supply(V)	DC 12V by IDU

Centralized Controllers

► Touch Screen Centralized Control

The AUX touch screen centralized controller is a multi-functional device that can control up to 256 indoor units within a maximum connection length of 1000 meters.



* Data from AUX Performance Lab on May 8, 2024.

► Multi-system Control

256 indoor units with no repeated address from different outdoor systems could be centralized controlled together. this greatly reduces system limitations.



► Multiple Lock function

The new centralized controller could not only lock their own keyboards, it could also enable the users lock each unit's setting mode or remote controller.



► Weekly Schedule Control

The CC-02 centralized controller's weekly schedule timer function allows users to set up to four scheduled periods per day, each with its own operation mode and temperature setting.




► Indoor Units Operation Status Display

Error and protection codes are shown directly on centralized controller's displays, no need to access outdoor unit's PCBs to obtain codes. The building management professionals could inquire a wide range of historical error and protection codes to get the system status information before contacting a service engineer.



► Central controller & connection(Mini VRF)

The centralized controllers could be connected directly to the master outdoor unit or any indoor unit of each system so it significantly simplify wiring configuration.

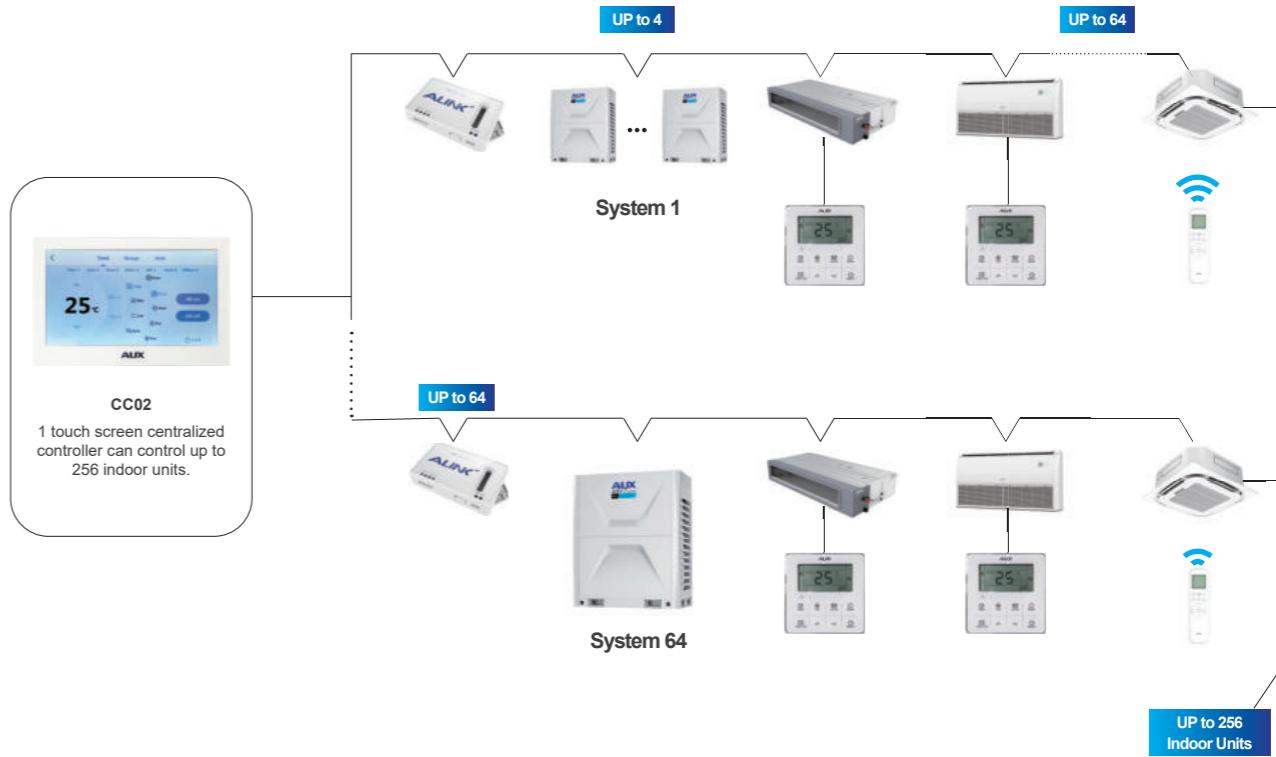


Main Components of Centralized Controller

Model	CC-02	CM-MTD/AM01
		
Dimension(W×H×D) (mm)	176x116x12 (Outside the wall) 120x60x25 (Inside the wall)	127 x65.8x20.8mm
Power supply	AC 180-240V (50/60Hz)	DC 12V


► Central controller & connection (ARV7/ARV7S)

Meet different air solution for kinds of application sites.

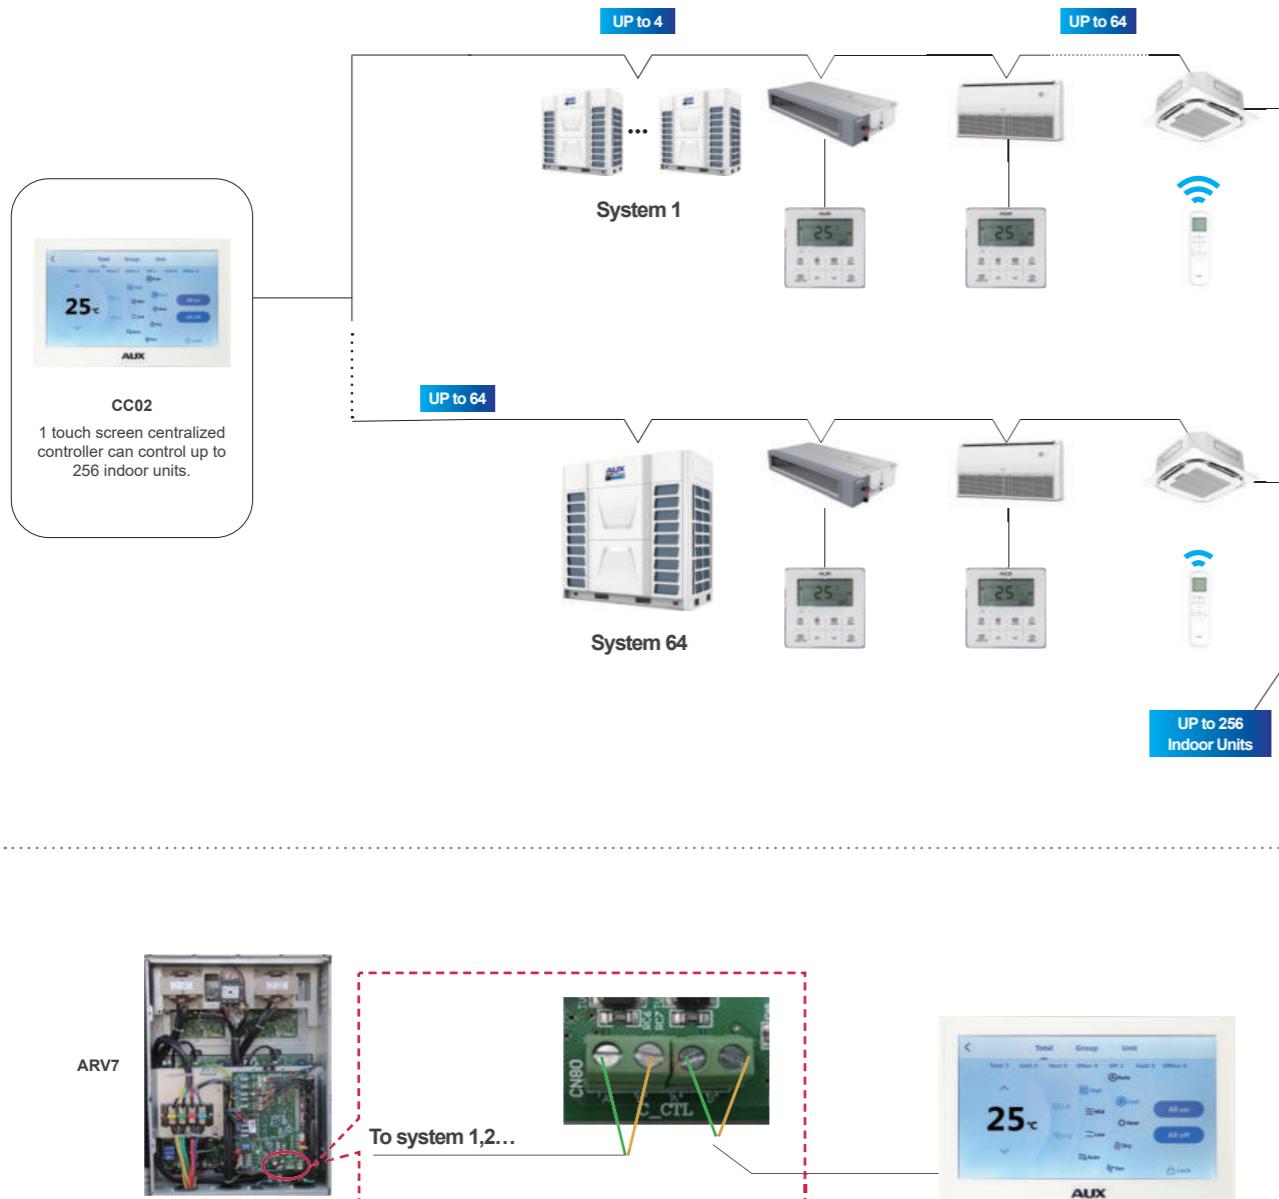

Centralized Control Software

► System Overview

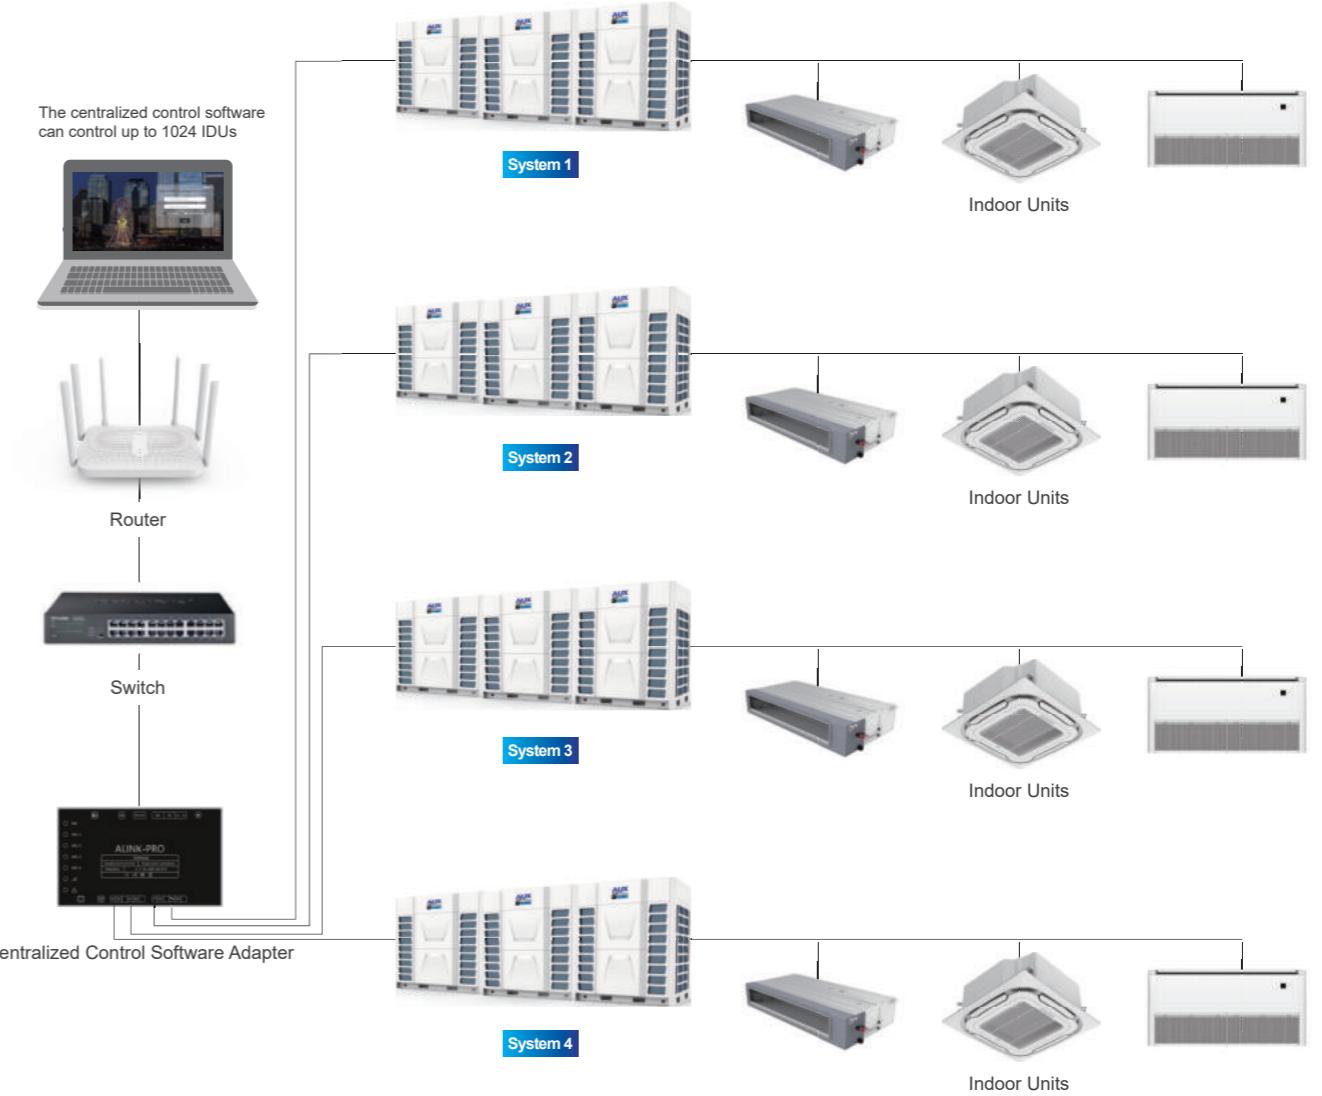

Notes:

It needs to set C9 and C10 parameters. For details, please contact AUX technical engineers

► System Overview



Users do not need to go to the harsh environment of the site, they can monitor the function of units just through computer. This greatly improves convenience of daily management and the efficiency of central air conditioners; Timely find the fault and save the maintenance cost of air conditioner units, minimize losses; Timer function with multi-period week, fully automated schedule planning of unit;

► Main Components Of Centralized Control System

No	Main Components	Requirement & Function
1	Adapter/Gateway	<p>1. Model: CM-PTD/A02 2. Power: DC 9~24V400mA 3. Communication:RS485 4. LAN (DHCP to obtain IP automatically) 5. Baud rate: 9600, 6. "even parity" by number of systems 7. Working condition: -25°C ~55°C , 45%~75% 7.Dimension:178mm×115mm×85mm</p>
2	Centralized control software	AUX intelligent management system


Notes:
Routers, switches and other equipments are purchased locally by the user

► Software Introduction Main Interface

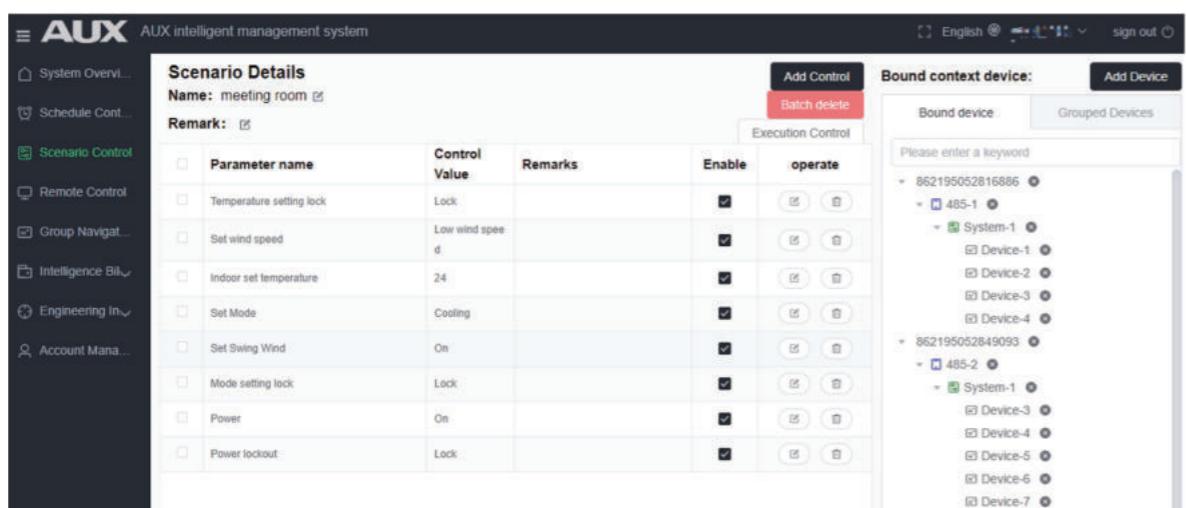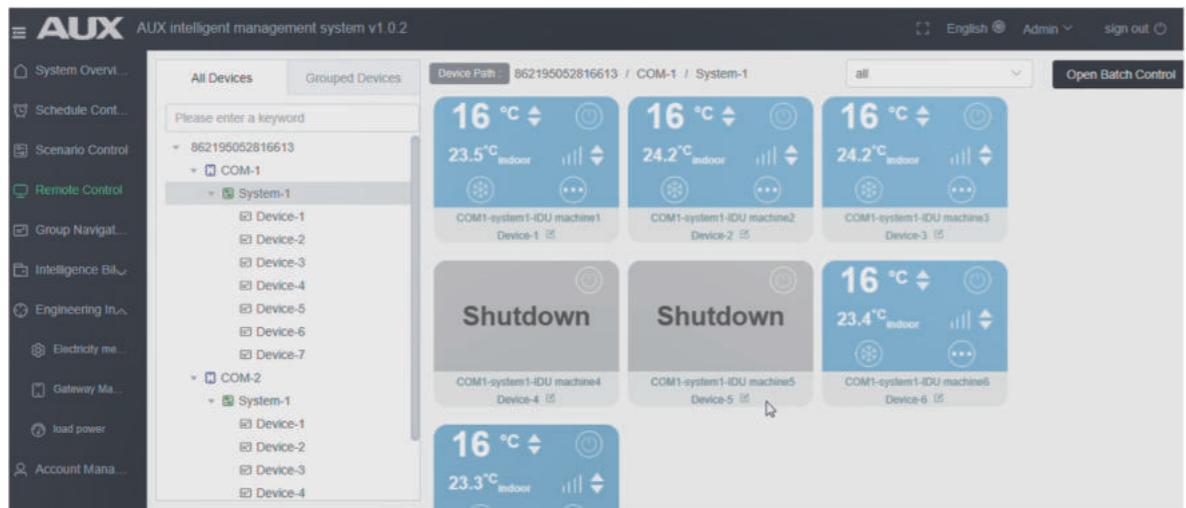

Tenant billing solution

► System Overview

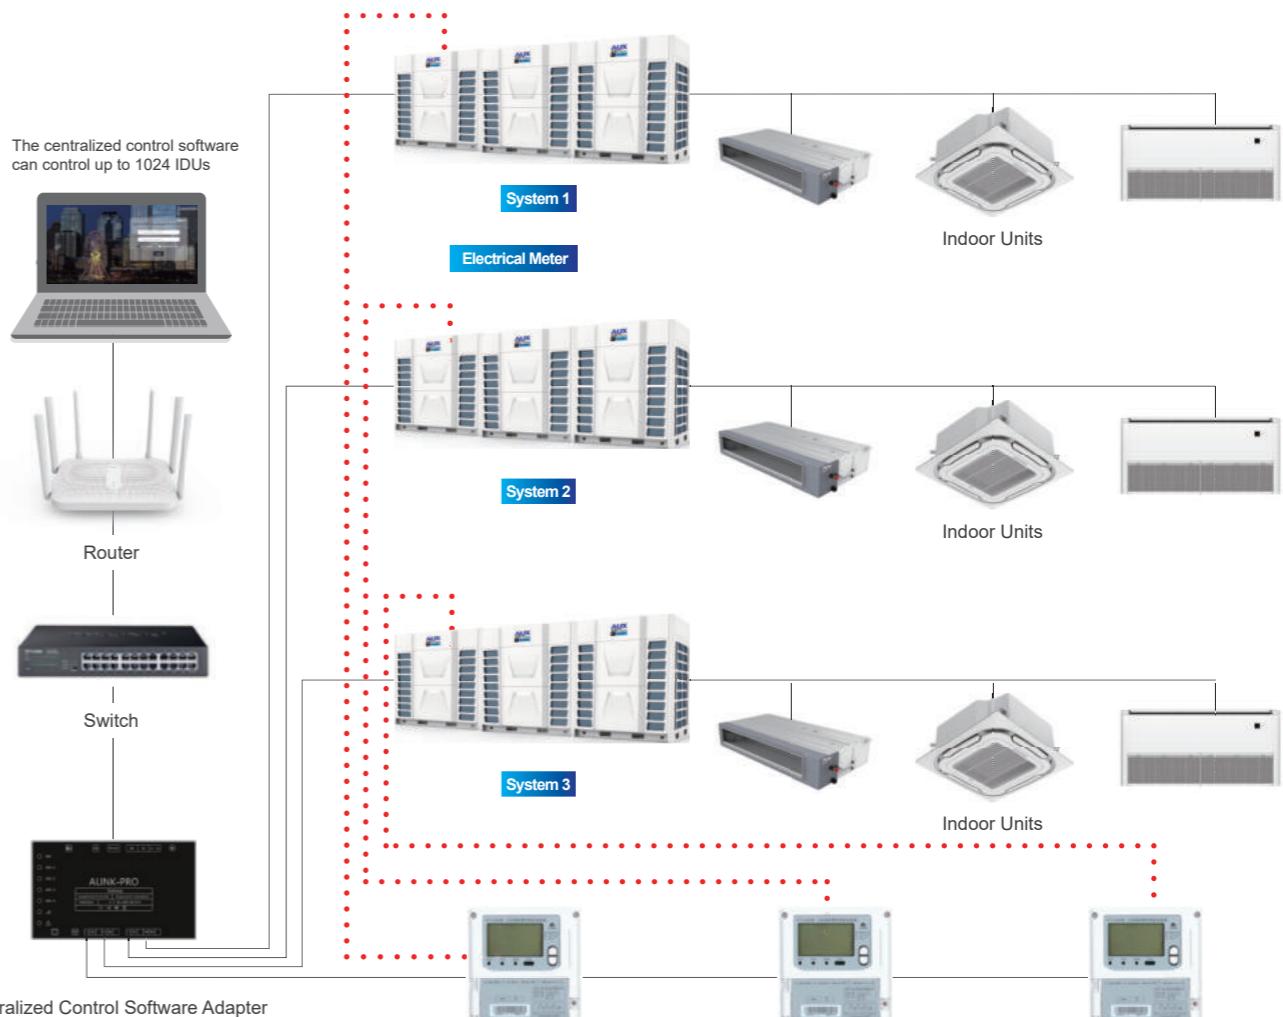

► System Overview

A function that proportionally distributes the total power used by the air conditioners in a rental building, measured by using an electricity meter among the tenants. This function is very suitable for ARV System.

► Main Components Of Centralized Control System


No	Main Components	Requirement & Function
1	Adapter/Gateway	<ul style="list-style-type: none"> 1. Model: CM-PTD/A02 2. Power: DC 9~24V,400mA 3. Communication:RS485 4. LAN (DHCP to obtain IP automatically) 4. Baud rate:9600, 5. "even parity" by number of systems 6. Working condition: -25°C ~55°C , 45%~75% 7. Dimension:178mmx115mmx85mm
2	Electrical Meter	<ul style="list-style-type: none"> 1. Model: DTZY188 2. Voltage: 380V-3ph , 3. Max current : 100A 4. Communication type:RS485 5. Protocol:DL/T 645-2007; 6. Baud rate:9600, parity type :"even parity" 7. Operation: Temp(-25~55°C),humid(45~75%) 8. Dimension: 290x170x85mm
3	Centralized control software	AUX intelligent management system

Notes:
Routers, switches and other equipments are purchased locally by the user


► Software Introduction Main Interface

BMS System

► Overall Structure

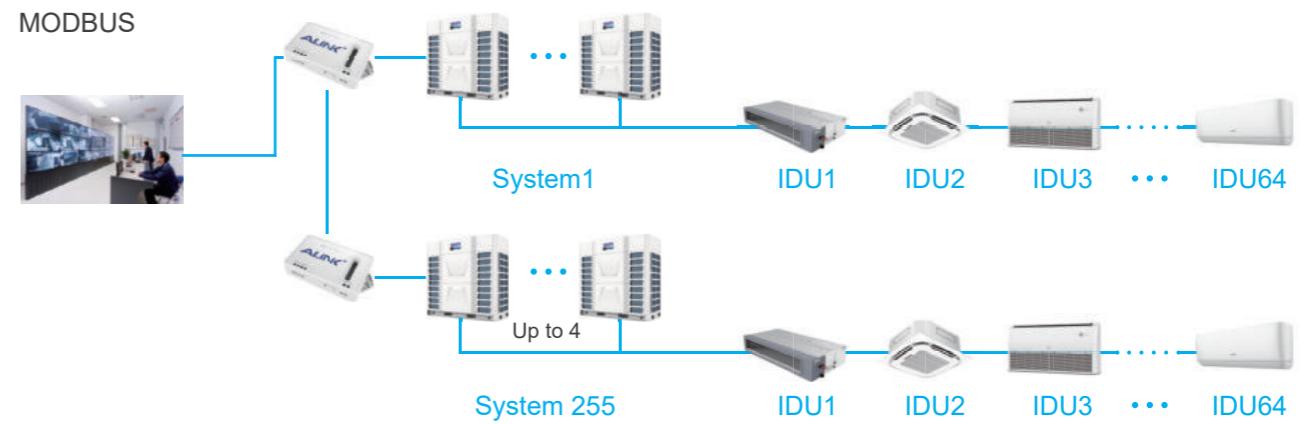

Notes:
MINI VRF requires connection to MINI gateway
For details, please contact AUX technical engineers

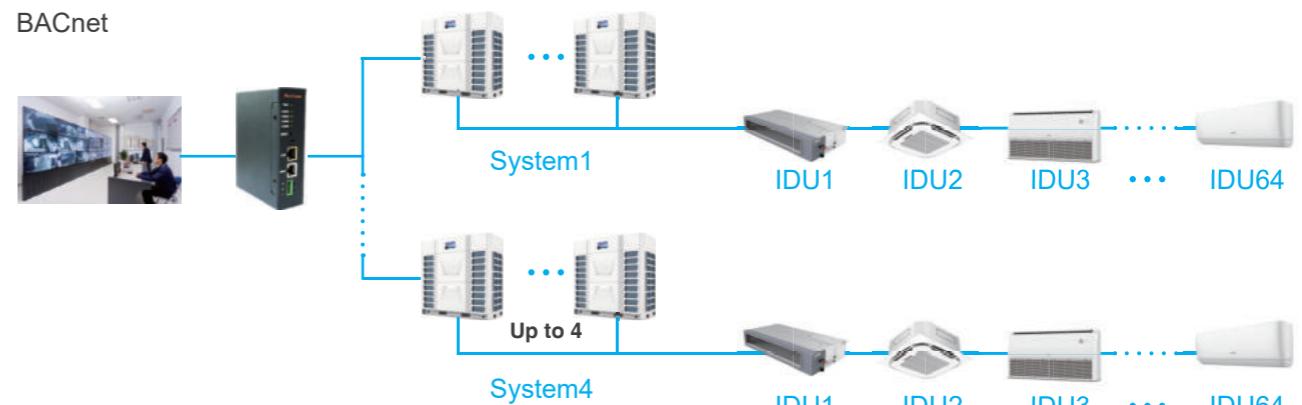

Model	CM-MTD/AM01	Bacnet gateway
Dimension(W×H×D)mm	127×65.8×20.8	115×35×135
Power supply	DC 12V	DC 24V,7W
Feature	Max.255	Unlimited(HUB)

Wireless Network Control

► Schematic Diagram



► Features

1. AUX air conditioner can connect to intelligent terminal through WIFI or GPRS network, customers can enjoy fun and convenience of remote control the AC via iphone, ipad and other mobile terminals(Android and IOS) at anytime and anywhere.
2. The function of software on Mobile terminal includes mode control, temperature control, swing control, timing control.
3. Customers can set schedule to plan their day, also the scene mode can be set conveniently.

Accessories-AHU Kit




Model	AHU Capacity	Net Dimension (W×D×H)mm	Packing Dimension (W×D×H)mm	Net Weight (kg)	Gross Weight (kg)	DX coil volume (min-max)dm ³	Reference air volume(m ³ /h)	Power supply
ARVK-0B	2.2~3.6	573×447×180	655×525×250	10.9	13.4	0.4~0.45	550	220-240V,50,1
	3.6~4.5					0.45~0.55	600	
	4.5~5.6					0.55~0.65	750	
	5.6~7.1					0.65~0.75	900	
	7.1~8.0					0.75~1.2	1000	
	8.0~9.0					1.2~1.66	1300	
	9.0~11.2					1.66~2.06	1400	
	11.2~14.0					2.06~2.58	2000	
	14.0~16.0					2.58~3.22	2400	
	16.0~20.0					3.32~3.69	2700	
ARVK-01B	20.0~25.0					3.7~4.6	3000	
	25.0~30.0					4.6~5.5	3800	
	30.0~36.0					5.6~6.6	4500	
	36.0~40.0					6.6~7.4	5500	
	40.0~45.0					7.4~8.3	6000	
ARVK-02B	45.0~50.0					8.3~9.2	7000	
	50.0~56.0					9.2~10.3	8000	
	56.0~65.0					9.63~11.56	8200	
	65.0~70.0					11.03~12.54	9400	
	70.0~76.0					11.90~13.30	10200	
ARVK-03B	76.0~80.0					12.62~14.01	10800	
	80.0~90.0					13.40~15.26	11800	
	90.0~100.0					15.26~17.80	13400	
	100.0~112.0					17.51~19.61	15000	

Remarks: applicable to MINI VRF (capacity \geq 12KW)

Remarks:


1. Data from AUX lab, Data may change according to test surroundings, AUX reserves right of explanation on data.
2. All specifications are subject to change by the manufacturer without prior notice.

► Single AHU connection

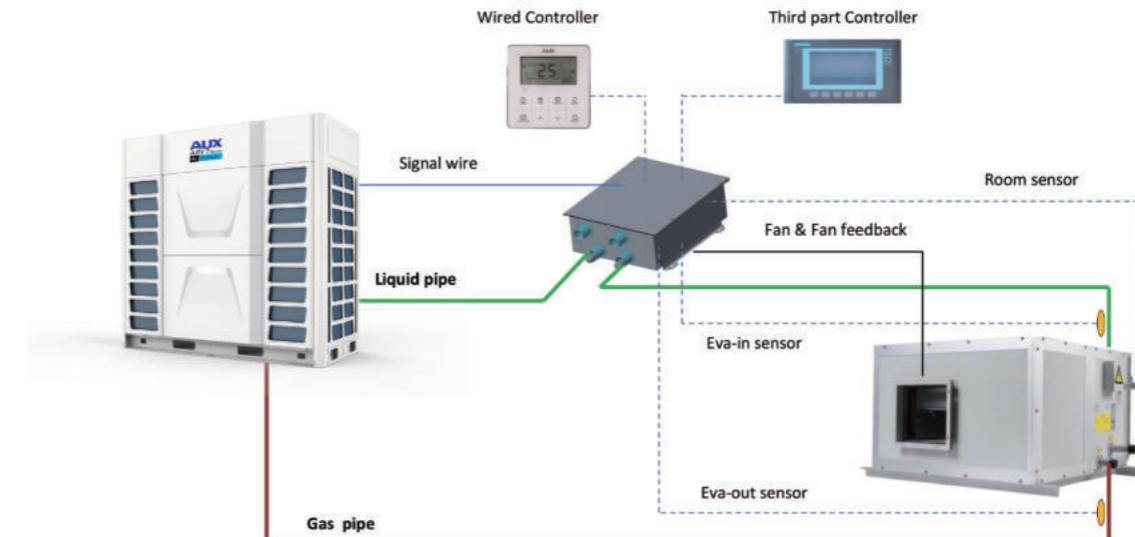

Above diagram suitable for factory default control, 0-10V(temperature control), 0-10V(pressure control)

► Multi AHU connection

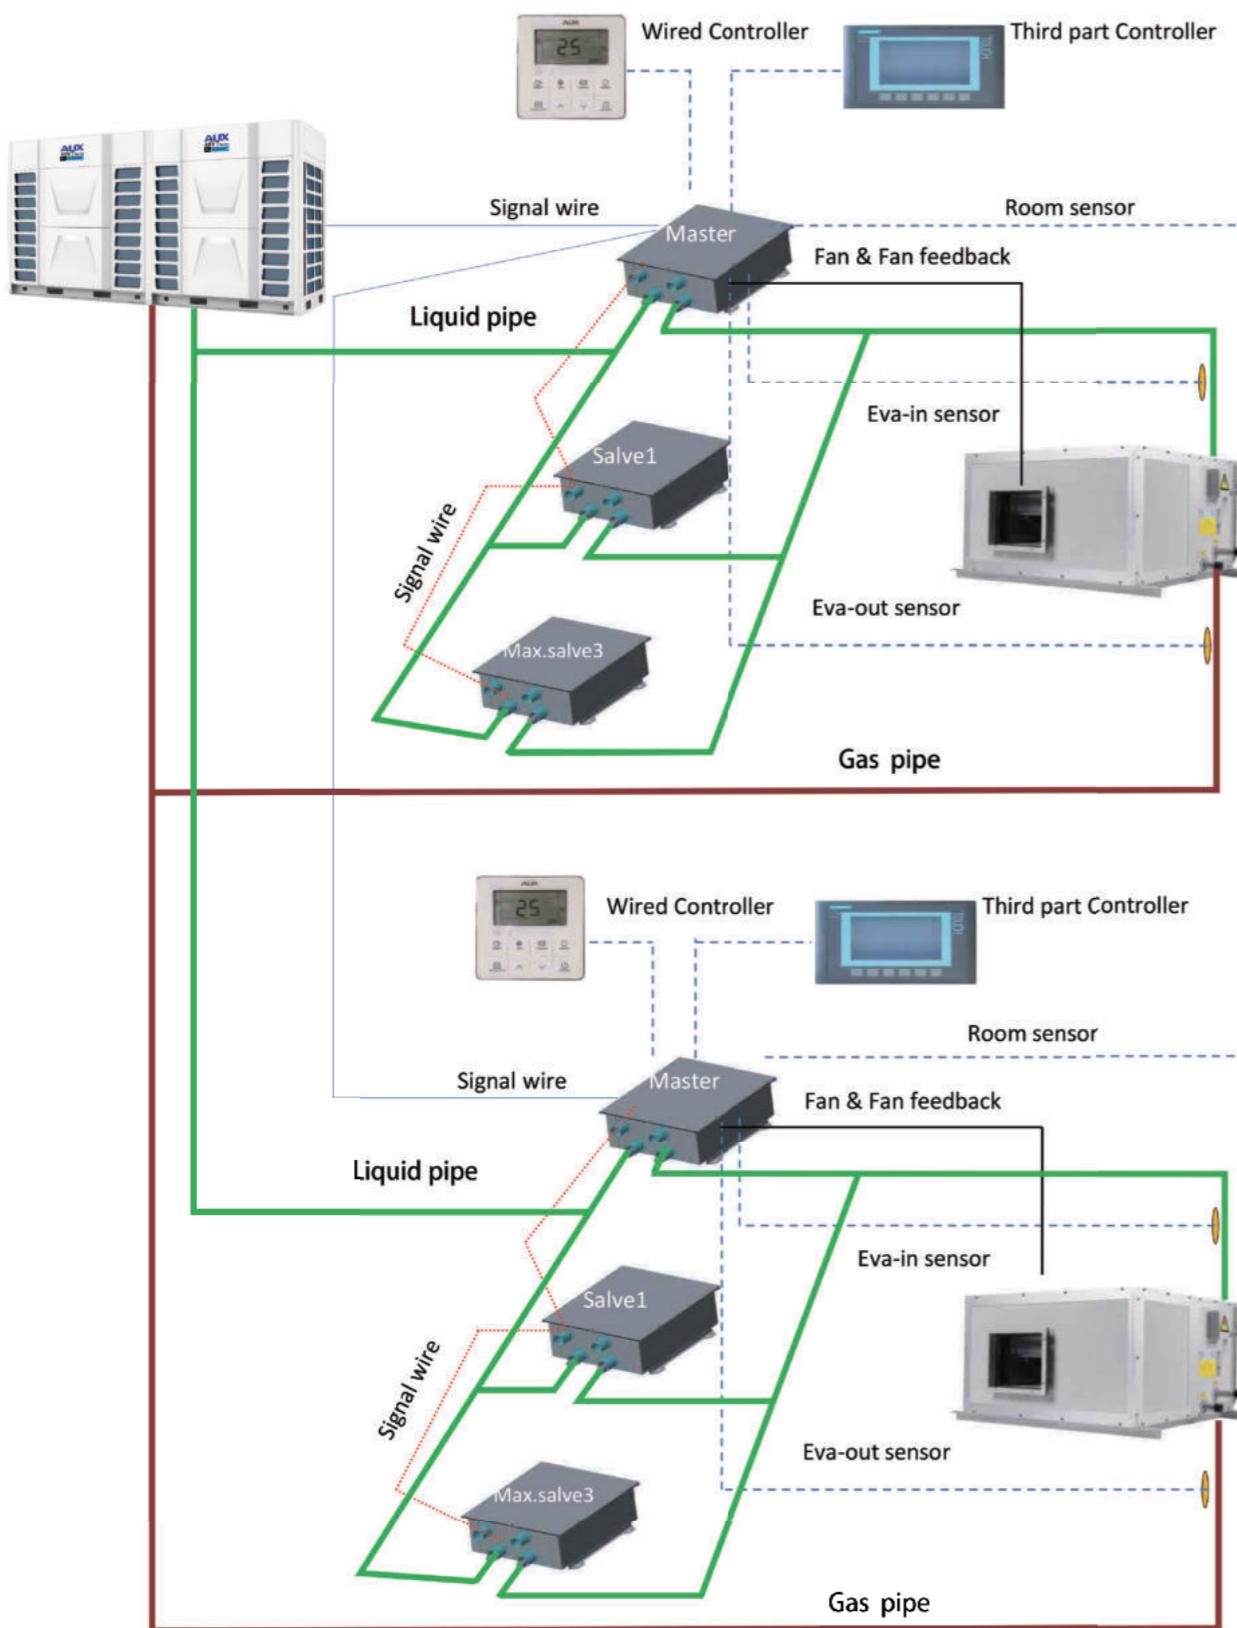


Above diagram suitable for factory default control, 0-10V(temperature control)

Accessories-Selection Software



To meet the customers' requirements, AUX has developed the advanced selection software. The software provides quick and convenient selectable options for users, supports multiple languages, greatly improves the selection and installation process.

► 6 Parts Of The ARV Selection

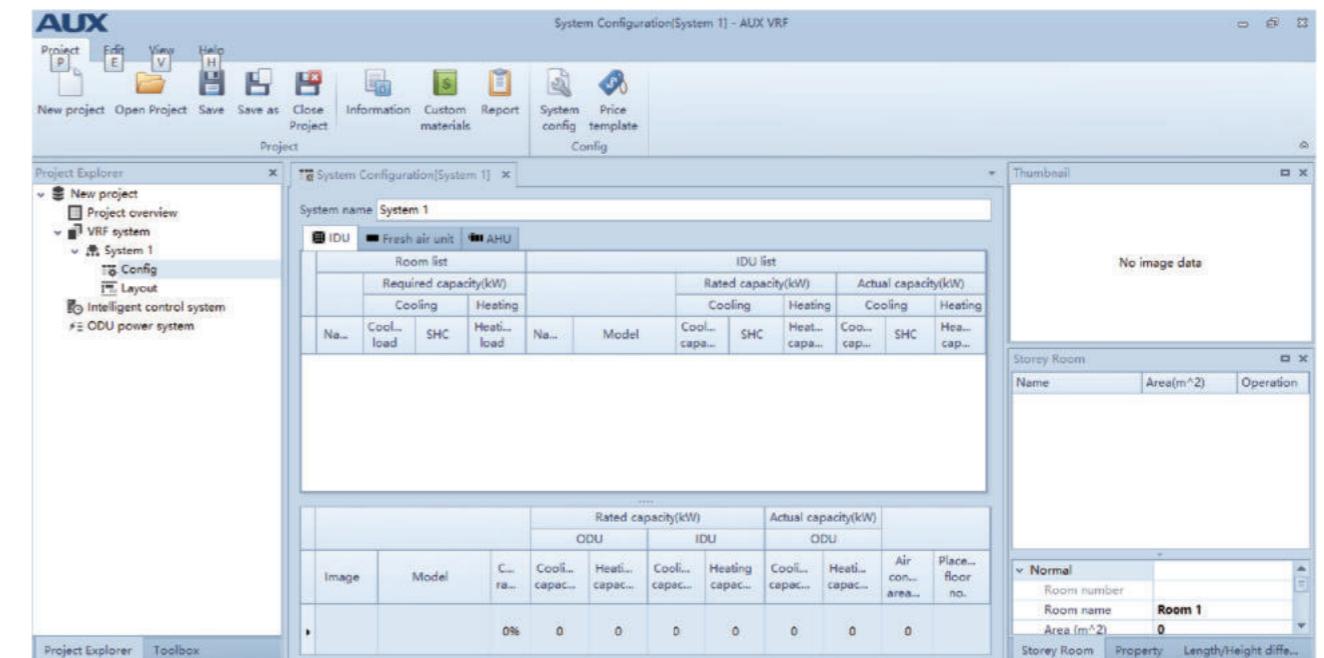

► Revit Models Series


AUX revit is developed to make 3D design (shows Electrical Connector+Pipe Connectors +Produce parameter) of AUX products easier than the previous program. It enables engineers to check 3D images from design stage and prevents possible issues of the installation stage.

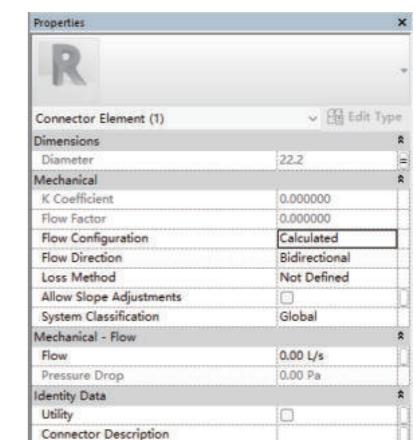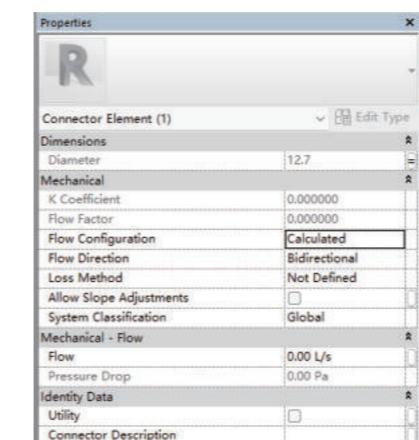

Accessories-Monitoring Software


Self-diagnosis software can be used as remote controller, it is recommended for commissioning. It can monitor the running state of the outdoor and indoor units real time. And display the malfunctions, be convenient to do the commissioning and trouble-shooting work.

► Monitoring Software

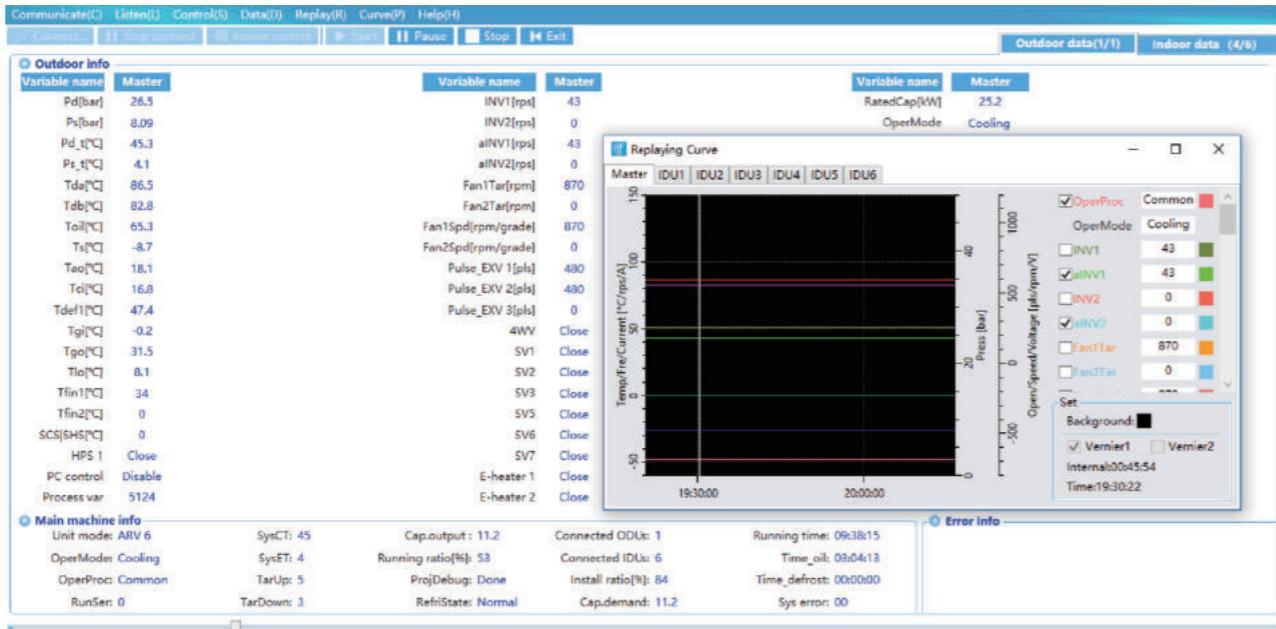

HRV-Heat Recovery Ventilator

Nomenclature

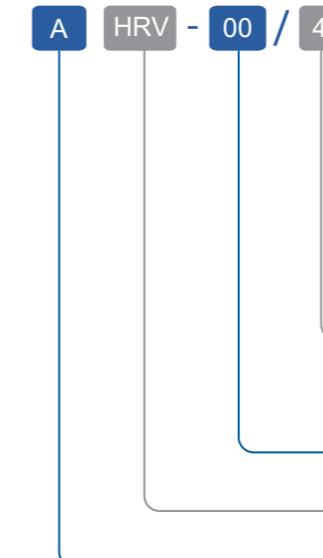


Power Supply:
4:220-240V~, 1Ph, 50Hz
5:380-415V~, 3Ph, 50Hz

Air Flow Volum(m³/h)

Heat Recovery Ventilator

AUX

► Installation Diagram

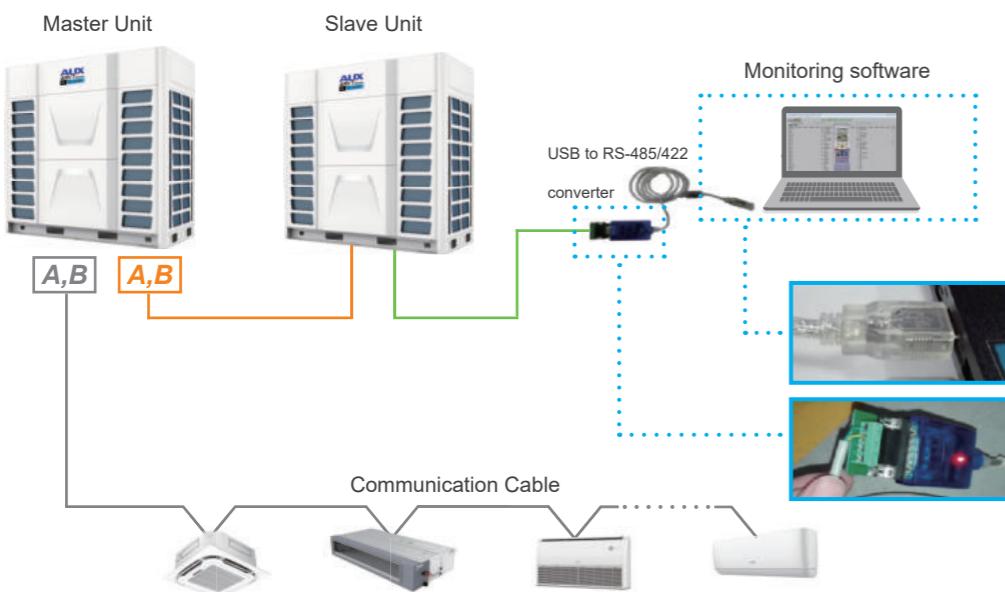


HRV-Heat Recovery Ventilator

Adopt Centrifugal Fan With Lower Power Consumption And Longer Air Supply Distance; Easy Control, Friendly Operation.

Units with a voltage range of 220V~240V are equipped with a 3-speed fan mode, adjusting the air flow rate in accordance with the ceiling height.

Innovative centrifugal fan provides larger air volume but lower noise, making the air supply more quietly and smoothly.

When the power supply is 380V 3N~/50Hz, only has ON/OFF function.

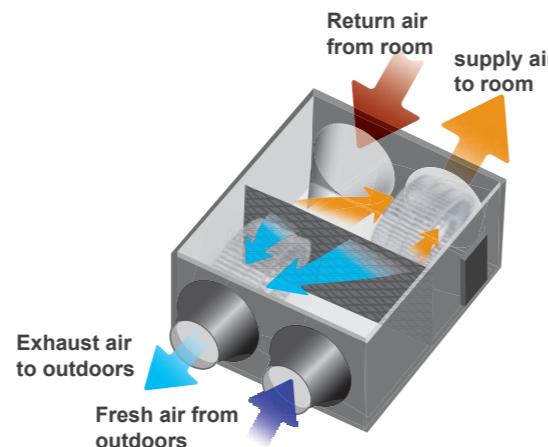

Different Modes For Your Choice

Exhausting mode (Hi/Mid/Low fan speed can be chosen)

Air supply mode (Hi/Mid/Low fan speed can be chosen)

By pass mode (Hi/Mid/Low fan speed can be chosen)

In this mode, there is no heat exchanging happened, which is more energy saving.

For example:

If outdoor temperature is lower than indoor, we don't need heat exchanging, but we need fresh air. We can choose by pass mode.

Heat exchanging mode (Hi/Mid/Low fan speed can be chosen)


In this mode, supply air flow=exhaust air flow.

Auto mode

In this mode, the unit will run at heat exchange mode or by pass mode judged by outdoor temperature and indoor temperature with low speed air flow.

Remark:only available for HRV-200~1000.

HRV

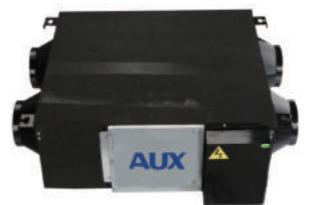


Specification-HRV

Model	AHRV-200/4	AHRV-300/4	AHRV-400/4	AHRV-500/4	AHRV-800/4	AHRV-1000/4
Volume	m ³ /h 200	300	400	500	800	1000
	CFM 118	176	235	294	471	588
External static pressure	Pa 75	75	80	80	100	130
Electric Data	Power Supply V~Hz,Ph 220~240,50,1	220~240,50,1	220~240,50,1	220~240,50,1	220~240,50,1	220~240,50,1
	Power Input W 65	120	200	220	410	510
Cooling	Temp. Efficiency % 60	60	60	60	60	60
	Enthalpy Efficiency % 50	50	50	50	50	50
Heating	Temp. Efficiency % 65	65	65	65	65	65
	Enthalpy Efficiency % 55	55	55	55	55	55
Noise Level	dB(A) 37	39	40	41	43	45
Flange	mm ⌀ 144	⌀ 144	⌀ 144	⌀ 194	⌀ 243	⌀ 243
Net Weight	kg 25	27	30	41	68	82
Net Dimension(WxDxH)	mm 848×654×264	926×722×270	926×927×270	1018×1024×270	1274×1007×388	1274×1257×388
Gross Dimension(WxDxH)	mm 910×710×405	985×775×405	985×980×405	1085×1080×405	1335×1055×533	1345×1315×548















Specification-HRV

Model	AHRV-1500/5	AHRV-2000/5	AHRV-2500/5	AHRV-3000/5	AHRV-4000/5	AHRV-5000/5
Volume	m ³ /h 1500	2000	2500	3000	4000	5000
	CFM 882	1176	1471	1765	2353	2941
External static pressure	Pa 160	170	180	200	220	240
Electric Data	Power Supply V~Hz,Ph 220~240,50,1	220~240,50,1	380~415,50,3	380~415,50,3	380~415,50,3	380~415,50,3
	Power Input W 1000	1200	2000	2100	2400	3000
Cooling	Temp. Efficiency % 60	60	60	60	60	60
	Enthalpy Efficiency % 50	50	50	50	50	50
Heating	Temp. Efficiency % 65	65	65	65	65	65
	Enthalpy Efficiency % 55	55	55	55	55	55
Noise Level	dB(A) 52	60	62	64	66	68
Flange	mm 320×300	320×300	320×300	320×300	323×253	500×690
Net Weight	kg 200	225	240	270	265	280
Net Dimension(WxDxH)	mm 1600×1270×540	1650×1470×540	1710×1400×600	1700×1630×640	1725×1450×1050	1820×1780×1050
Gross Dimension(WxDxH)	mm 1668×1331×720	1770×1550×665	1770×1550×665	1760×1750×770	1785×1510×1180	1880×1840×1150

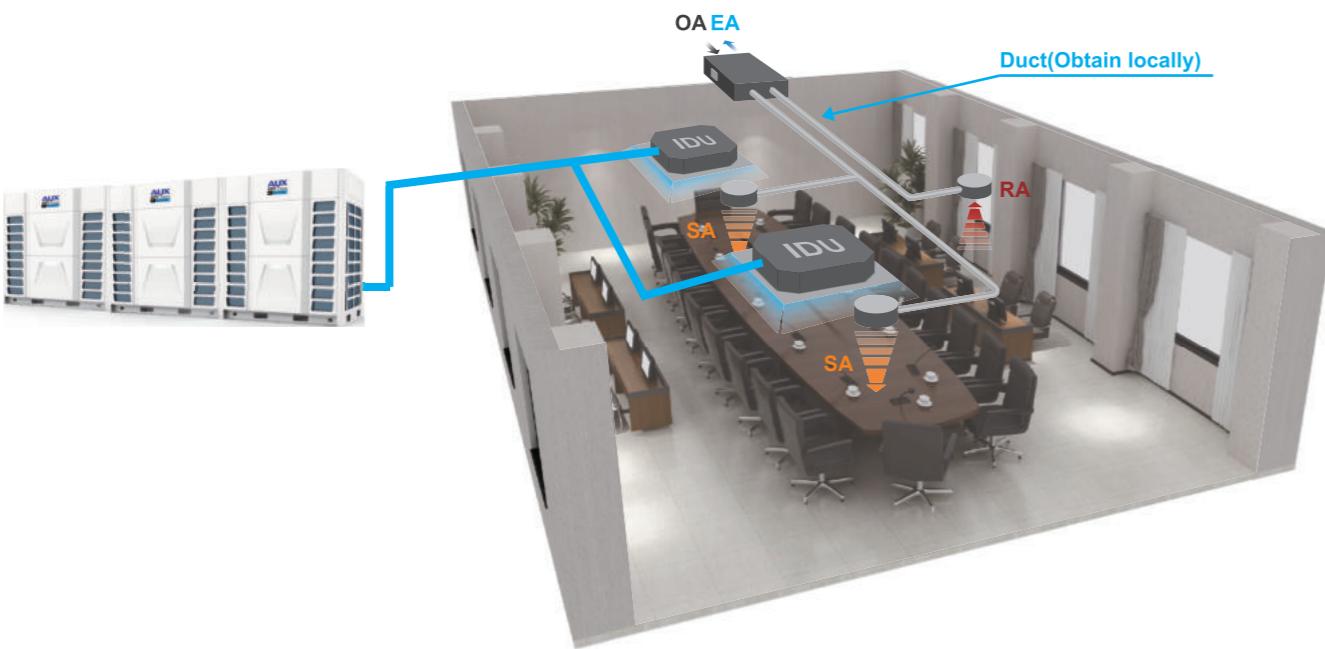

Remarks:

- 1.Data from AUX lab, Data may change according to test surroundings, AUX reserves right of explanation on data.
- 2.All specifications are subject to change by the manufacturer without prior notice.

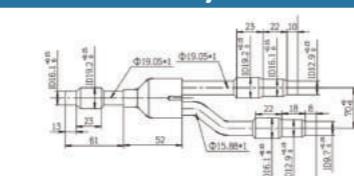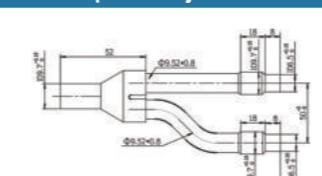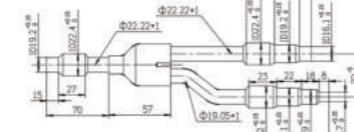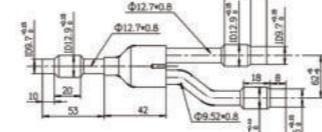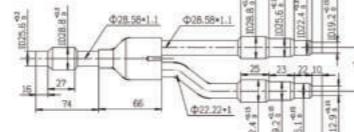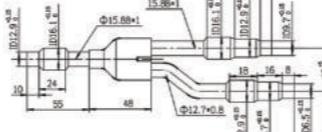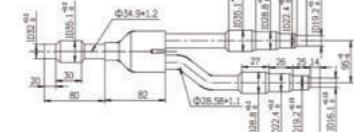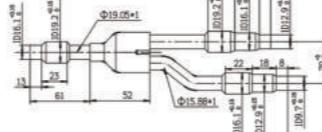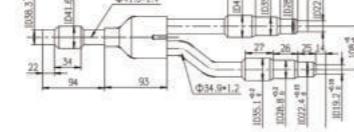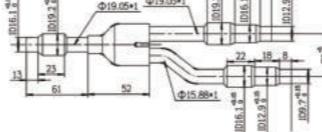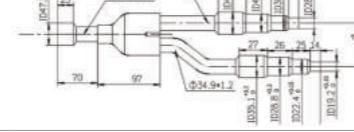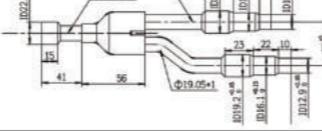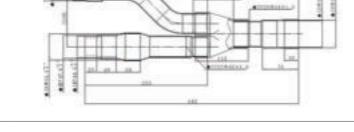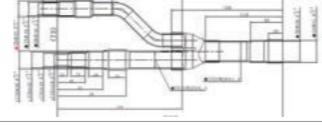Model	Appearance	Dimension	
		Gas side joints	Liquid side joints
AFG-00B			
AFG-12B			
AFG-24B			
AFG-34B			
AFG-50B			
AFG-64B			
AFG-144B			
Model	Packing Dimension(mm)	Net Weight/Gross Weight(kg)	
AFG-00B	300x95x40	0.31/0.35	
AFG-12B	330x100x40	0.44/0.49	
AFG-24B	370x115x45	0.71/0.77	
AFG-34B	440x140x50	1.11/1.20	
AFG-50B	480x160x65	1.65/1.76	
AFG-64B	480x160x65	1.88/1.98	

A*: The total capacity of indoor units which is connected to this branch joint



CTTI Building

Country: Pakistan
City: Islamabad
Capacity 1648KW
Equipment: DC Inverter VRF(ARV6)
Date: 08-2018



Izumi Office building

Country: Burma
City: Yangon
Capacity 150KW
Equipment: DC Inverter VRF(ARV6)
Date: 03-2019



Solar rays building

Country: Burma
City: Yangon
Capacity 210KW
Equipment: DC Inverter VRF(ARV6)
Date: 08-2018



EXPO 2021

Country: UAE
City: Dubai
Capacity 1176KW
Equipment: DC Inverter VRF(MINI ARV)
Date: 09-2019

Project Reference

Project Reference



Shopping Mall

Country: Uzbekistan
City: Tashkent
Capacity 500KW
Equipment: DC Inverter VRF(ARV6)
Date: 10-2020



Unicaf University

Country: Cyprus
City: Larnaca
Capacity 540KW
Equipment: DC Inverter VRF(ARV6)
Date: 09-2020




GEM MALL

Country: Mongolia
City: Ulaanbaatar
Capacity 650KW
Equipment: ARV Individual
Date: 06-2018



Distribution Centre

Country: Russia
City: Vladivostok
Capacity 1730KW
Equipment: ARV6
Date: 2022

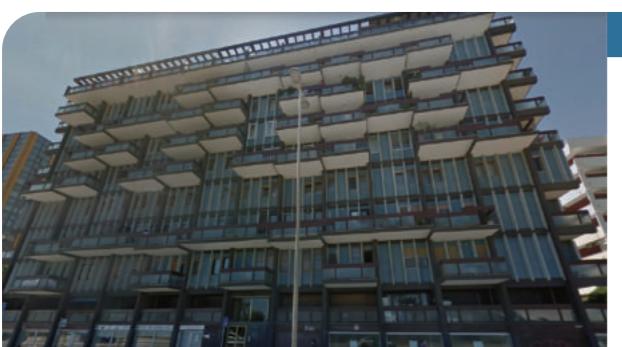

ACTOR STUDIO

Country: Italy
City: Barry
Capacity 585KW
Equipment: DC Inverter VRF(ARV6)
Date: 01-2019



Hotel

Country: Russia
City: St.Petersburg
Capacity 1055KW
Equipment: ARV6
Date: 2022



National Energy Administration

Country: Uzbekistan
City: Tashkent
Capacity 400KW
Equipment: DC Inverter VRF(ARV6)
Date: 10-2020