



Fast Cooling
& Heating



Large
Air



ECO
2.0



PCB Direct
Extraction



3 Proof
Of Odu PCB

FA




Main selling points



FAST COOLING & HEATING

Quickly improving cooling/heating efficiency and spreading cool/hot air throughout the room faster.

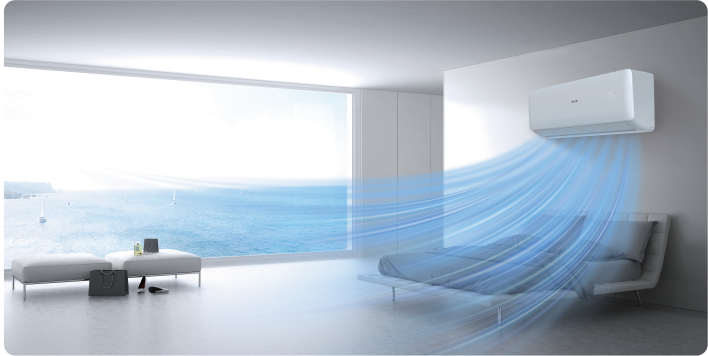

HIGH AIR FLOW

Long-distance air supply, sufficient cold air. Our air conditioners offer superior airflow volume, providing greater comfort.



QUIET

Low noise in indoor operation, making you sleep well. Perfect to use while sleeping.



ECO ENERGY SAVING

Adjusting frequency in cooling mode saves power based on temperature differences.

Specifications

FA							
AUX RAC Model			Unit	ASWH09B5A4 /FAR3DI-B9	ASWH12C5E4 /FAR3DI-C0	ASW-H18E0C4 /FAR3DI-C0	ASW-H24F7C4 /FAR3DI-B9
Nameplate Parameter	Rated Capacity	Cooling	W	2650(600-3100)	3500(800-3800)	5100(1300-5300)	7200(1800-7300)
		Heating	W	2700(800-3400)	3600(1000-4100)	5200(1300-5300)	7200(1800-7400)
	Rated Power Consumption	Cooling	W	810(100-1600)	1180(100-1400)	1680(280-1800)	2300(300-3400)
		Heating	W	720(300-1500)	1100(300-1400)	1430(220-1500)	2300(300-3400)
	Max. Input Power		W	1600	1900	1900	3400
	Max. Input Current		A	8.5	9.5	9	16
	SEER Cooling		W/W	6.1	6.2	6.1	6.5
	SCOP Heating		W/W	4.1	4.1	4.6	4.1
	Power Supply Source		V/Ph/Hz	220-240V-1-50Hz			
	Refrigerant			R32			
	Air Flow Volume		m3/h	600	600	850	1310
	Indoor Unit Weight(Net)		Kg	7.5	8	10	13
	Outdoor Unit Weight(Net)		Kg	18.5	21	22	31.5
IDU	Dimension	Net Dimension(WxDxH)	mm	750*285*200	750*285*200	900*310*225	1082*330*233
		Packing Dimension(WxDxH)	mm	1020*375*305	820*347*277	970*382*302	1155*397*312
Connection	Stop Valve	Liquid Valve		6	6	6	6
		Gas Valve		9	9	12	16
ODU	Dimension	Net Dimension(WxDxH)	mm	650*455*278	709*530*280	709*537*281	825*310*655
		Packing Dimension(WxDxH)	mm	760*315*510	825*595*345	825*345*595	945*435*725