

ADA

AUX
AIR CONDITIONER




Main selling points




BIG SIZE

Bigger size, meeting cooling needs of large rooms.

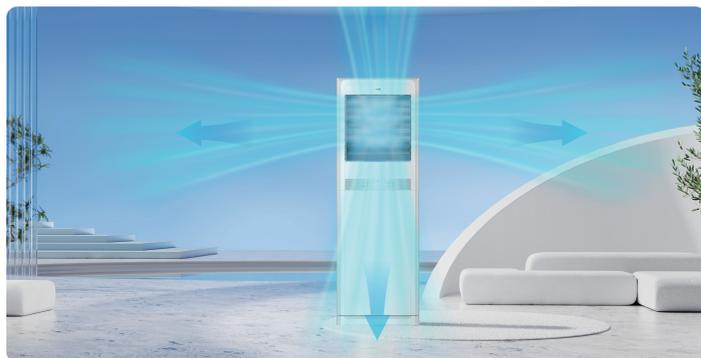

4D AIR FLOW


Multi-directional airflow blows up-down and left-right with 2 step motors.

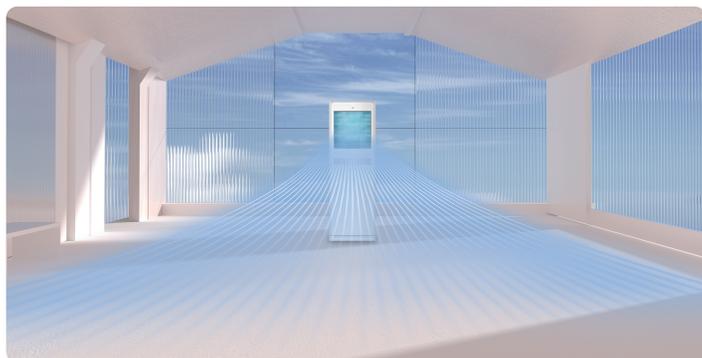

LONG-DISTANCE AIR SUPPLY

25M long distance air supply, sufficient cold air, bringing coolness to every corner of large spaces.

*Data source from AUX Lab, it may vary based on usage and condition.

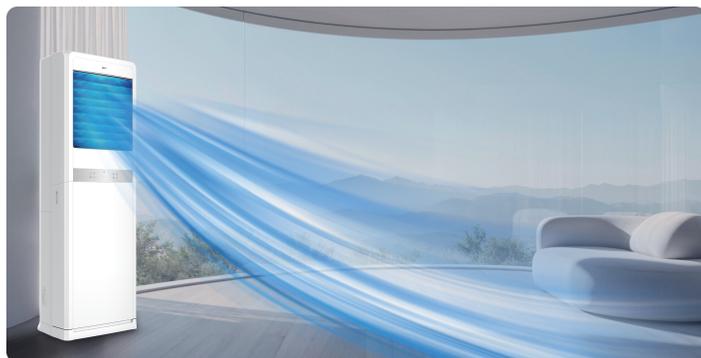

POWERFUL PERFORMANCE

Stable cooling performance in extreme temperatures up to **65°C**, paired with a newly optimized air duct design that delivers a powerful **2800m³/h** airflow for great comfort.

*Data source from AUX Lab, it may vary based on usage and condition.

Specifications

PRODUCT SPECIFICATION SHEET			Floor Standing
Model		Unit	ASTF-H60J7A2/ADAR3DI-C7
Rated Capacity	Cooling	W	17111
	Heating	W	17873
Rated Power Consumption	Cooling	W	4710
	Heating	W	4740
Rated Running Current	Cooling	A	20.5
	Heating	A	20.8
Max. Input Power		W	6500
Max. Input Current		A	29
EER Cooling		W/W	3.63
COP Heating		W/W	3.80
SEER Cooling		BTU/W	15.1
Power Supply Source		V/Ph/Hz	230/60
Refrigerant		/	R32
Noise Level		dB (A)	57
Noise Level		dB (A)	60
Indoor Unit Weight (Net)		Kg	45
Outdoor Unit Weight (Net)		Kg	91
IDU	Net Dimension (WidthxDepthxHeight)	mm	655x1945x495
	Packing Dimension (WidthxDepthxHeight)	mm	778x2145x598
Stop Valve	Liquid Valve	/	Dg8
	Gas Valve	/	Dg16
ODU	Compressor Brand	/	HIGHLY
	Net Dimension (WidthxDepthxHeight)	mm	940x1366x401
	Packing Dimension (WidthxDepthxHeight)	mm	1080x1490x460