

AUX
AIR CONDITIONER

APJ



Main selling points




LONG-DISTANCE AIR FLOW

Long-distance air supply, sufficient cold air. Our air conditioners offer superior airflow volume, providing greater comfort.



4D AIR FLOW

Multi-directional airflow blows up-down and left-right with 2 step motors.

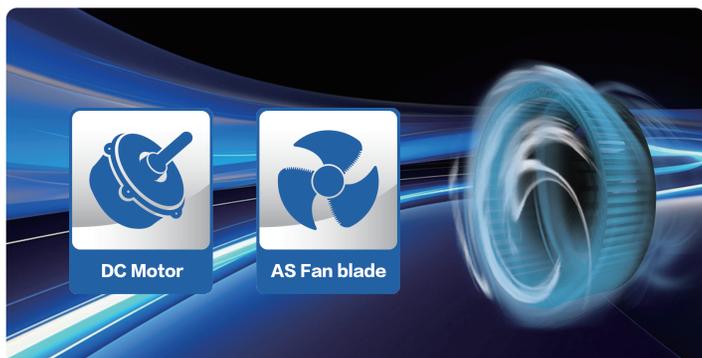

STRONG AIR OUTLET

Stronger air flow with stable operation in high temperature and long distance outlet.



MULTIPLE FAN SPEED

Equipped with high efficiency PG motor, from low to turbo, the user can choose desired air flow according to personal preference.

Specifications

PRODUCT SPECIFICATION SHEET				Floor Standing
Model			Unit	ASF-H48J4A4/APAR3DI-C0
Nameplate Parameter	Rated Capacity	Cooling	W	14000
		Heating	W	15000
	Rated Power Consumption	Cooling	W	5200
		Heating	W	4900
	Rated Running Current	Cooling	A	23
		Heating	A	22
	SEER Cooling		W/W	6.1
	SCOP Heating		W/W	4
	Power Supply Source		V/Ph/Hz	220-240V/50Hz
	Refrigerant			R32
	Air Flow Volume		m ³ /h	2050
	Noise Level		dB(A)	56
Noise Level		dB(A)	59	
Indoor Unit Weight (Net)		Kg	52	
	Outdoor Unit Weight (Net)		Kg	82
IDU Configuration	Dimension	Net Dimension (WidthxDepthxHeight)	mm	580x1925x400
		Packing Dimension (WidthxDepthxHeight)	mm	695x2075x555
Connection	Stop Valve	Liquid Valve	mm	9.52
		Gas Valve	mm	19
ODU Configuration	Compressor	Brand		GMCC
	Dimension	Net Dimension (WidthxDepthxHeight)	mm	940x1320x340
		Packing Dimension (WidthxDepthxHeight)	mm	1070x1445x450